

Machine Learning for Signal Processing

Lecture 1: Signal Representations

Class 1. 27 August 2012

Instructor: Bhiksha Raj


27 Aug 2012

11-755/18-797

1

What is a signal

- A mechanism for conveying information
 - Semaphores, gestures, traffic lights..
- Electrical engineering: currents, voltages
- Digital signals: Ordered collections of numbers that convey information
 - from a source to a destination
 - about a real world phenomenon
 - Sounds, images




27 Aug 2012

11-755/18-797

2

Signal Examples: Audio




- A sequence of numbers
 - $[n_1 \ n_2 \ n_3 \ n_4 \ \dots]$
 - The order in which the numbers occur is important
 - Ordered
 - In this case, a *time series*
 - Represent a perceivable sound

27 Aug 2012

11-755/18-797

3

Example: Images

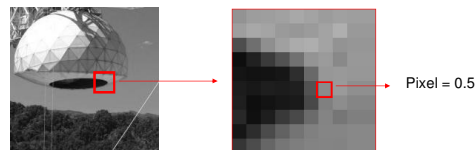

- A rectangular arrangement (matrix) of numbers
 - Or sets of numbers (for color images)
- Each pixel represents a visual representation of one of these numbers
 - 0 is minimum / black, 1 is maximum / white
 - Position / order is important

27 Aug 2012

11-755/18-797

4

What is Signal Processing

- Analysis, Interpretation, and Manipulation of signals.
 - Decomposition: Fourier transforms, wavelet transforms
 - Denoising signals
 - Coding: GSM, LPC, Jpeg, Mpeg, Ogg Vorbis
 - Detection: Radars, Sonars
 - Pattern matching: Biometrics, Iris recognition, finger print recognition
 - Etc.

27 Aug 2012

11-755/18-797

5

What is Machine Learning

- The science that deals with the development of algorithms that can learn from data
 - Learning patterns in data
 - Automatic categorization of text into categories; Market basket analysis
 - Learning to classify between different kinds of data
 - Spam filtering: Valid email or junk?
 - Learning to predict data
 - Weather prediction, movie recommendation
- Statistical analysis and pattern recognition when performed by a computer scientist..

27 Aug 2012

11-755/18-797

6

MLSP

- Application of Machine Learning techniques to the analysis of signals
 - Such as audio, images and video
- *Data driven* analysis of signals
 - *Characterizing* signals
 - What are they composed of?
 - *Detecting* signals
 - Radars. Face detection. Speaker verification
 - *Recognize* signals
 - Face recognition. Speech recognition.
 - *Predict* signals
 - Etc..

27 Aug 2012

11-755/18-797

7

MLSP: Fast growing field

- IEEE Signal Processing Society has an MLSP committee
- IEEE Workshop on Machine Learning for Signal Processing
 - Held this year in Santander, Spain.
- Several special interest groups
 - IEEE : multimedia and audio processing, machine learning and speech processing
 - ACM
 - ISCA
- Books
 - In work: MLSP, P. Smaragdis and B. Raj
- Courses (18797 was one of the first)
- Used everywhere
 - Biometrics: Face recognition, speaker identification
 - User interfaces: Gesture UIs, voice UIs, music retrieval
 - Data capture: OCR,. Compressive sensing
 - Network traffic analysis: Routing algorithms, vehicular traffic..
- Synergy with other topics (text / genome)

27 Aug 2012

11-755/18-797

8

In this course

- Jetting through fundamentals:
 - Linear Algebra, Signal Processing, Probability
- Machine learning concepts
 - Methods of modelling, estimation, classification, prediction
- Applications:
 - Sounds:
 - Characterizing sounds, Denoising speech, Synthesizing speech, Separating sounds in mixtures, Music retrieval
 - Images:
 - Characterization, Object detection and recognition, Biometrics
 - Representation
 - Sensing and recovery.
- Topics covered are representative
- Actual list to be covered may change, depending on how the course progresses

27 Aug 2012

11-755/18-797

9

Recommended Background

- DSP
 - Fourier transforms, linear systems, basic statistical signal processing
- Linear Algebra
 - Definitions, vectors, matrices, operations, properties
- Probability
 - Basics: what is a random variable, probability distributions, functions of a random variable
- Machine learning
 - Learning, modelling and classification techniques

27 Aug 2012

11-755/18-797

10

Guest Lectures

- Tom Sullivan
 - Basics of DSP
- Fernando de la Torre
 - Component Analysis
- Roger Dannenberg
 - Music Understanding
- Petros Boufounos (Mitsubishi)
 - Compressive Sensing
- Marios Savvides
 - Visual biometrics

27 Aug 2012

11-755/18-797

11

Travels..

- I will be travelling in September:
 - 3 Sep-15 Sep: Portland
 - 19 Sep-2 Oct: Europe
- Lectures in this period:
 - Recorded (by me) and/or
 - Guest lecturers
 - TA

27 Aug 2012

11-755/18-797

12

Schedule of Other Lectures

- Aug 30, **Sep 4** : Linear algebra refresher
- Sep 6: DSP refresher (Tom Sullivan), also **recorded**
- Sep 11: Component Analysis (De la Torre)
- Sep 13: Project Ideas (TA, Guests)
- Sep 18 : Eigen representations and Eigen faces
- Sep 20: Boosting, Face detection (TA: Prasanna)
- Sep 25: Component Analysis 2 (De La Torre)
- Sep 27: Clustering (Prasanna)
- Oct 2: Expectation Maximization (Sourish Chaudhuri)

27 Aug 2012

11-755/18-797

13

Schedule of Other Lectures

- Remaining schedule on website
 - May change a bit

27 Aug 2012

11-755/18-797

14

Grading

- Homework assignments : 50%
 - Mini projects
 - Will be assigned during course
 - Minimum 3, Maximum 4
 - You *will not catch up* if you slack on any homework
 - Those who didn't slack will also do the next homework
- Final project: 50%
 - Will be assigned early in course
 - Dec 6: Poster presentation for all projects, with demos (if possible)
 - Partially graded by visitors to the poster

27 Aug 2012

11-755/18-797

15

Projects

- Previous projects (partially) accessible from web pages for prior years
- Expect significant supervision
- Outcomes from previous years
 - 10+ papers
 - 2 best paper awards
 - 1 PhD thesis
 - 2 Masters' theses


27 Aug 2012

11-755/18-797

16

Instructor and TA

- Instructor: Prof. Bhiksha Raj
 - Room 6705 Hillman Building
 - bhiksha@cs.cmu.edu
 - 412 268 9826



- TA:
 - Prasanna Kumar
 - pmuthuku@cs.cmu.edu
- Office Hours:
 - Bhiksha Raj: Mon 3:00-4:00
 - TA: TBD

27 Aug 2012

11-755/18-797

17

Additional Administtrivia

- Website:
 - <http://mlsp.cs.cmu.edu/courses/fall2012/>
 - Lecture material will be posted on the day of each class on the website
 - Reading material and pointers to additional information will be on the website
- Mailing list:
 - mlsp-2012@lists.andrew.cmu.edu

27 Aug 2012

11-755/18-797

18

Representing Data

- Audio
 - Images
 - Video
- Other types of signals
 - In a manner similar to one of the above


27 Aug 2012

11-755/18-797

19

What is an audio signal

- A typical digital audio signal
 - It's a sequence of points

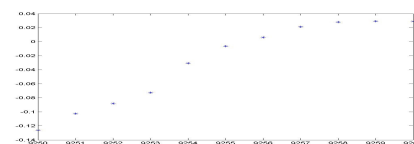


27 Aug 2012

11-755/18-797

20

Where do these numbers come from?

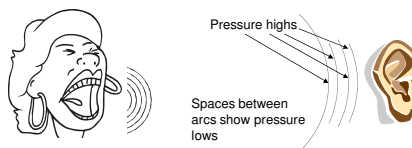


- Any sound is a pressure wave: alternating highs and lows of air pressure moving through the air
- When we speak, we produce these pressure waves
 - Essentially by producing puff after puff of air
 - Any sound producing mechanism actually produces pressure waves
- These pressure waves move the eardrum
 - Highs push it in, lows suck it out
 - We sense these motions of our eardrum as "sound"

27 Aug 2012

11-755/18-797

21

SOUND PERCEPTION

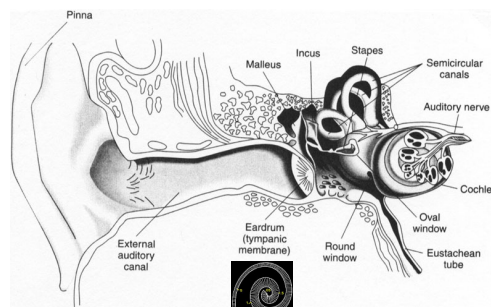


27 Aug 2012

11-

22

Storing pressure waves on a computer

- The pressure wave moves a diaphragm
 - On the microphone
- The motion of the diaphragm is converted to continuous variations of an electrical signal
 - Many ways to do this
- A "sampler" samples the continuous signal at regular intervals of time and stores the numbers

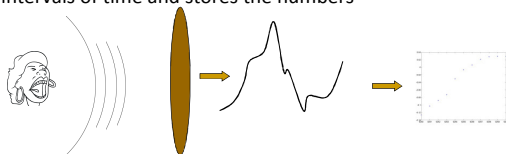


27 Aug 2012

11-755/18-797

23

Are these numbers sound?

- How do we even know that the numbers we store on the computer have anything to do with the recorded sound really?
 - Recreate the sense of sound
- The numbers are used to control the levels of an electrical signal




27 Aug 2012

11-755/18-797

24

Are these numbers sound?

- How do we even know that the numbers we store on the computer have anything to do with the recorded sound really?
 - Recreate the sense of sound
- The numbers are used to control the levels of an electrical signal
- The electrical signal moves a diaphragm back and forth to produce a pressure wave
 - That we sense as sound

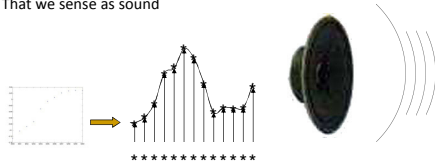


27 Aug 2012

11-755/18-797

25

How many samples a second

- Convenient to think of sound in terms of sinusoids with frequency
- Sounds may be modelled as the sum of many sinusoids of different frequencies
 - Frequency is a physically motivated unit
 - Each hair cell in our inner ear is tuned to specific frequency
- Any sound has many frequency components
 - We can hear frequencies up to 16000Hz
 - Frequency components above 16000Hz can be heard by children and some young adults
 - Nearly nobody can hear over 20000Hz.




27 Aug 2012

11-755/18-797

26

Signal representation - Sampling

- Sampling frequency (or sampling rate)** refers to the number of samples taken a second
- Sampling rate is measured in Hz
 - We need a sample rate twice as high as the highest frequency we want to represent (Nyquist freq)
- For our ears this means a sample rate of at least 40kHz
 - Because we hear up to 20kHz




27 Aug 2012

11-755/18-797

27

Aliasing

- Low sample rates result in *aliasing*
 - High frequencies are misrepresented
 - Frequency f_1 will become (sample rate $- f_1$)
 - In video also when you see wheels go backwards

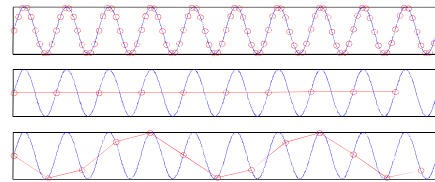


27 Aug 2012

11-755/18-797

28

Aliasing examples


Sinusoid sweeping from 0Hz to 20kHz

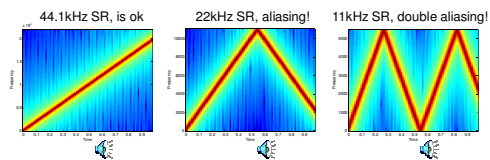


On real sounds



On images



On video




27 Aug 2012

11-755/18-797

29

Avoiding Aliasing



- Sound naturally has all perceivable frequencies
 - And then some
 - Cannot control the rate of variation of pressure waves in nature
- Sampling at *any* rate *will* result in aliasing
- Solution: *Filter the electrical signal* before sampling it
 - Cut off all frequencies above sampling.frequency/2
 - E.g., to sample at 44.1Khz, filter the signal to eliminate all frequencies above 22050 Hz

27 Aug 2012

11-755/18-797

30

Typical Sampling Rates

- Common sample rates
 - For speech 8kHz to 16kHz
 - For music 32kHz to 44.1kHz
 - Pro-equipment 96kHz

27 Aug 2012

11-755/18-797

31

Storing numbers on the Computer

- Sound is the outcome of a continuous range of variations
 - The pressure wave can take any value (within limits)
 - The diaphragm can also move continuously
 - The electrical signal from the diaphragm has continuous variations
- A computer has finite resolution
 - Numbers can only be stored to finite resolution
 - E.g. a 16-bit number can store only 65536 values, while a 4-bit number can store only 16 values
 - To store the sound wave on the computer, the continuous variation must be "mapped" on to the discrete set of numbers we can store

27 Aug 2012



11-755/18-797

32

Mapping signals into bits

- Example of 1-bit sampling table

Signal Value	Bit sequence	Mapped to
$S > 2.5v$	1	$1 * \text{const}$
$S \leq 2.5v$	0	0



27 Aug 2012



11-755/18-797

33

Mapping signals into bits

- Example of 2-bit sampling table

Signal Value	Bit sequence	Mapped to
$S \geq 3.75v$	11	$3 * \text{const}$
$3.75v > S \geq 2.5v$	10	$2 * \text{const}$
$2.5v > S \geq 1.25v$	01	$1 * \text{const}$
$1.25v > S \geq 0v$	00	0




27 Aug 2012

11-755/18-797

34

Storing the signal on a computer

- The original signal
- 8 bit quantization
- 3 bit quantization
- 2 bit quantization
- 1 bit quantization

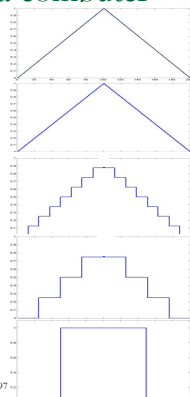


27 Aug 2012

11-755/18-797

35

Tom Sullivan Says his Name

- 16 bit sampling
- 5 bit sampling
- 4 bit sampling
- 3 bit sampling
- 1 bit sampling

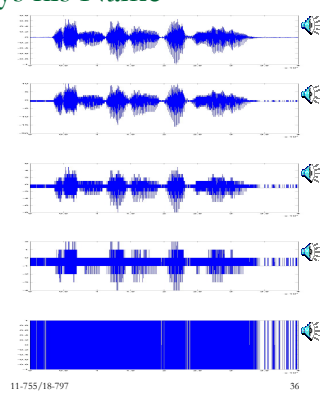


27 Aug 2012

11-755/18-797


36

A Schubert Piece


- 16 bit sampling




- 5 bit sampling



- 4 bit sampling



- 3 bit sampling



- 1 bit sampling



27 Aug 2012

11-755/18-797

57

Quantization Formats

- Sampling can be uniform

- Sample values equally spaced out

Signal Value	Bits	Mapped to
$S \geq 3.75v$	11	$3 * \text{const}$
$3.75v > S \geq 2.5v$	10	$2 * \text{const}$
$2.5v > S \geq 1.25v$	01	$1 * \text{const}$
$1.25v > S \geq 0v$	0	0



- Or nonuniform

Signal Value	Bits	Mapped to
$S \geq 4v$	11	$4.5 * \text{const}$
$4v > S \geq 2.5v$	10	$3.25 * \text{const}$
$2.5v > S \geq 1v$	01	$1.25 * \text{const}$
$1.0v > S \geq 0v$	0	$0.5 * \text{const}$




27 Aug 2012

11-755/18-797

38

Uniform Quantization

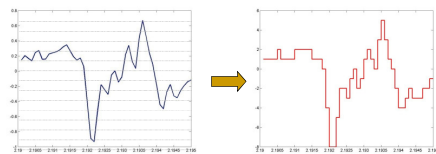


- At the sampling instant, the actual value of the waveform is rounded off to the nearest level permitted by the quantization
- Values entirely outside the range are quantized to either the highest or lowest values

27 Aug 2012

11-755/18-797

39

Non-uniform Sampling

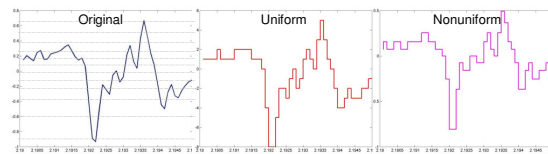


- Quantization levels are non-uniformly spaced
- At the sampling instant, the actual value of the waveform is rounded off to the nearest level permitted by the quantization
- Values entirely outside the range are quantized to either the highest or lowest values

27 Aug 2012


11-755/18-797

40

Uniform Quantization

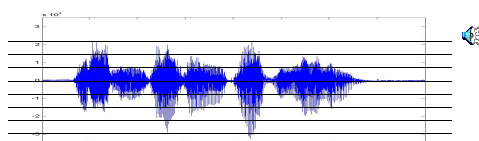

UPON BEING SAMPLED AT ONLY 3 BITS (8 LEVELS)

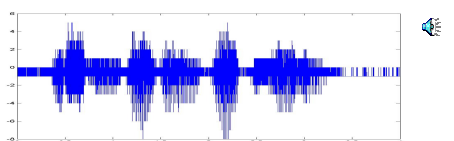


27 Aug 2012

11-755/18-797

41

Uniform Quantization

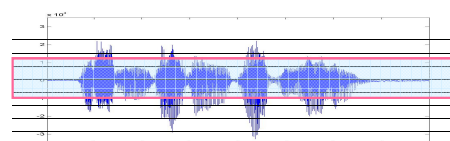


- There is a lot more action in the central region than outside.
- Assigning only four levels to the busy central region and four entire levels to the sparse outer region is inefficient
- Assigning more levels to the central region and less to the outer region can give better fidelity
- for the same storage

27 Aug 2012

11-755/18-797

42

Non-uniform Quantization

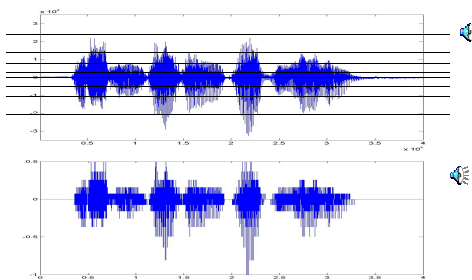


- Assigning more levels to the central region and less to the outer region can give better fidelity for the same storage

27 Aug 2012

11-755/18-797

43

Non-uniform Quantization

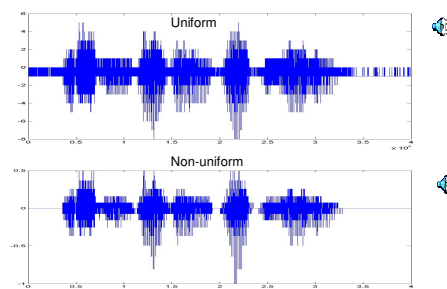


- Assigning more levels to the central region and less to the outer region can give better fidelity for the same storage

27 Aug 2012

11-755/18-797

44

Non-uniform Sampling

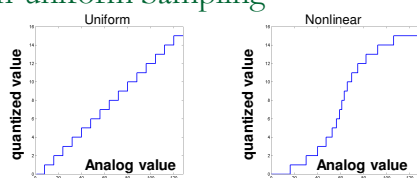

- Uniform sampling maps uniform widths of the analog signal to units steps of the quantized signal
- In "standard" *non-uniform* sampling the step sizes are smaller near 0 and wider farther away
 - The curve that the steps are drawn on follow a logarithmic law:
 - Mu Law: $Y = C \cdot \log(1 + mX/C)/(1+m)$
 - A Law: $Y = C \cdot (1 + \log(a \cdot X)/C)/(1+a)$
- One can get the same perceptual effect with 8bits of non-uniform sampling as 12bits of uniform sampling

27 Aug 2012

11-755/18-797

45

Dealing with audio

Signal Value	Bits	Mapped to	Signal Value	Bits	Mapped to
$S \geq 3.75v$	11	3	$S \geq 4v$	11	4.5
$3.75v > S \geq 2.5v$	10	2	$4v > S \geq 2.5v$	10	3.25
$2.5v > S \geq 1.25v$	01	1	$2.5v > S \geq 1v$	01	1.25
$1.25v > S \geq 0v$	0	0	$1.0v > S \geq 0v$	0	0.5

- Capture / read audio in the format provided by the file or hardware
 - Linear PCM, Mu-law, A-law,
- Convert to 16-bit PCM value
 - I.e. map the bits onto the number on the right column
 - This mapping is typically provided by a table computed from the sample compression function
 - No lookup for data stored in PCM
- Conversion from Mu law:
 - <http://www.speech.cs.cmu.edu/comp.speech/Section2/Q2.7.html>

27 Aug 2012

11-755/18-797

46

Images




27 Aug 2012

11-755/18-797

47

Images

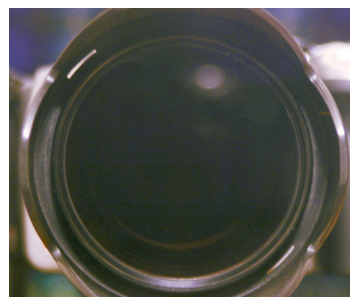


27 Aug 2012

11-755/18-797

48

The Eye

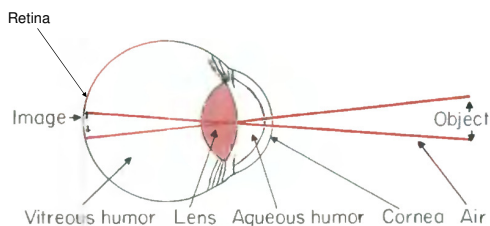


Basic Neuroscience: Anatomy and Physiology Arthur C. Guyton, M.D. 1987 W.B.Saunders Co.

27 Aug 2012

11-755/18-797

49

The Retina

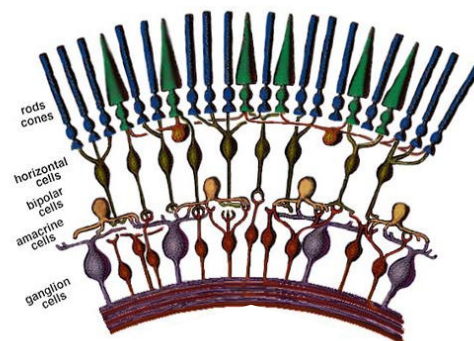

27 Aug 2012

11-755/18-797

50

<http://www.brad.ac.uk/acad/lifesci/ophometry/resources/modules/stage1/ppp1/Retina.html>

Rods and Cones

- Separate Systems
- Rods
 - Fast
 - Sensitive
 - Grey scale
 - predominate in the periphery
- Cones
 - Slow
 - Not so sensitive
 - Fovea / Macula
 - COLOR!




27 Aug 2012

11-755/18-797

51

Basic Neuroscience: Anatomy and Physiology Arthur C. Guyton, M.D. 1987 W.B.Saunders Co.

The Eye




- The density of cones is highest at the fovea
 - The region immediately surrounding the fovea is the macula
 - The most important part of your eye: damage == blindness
- Peripheral vision is almost entirely black and white
- Eagles are bifoveate
- Dogs and cats have no fovea, instead they have an elongated slit

27 Aug 2012

11-755/18-797

52

Spatial Arrangement of the Retina

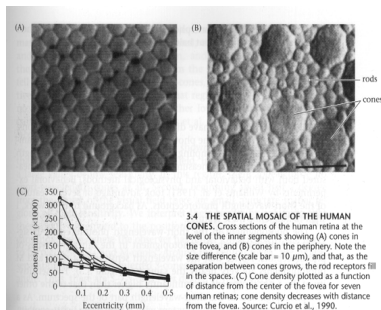


(From Foundations of Vision, by Brian Wandell, Sinauer Assoc.)

27 Aug 2012

11-755/18-797

53

Three Types of Cones (trichromatic vision)



27 Aug 2012

11-755/18-797

54

Trichromatic Vision


- So-called “blue” light sensors respond to an entire range of frequencies
 - Including in the so-called “green” and “red” regions
- The difference in response of “green” and “red” sensors is small
 - Varies from person to person
 - Each person really sees the world in a different color
 - If the two curves get too close, we have color blindness
 - Ideally traffic lights should be red and blue

27 Aug 2012

11-755/18-797

55

White Light




27 Aug 2012

11-755/18-797

56

Response to White Light




?

27 Aug 2012

11-755/18-797

57

Response to White Light

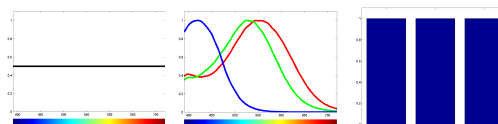


27 Aug 2012

11-755/18-797

58

Response to Sparse Light

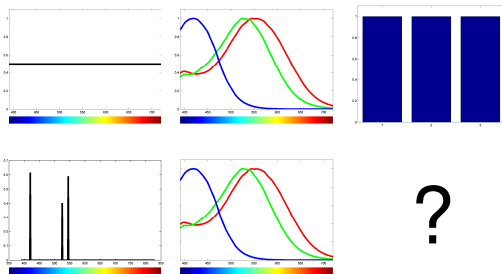


?

27 Aug 2012

11-755/18-797

59

Response to Sparse Light

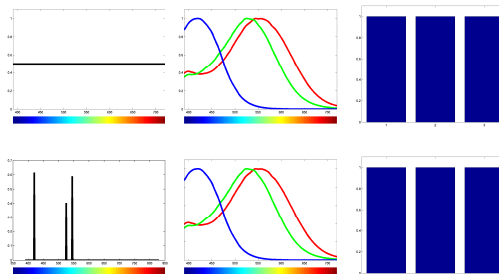


27 Aug 2012

11-755/18-797

60

Human perception anomalies

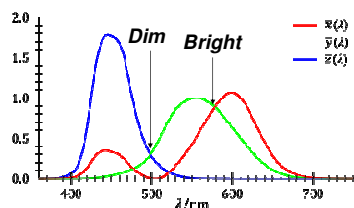


- The same intensity of monochromatic light will result in different *perceived* brightness at different wavelengths
- Many combinations of wavelengths can produce the same sensation of colour.
- Yet humans can distinguish 10 million colours

27 Aug 2012

11-755/18-797

61

Representing Images



- Utilize trichromatic nature of human vision
 - Sufficient to trigger each of the three cone types in a manner that produces the sensation of the desired color
 - A tetrachromatic animal would be very confused by our computer images
 - Some new-world monkeys are tetrachromatic
- The three "chosen" colors are red (650nm), green (510nm) and blue (475nm)
 - By appropriate combinations of these colors, the cones can be excited to produce a very large set of colours
 - Which is still a small fraction of what we can actually see
 - How many colours? ...


27 Aug 2012

11-755/18-797

62

The "CIE" colour space

- From experiments done in the 1920s by W. David Wright and John Guild
 - Subjects adjusted x, y, and z on the right of a circular screen to match a colour on the left
- X, Y and Z are normalized responses of the three sensors
 - $X + Y + Z$ is 1.0
 - Normalized to have to total net intensity
- The image represents all colours we can see
 - The outer curve represents monochromatic light
 - X, Y and Z as a function of λ
 - The lower line is the line of purples
 - End of visual spectrum
- The CIE chart was updated in 1960 and 1976
 - The newer charts are less popular


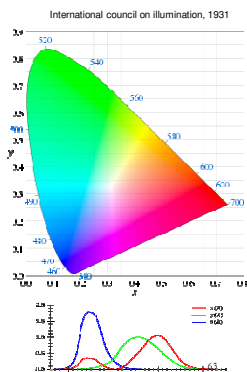


27 Aug 2012

11-755/18-797

What is displayed

- The RGB triangle
 - Colours outside this area cannot be matched by additively combining only 3 colours
 - Any other set of monochromatic colours would have a differently restricted area
 - TV images can never be like the real world
- Each corner represents the (X,Y,Z) coordinate of one of the three "primary" colours used in images
- In reality, this represents a very tiny fraction of our visual acuity
 - Also affected by the quantization of levels of the colours



27 Aug 2012

11-755/18-797

Representing Images on Computers

- Greyscale: a single matrix of numbers
 - Each number represents the intensity of the image at a specific location in the image
 - Implicitly, $R = G = B$ at all locations
- Color: 3 matrices of numbers
 - The matrices represent different things in different representations
 - RGB Colorspace: Matrices represent intensity of Red, Green and Blue
 - CMYK Colorspace: Cyan, Magenta, Yellow
 - YIQ Colorspace..
 - HSV Colorspace..


27 Aug 2012

11-755/18-797

65

Computer Images: Grey Scale

$R = G = B$. Only a single number need be stored per pixel






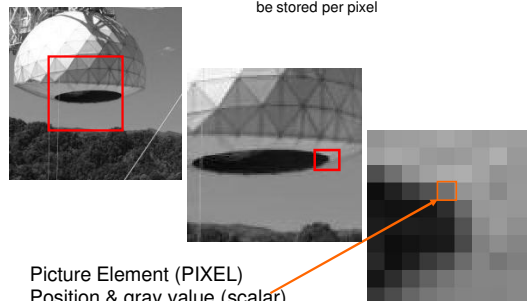


Picture Element (PIXEL)
Position & gray value (scalar)



27 Aug 2012

11-755/18-797

66

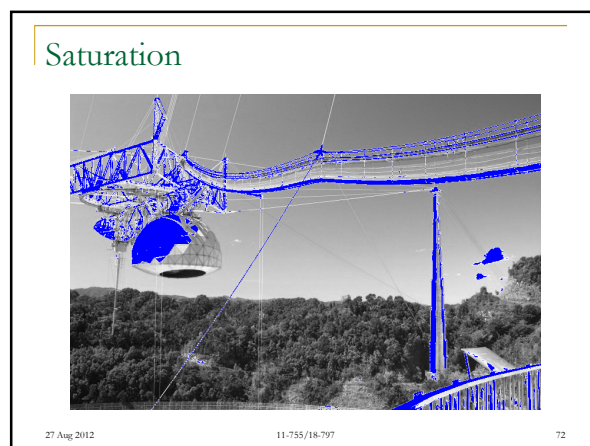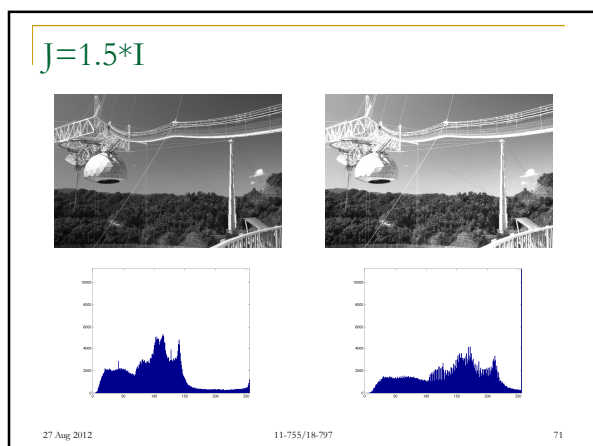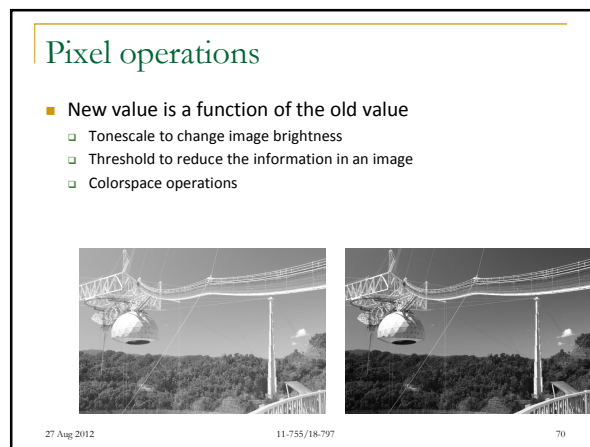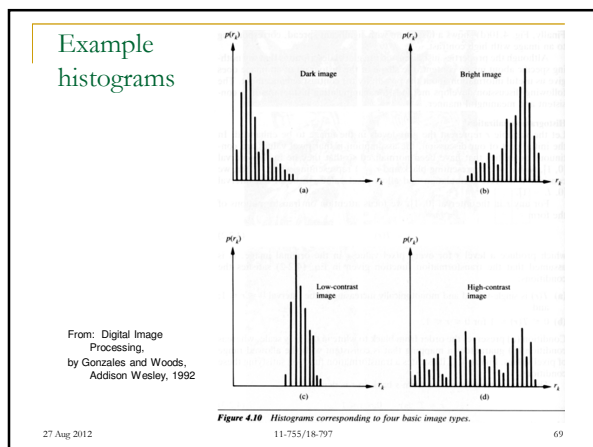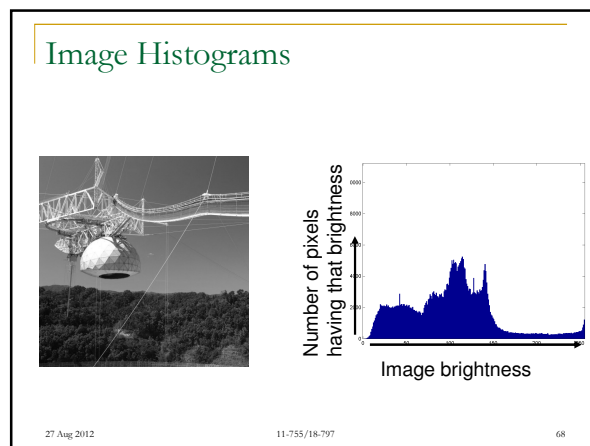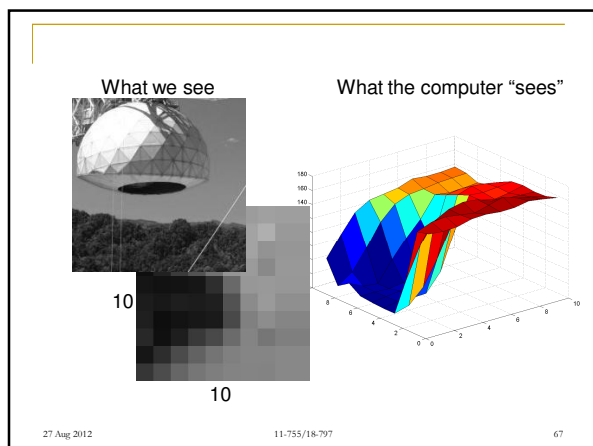

$$J = 0.5 * I$$





27 Aug 2012

11-755/18-797

73

$$J = \text{uint8}(0.75 * I)$$




27 Aug 2012

11-755/18-797

74

What's this?



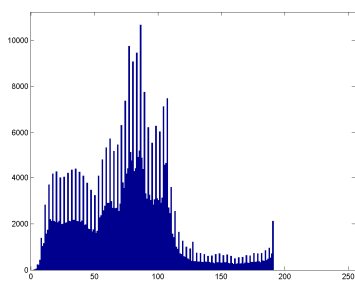


27 Aug 2012

11-755/18-797

75

Non-Linear Darken






27 Aug 2012

11-755/18-797

76

Non-Linear Lighten





27 Aug 2012

11-755/18-797

77

Linear vs. Non-Linear




27 Aug 2012

11-755/18-797

78

Color Images

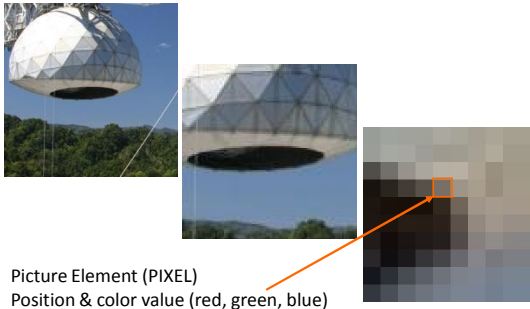


27 Aug 2012

11-755/18-797

79

RGB Representation

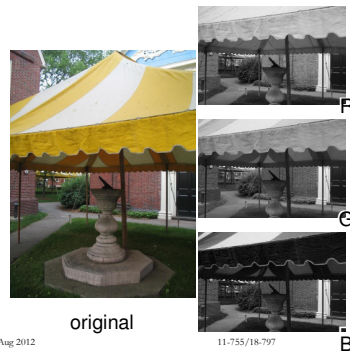


27 Aug 2012

11-755/18-797

80

RGB Manipulation Example: Color Balance

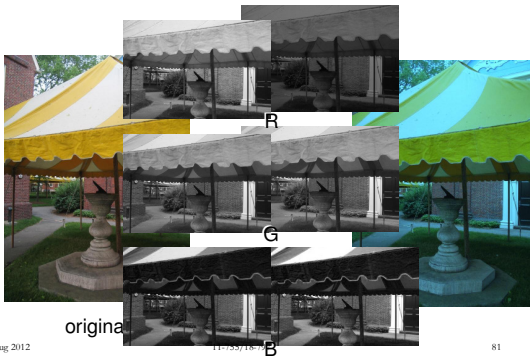


27 Aug 2012

11-755/18-797

81

The CMYK color space



Represent colors in terms of cyan, magenta, and yellow


- The "K" stands for "Key", not "black"

27 Aug 2012

11-755/18-797

82

CMYK is a *subtractive* representation



- RGB is based on *composition*, i.e. it is an additive representation
 - Adding equal parts of red, green and blue creates white
- What happens when you mix red, green and blue paint?
 - Clue – paint colouring is subtractive..
- CMYK is based on *masking*, i.e. it is subtractive
 - The base is white
 - Masking it with equal parts of C, M and Y creates Black
 - Masking it with C and Y creates Green
 - Yellow masks blue
 - Masking it with M and Y creates Red
 - Magenta masks green
 - Masking it with M and C creates Blue
 - Cyan masks green
 - Designed specifically for *printing*
 - As opposed to rendering

27 Aug 2012

11-755/18-797

83

An Interesting Aside



- Paints create subtractive coloring
 - Each paint masks out some colours
 - Mixing paint subtracts combinations of colors
 - Paintings represent subtractive colour masks
- In the 1880s Georges-Pierre Seurat pioneered an *additive-colour* technique for painting based on "pointilism"
 - How do you think he did it?

27 Aug 2012


11-755/18-797

84

NTSC color components

Y = "luminance"
I = "red-green"
Q = "blue-yellow"

a.k.a. YUV although
YUV is actually the
color specification
for PAL video




27 Aug 2012

11-755/18-797

85

YIQ Color Space

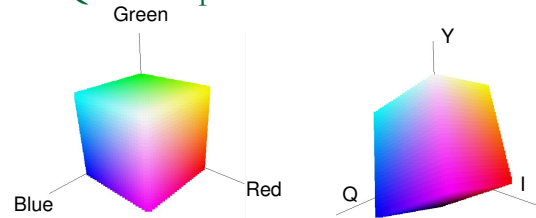


$$\begin{bmatrix} Y \\ I \\ Q \end{bmatrix} = \begin{bmatrix} .299 & .587 & .114 \\ .596 & -.275 & -.321 \\ .212 & -.523 & .311 \end{bmatrix} \begin{bmatrix} R \\ G \\ B \end{bmatrix}$$

27 Aug 2012

11-755/18-797

86

Color Representations

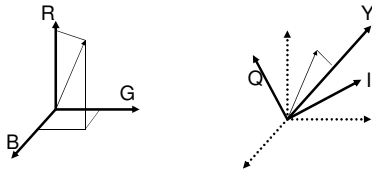

- Y value lies in the same range as R,G,B ([0,1])
- I is to [-0.59 0.59]
- Q is limited to [-0.52 0.52]
- Takes advantage of lower human sensitivity to I and Q axes

27 Aug 2012

11-755/18-797

87

YIQ




- Top: Original image
- Second: Y
- Third: I (displayed as red-cyan)
- Fourth: Q (displayed as green-magenta)
 - From <http://wikipedia.org/>
- Processing (e.g. histogram equalization) only needed on Y
 - In RGB must be done on all three colors. Can distort image colors
 - A black and white TV only needs Y

27 Aug 2012

11-755/18-797

88

Bandwidth (transmission resources) for the components of the television signal

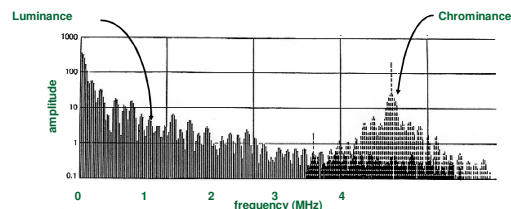


Understanding image perception allowed NTSC to add color to the black and white television signal. The eye is more sensitive to I than Q, so lesser bandwidth is needed for Q. Both together used much less than Y, allowing for color to be added for minimal increase in transmission bandwidth.

27 Aug 2012

11-755/18-797

89

Hue, Saturation, Value

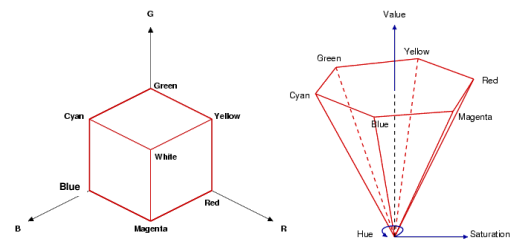

$$V = [0,1], S = [0,1] \\ H = [0,360]$$

The HSV Colour Model By Mark Roberts
<http://www.cs.bham.ac.uk/~mer/colour/hsv.html>


27 Aug 2012

11-755/18-797

90

HSV

- **V = Intensity**
 - 0 = Black
 - 1 = Max (white at S = 0)
- **S = 1:**
 - As H goes from 0 (Red) to 360, it represents a different combinations of 2 colors
- As $S \rightarrow 0$, the color components from the opposite side of the polygon increase



$$V = [0,1], S = [0,1] \\ H = [0,360]$$

27 Aug 2012

11-755/18-797


91

Hue, Saturation, Value

$$h = \begin{cases} 0, & \text{if } \max = \min \\ (60^\circ \times \frac{r-b}{\max-\min} + 360^\circ) \bmod 360^\circ, & \text{if } \max = r \\ 60^\circ \times \frac{b-r}{\max-\min} + 120^\circ, & \text{if } \max = g \\ 60^\circ \times \frac{r-g}{\max-\min} + 240^\circ, & \text{if } \max = b \end{cases}$$

$$s = \begin{cases} 0, & \text{if } \max = 0 \\ \frac{\max-\min}{\max} = 1 - \frac{\min}{\max}, & \text{otherwise} \end{cases}$$

$$v = \max$$



Max is the maximum of (R,G,B)
Min is the minimum of (R,G,B)


27 Aug 2012

11-755/18-797

92

HSV

- Top: Original image
- Second H (assuming S = 1, V = 1)
- Third S (H=0, V=1)
- Fourth V (H=0, S=1)

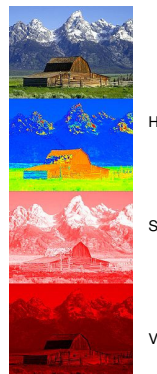

27 Aug 2012

11-755/18-797

93

Quantization and Saturation

- Captured images are typically quantized to N-bits
- Standard value: 8 bits
- 8-bits is not very much $< 1000:1$
- Humans can easily accept 100,000:1
- And most cameras will give you 6-bits anyway...

27 Aug 2012

11-755/18-797

94

Processing Colour Images

- Typically work only on the Grey Scale image
 - Decode image from whatever representation to RGB
 - $GS = R + G + B$
- The Y of YIQ may also be used
 - Y is a linear combination of R,G and B
- For specific algorithms that deal with colour, individual colours may be maintained
 - Or any linear combination that makes sense may be maintained.

27 Aug 2012

11-755/18-797

95

Reference Info

- Many books
 - Digital Image Processing, by Gonzales and Woods, Addison Wesley, 1992
 - Computer Vision: A Modern Approach, by David A. Forsyth and Jean Ponce
 - Spoken Language Processing: A Guide to Theory, Algorithm and System Development, by Xuedong Huang, Alex Acero and Hsiao-Wuen Hon

27 Aug 2012

11-755/18-797

96