

# Cache Memories

15-213: Introduction to Computer Systems  
11<sup>th</sup> Lecture, Oct. 1, 2013

**Instructors:**

Randy Bryant, Dave O'Hallaron, and Greg Kesden


# Today

- **Cache memory organization and operation**
- **Performance impact of caches**
  - The memory mountain
  - Rearranging loops to improve spatial locality
  - Using blocking to improve temporal locality


# Memory Hierarchies

- **Some fundamental and enduring properties of hardware and software:**
  - Fast storage technologies cost more per byte, have less capacity, and require more power (heat!).
  - The gap between CPU and main memory speed is widening.
  - Well-written programs tend to exhibit good locality.
- **These fundamental properties complement each other beautifully.**
- **They suggest an approach for organizing memory and storage systems known as a **memory hierarchy**.**

# An Example Memory Hierarchy

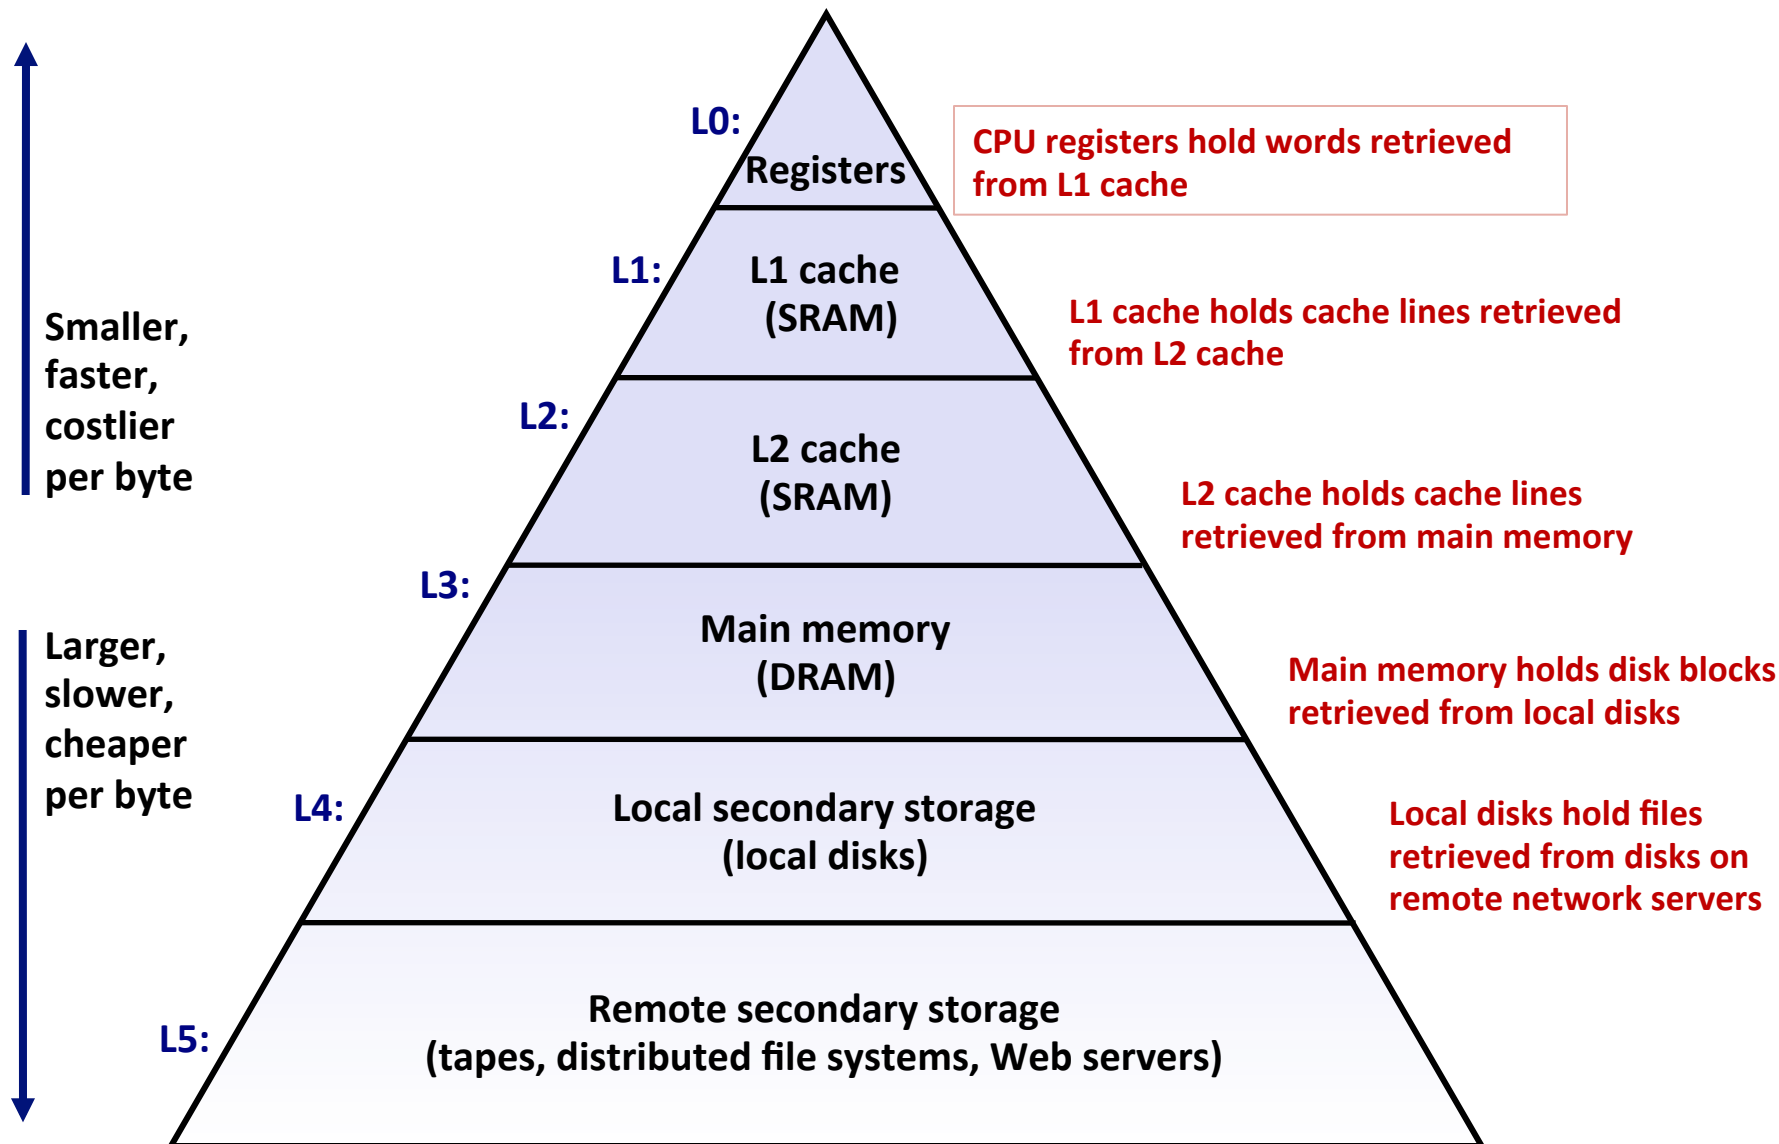

# General Cache Concept

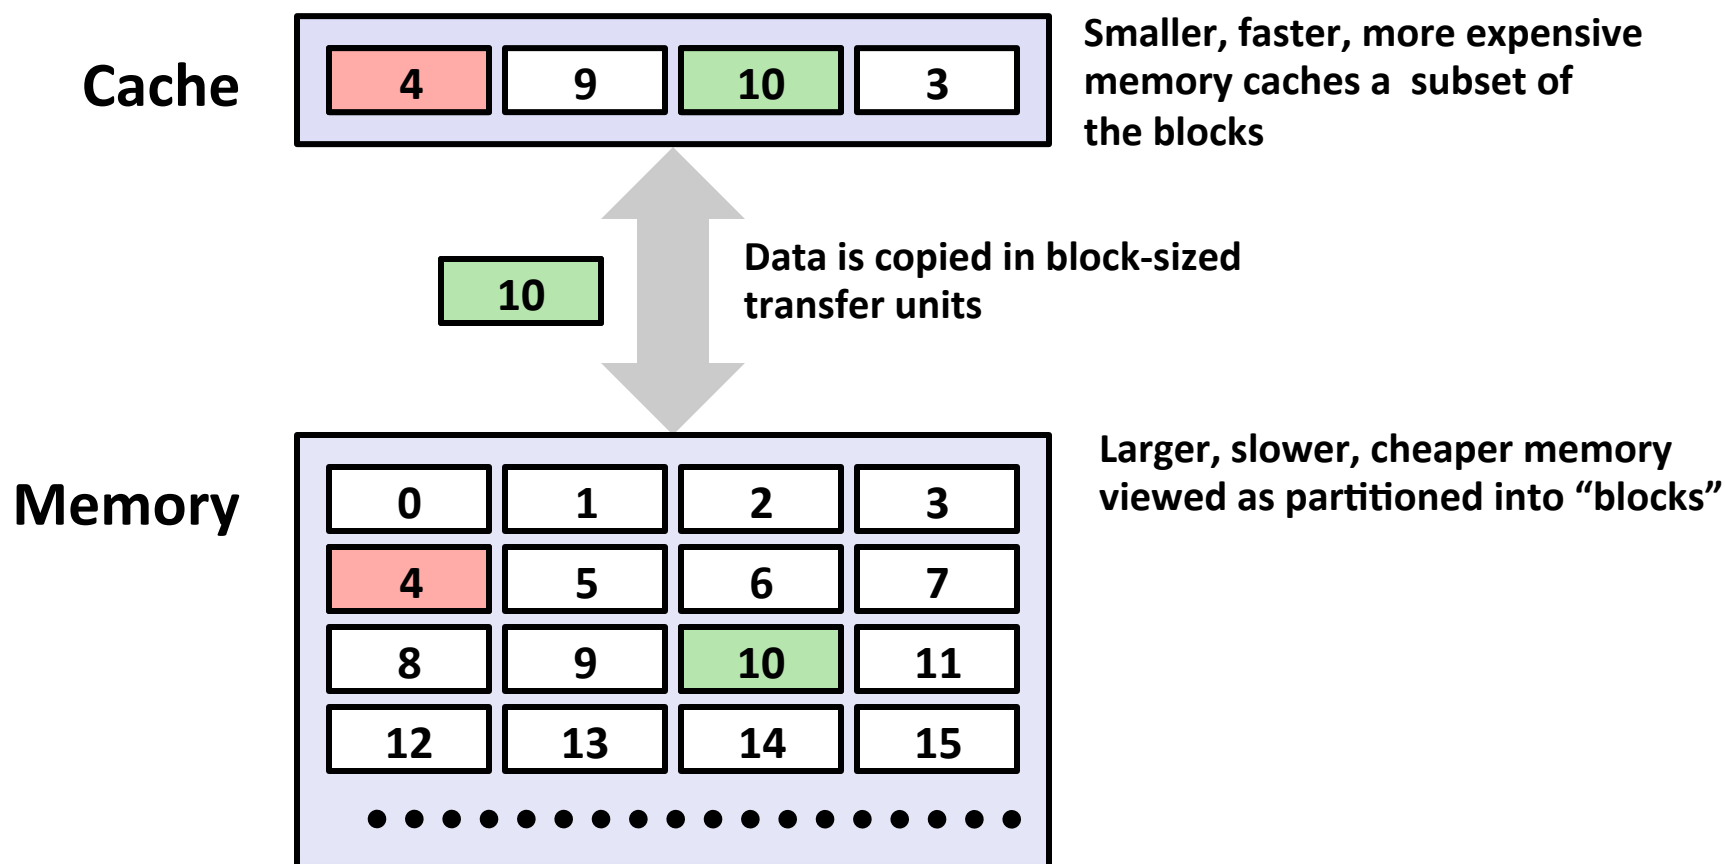

# Many types of caches

## ■ Examples


- Hardware: L1, L2, L3 cache memories, TLBs, ...
- Software: Virtual memory, FS buffers, Web browser caches, ...

## ■ Hardware cache memories


- Significant impact on program performance
- Topic of today's lecture

# Cache Memories

- **Cache memories** are small, fast SRAM-based memories managed automatically in hardware
  - Hold frequently accessed blocks of main memory
- CPU looks first for data in cache, then in main memory
- Typical system structure:

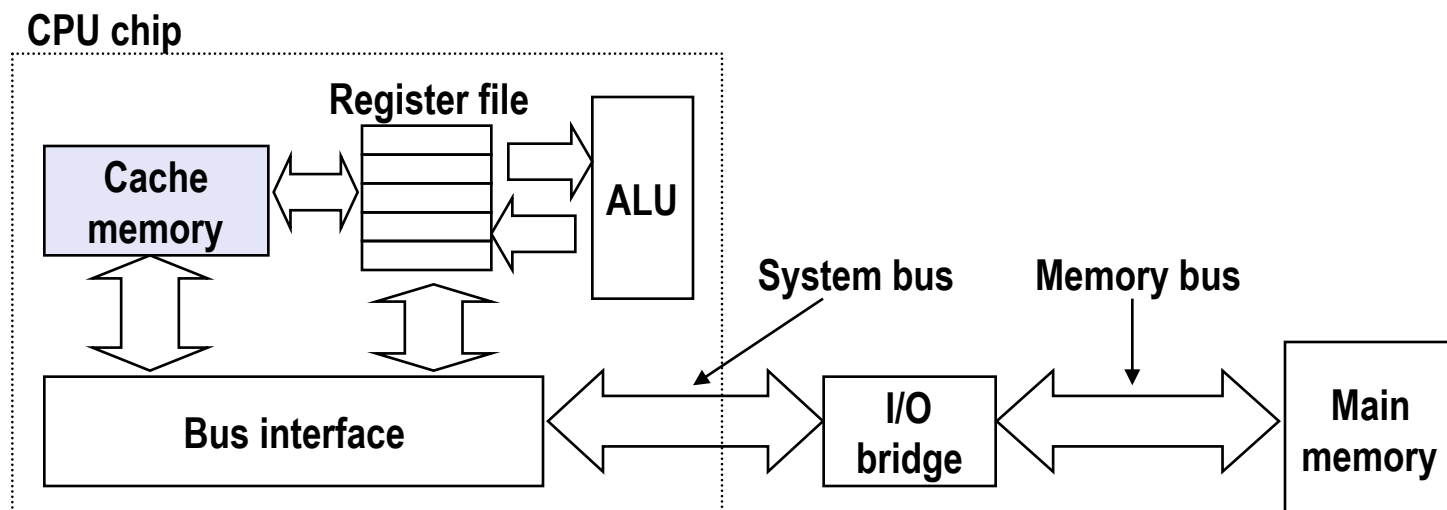


# General Cache Organization (S, E, B)

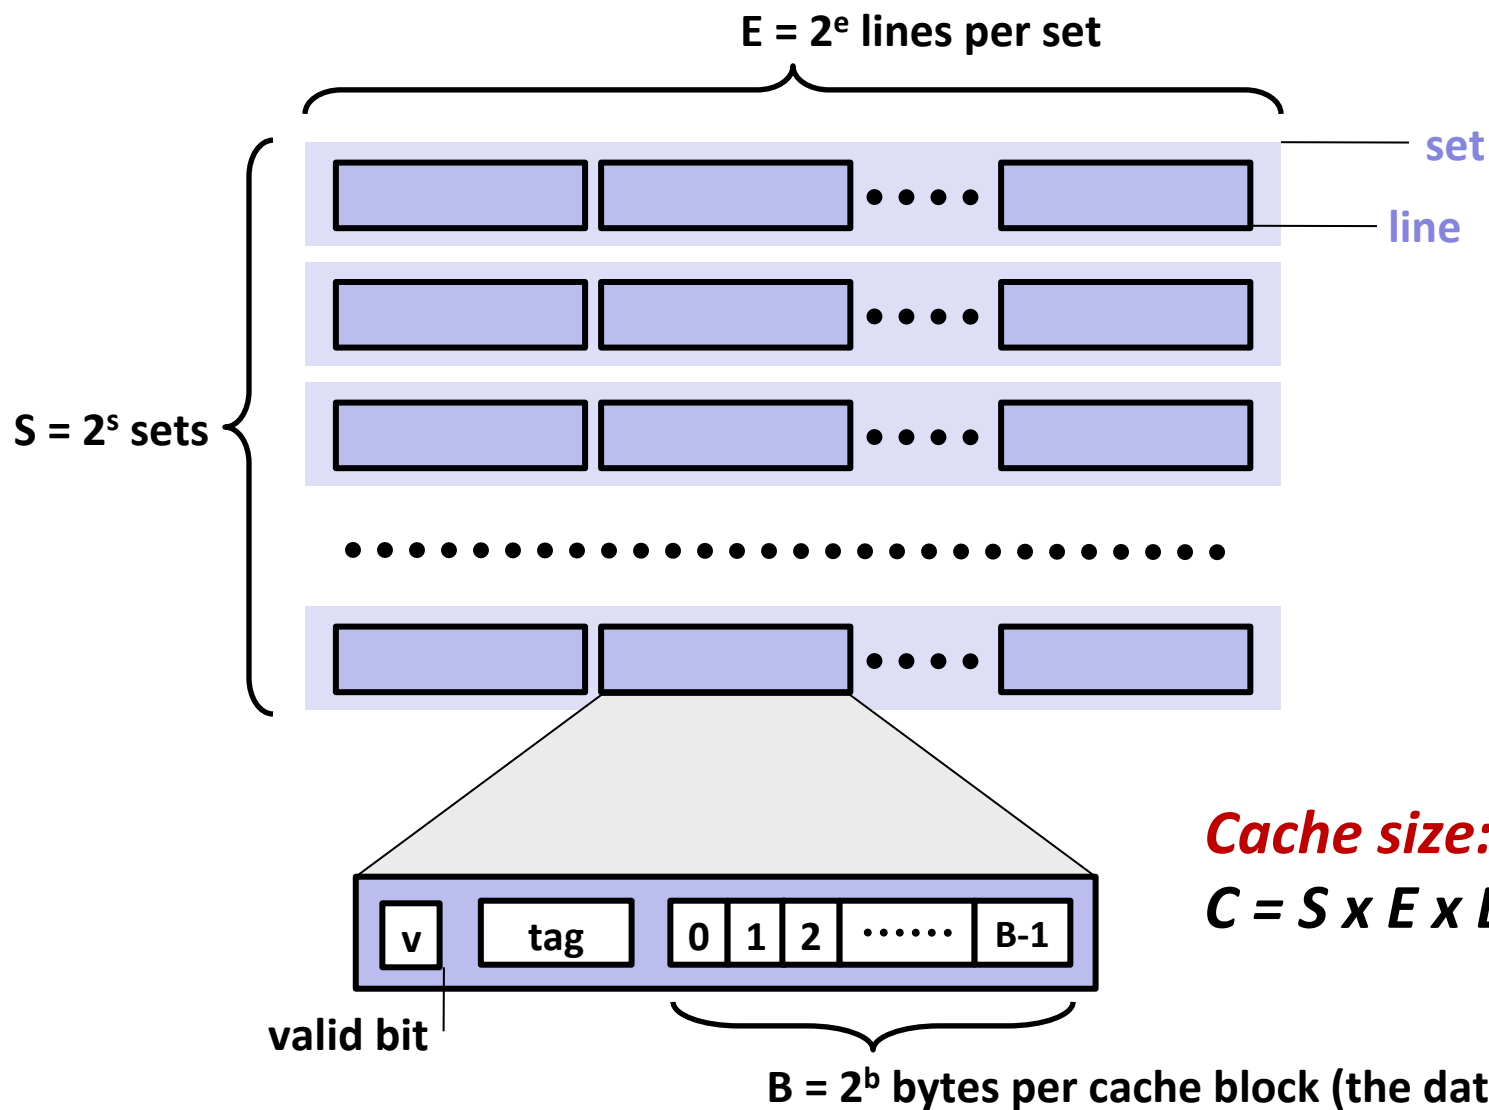




# Cache Read

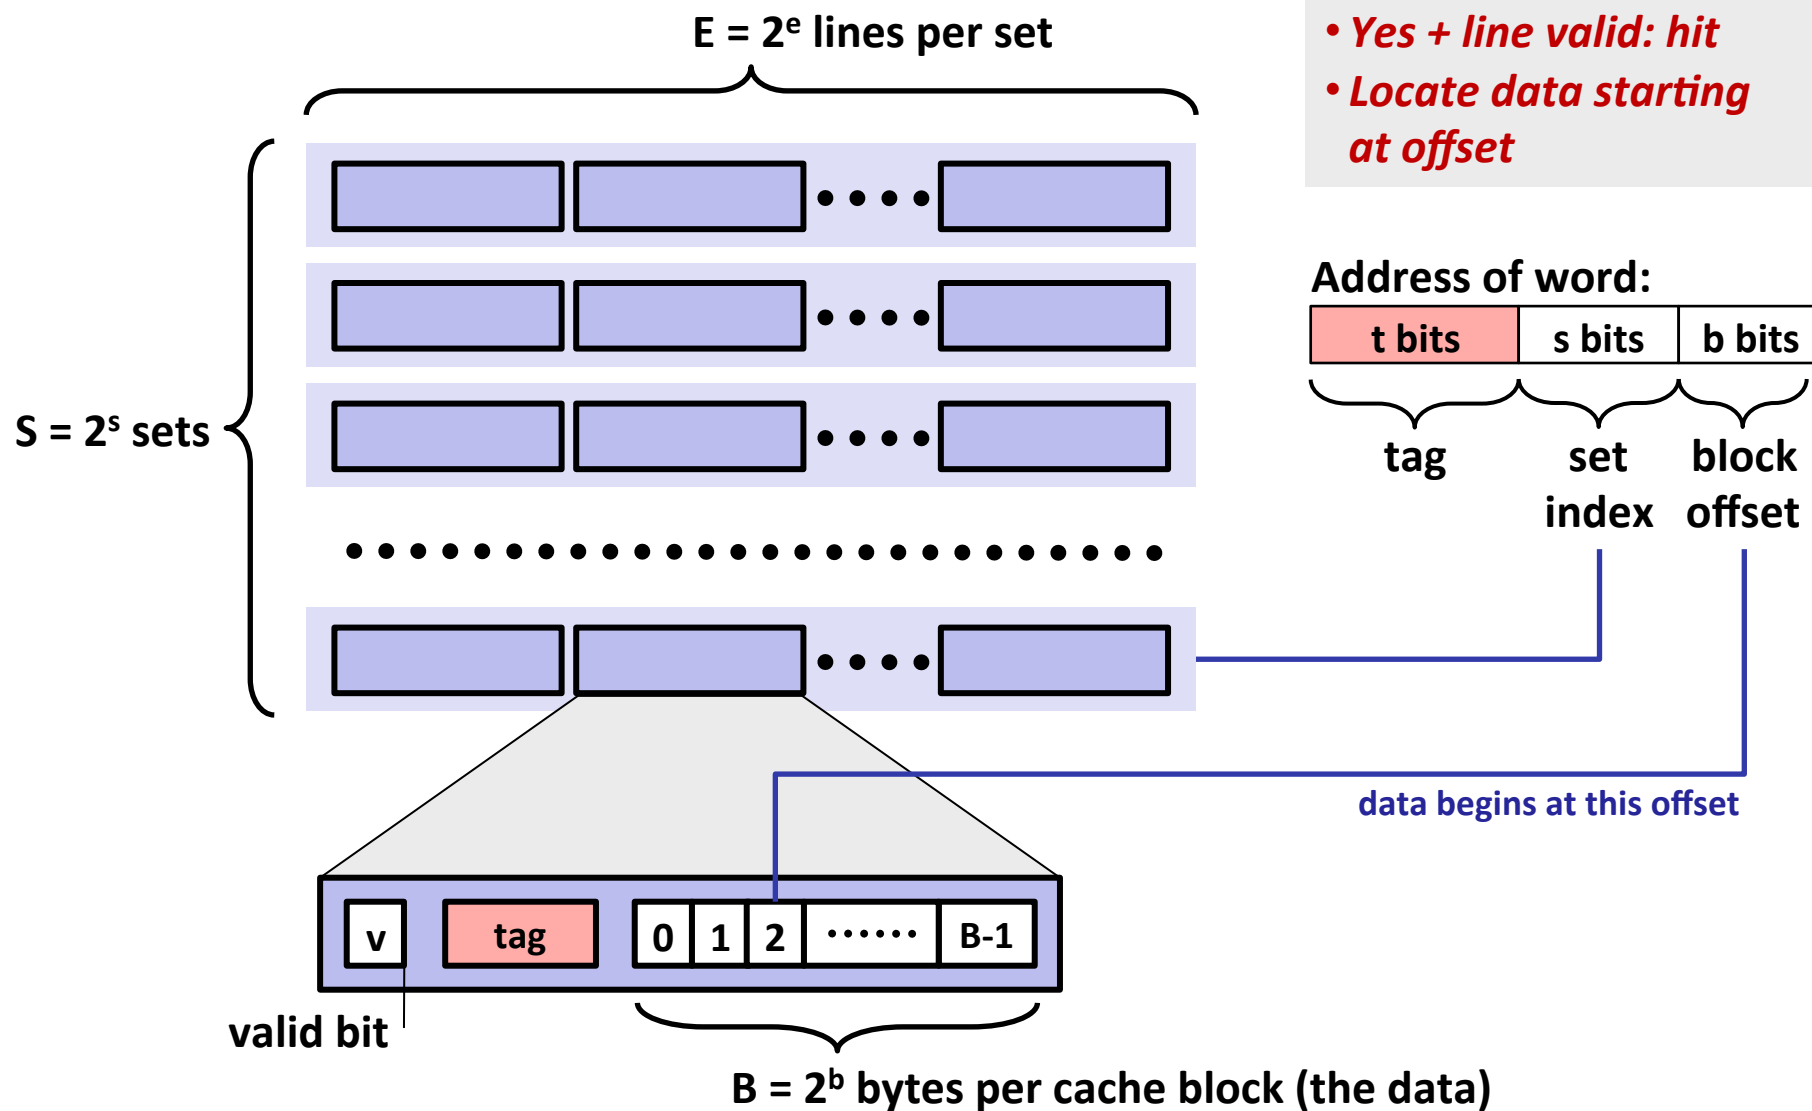

# Example: Direct Mapped Cache (E = 1)

Direct mapped: One line per set


Assume: cache block size 8 bytes

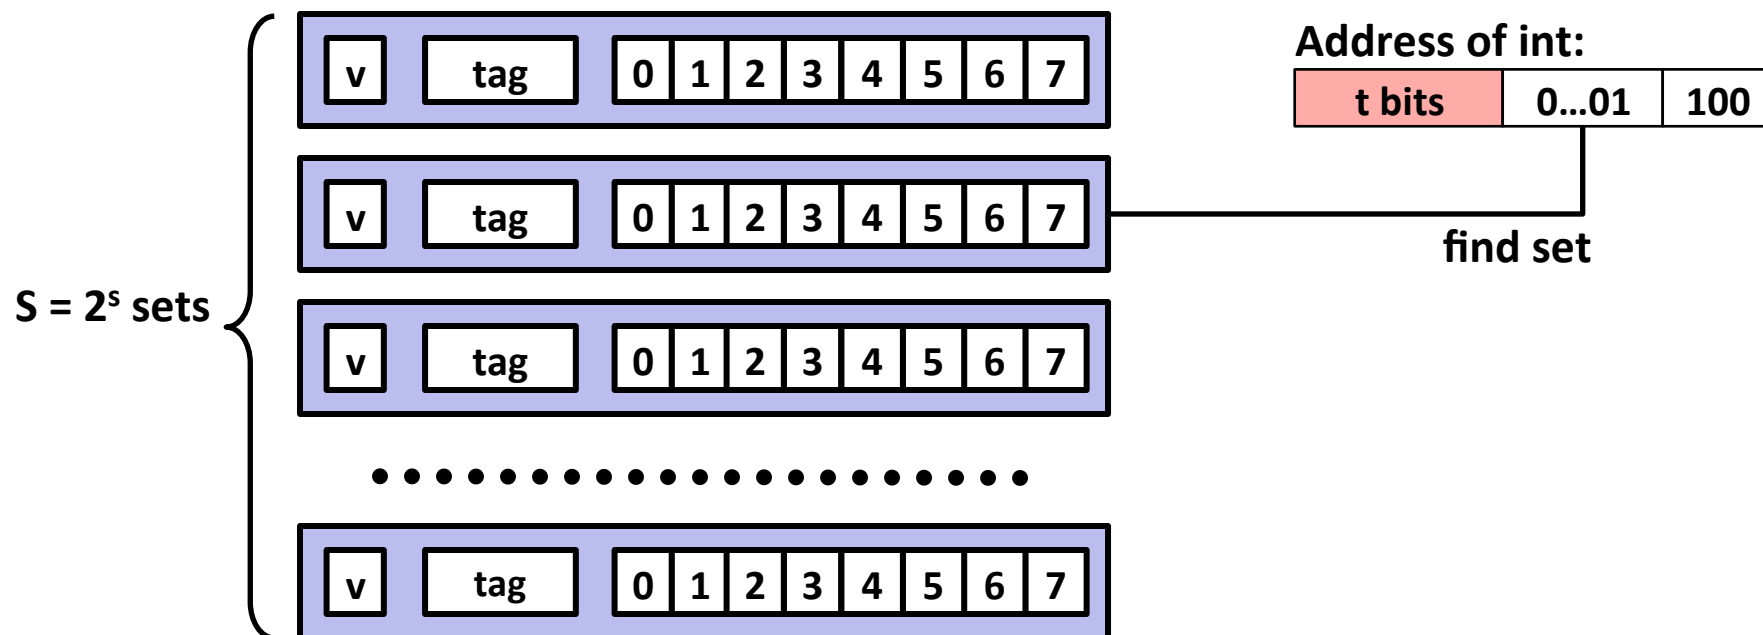

# Example: Direct Mapped Cache (E = 1)

Direct mapped: One line per set


Assume: cache block size 8 bytes

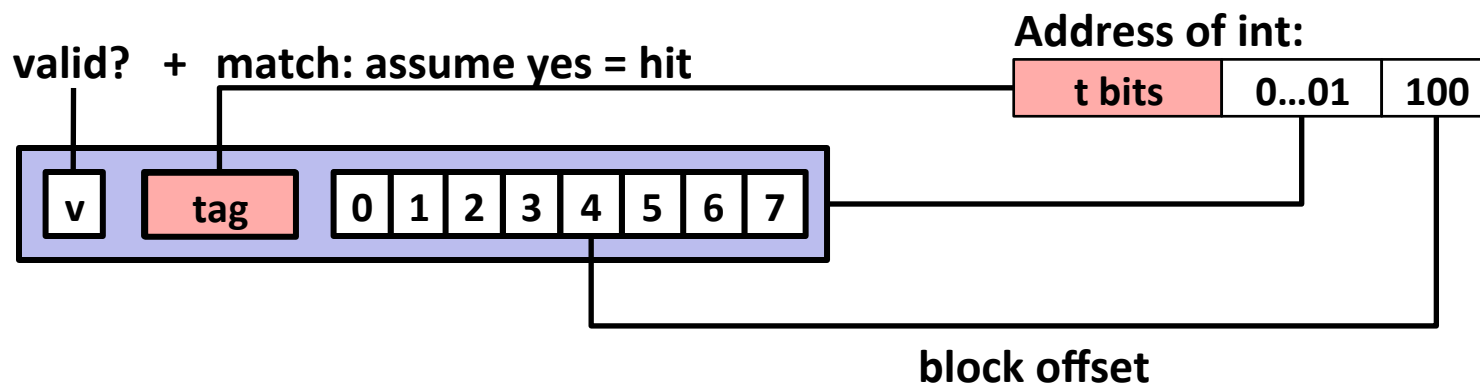

# Example: Direct Mapped Cache (E = 1)

Direct mapped: One line per set

Assume: cache block size 8 bytes

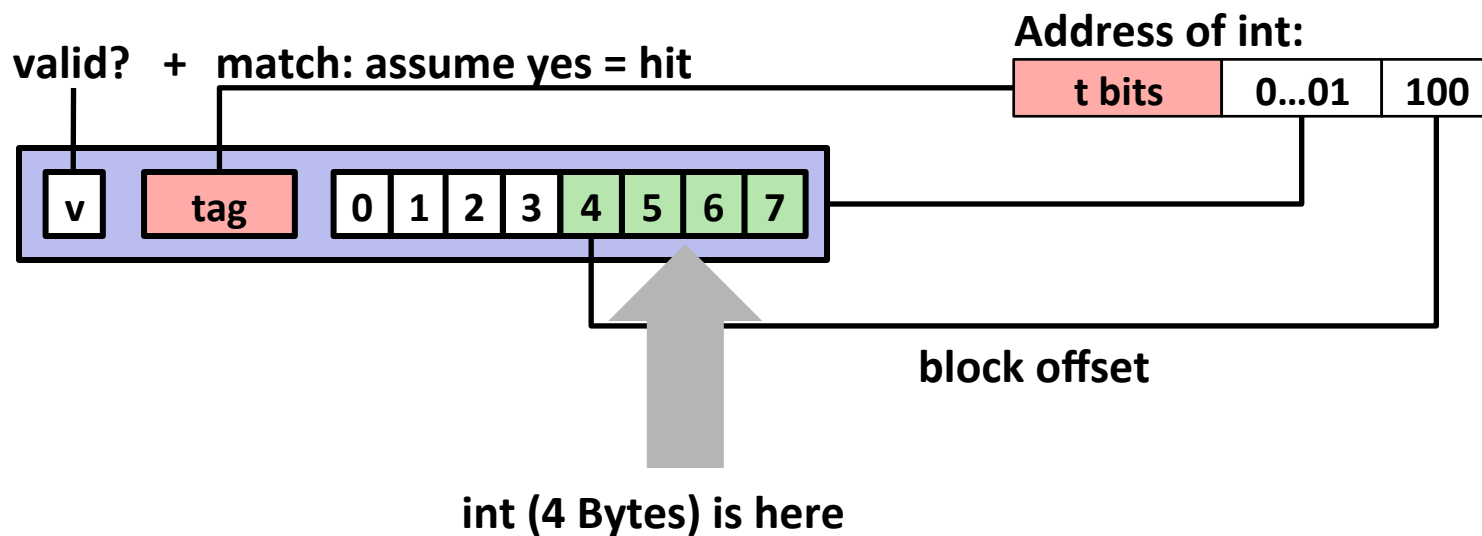

**If tag doesn't match:** old line is evicted and replaced

# Direct-Mapped Cache Simulation

t=1	s=2	b=1
x	xx	x

M=16 bytes (4-bit addresses), B=2 bytes/block,  
S=4 sets, E=1 Blocks/set

Address trace (reads, one byte per read):

0	[0000 <sub>2</sub> ],	miss
1	[0001 <sub>2</sub> ],	hit
7	[0111 <sub>2</sub> ],	miss
8	[1000 <sub>2</sub> ],	miss
0	[0000 <sub>2</sub> ]	miss

	v	Tag	Block
Set 0	1	0	M[0-1]
Set 1			
Set 2			
Set 3	1	0	M[6-7]


# E-way Set Associative Cache (Here: E = 2)

E = 2: Two lines per set

Assume: cache block size 8 bytes

Address of short int:


t bits	0...01	100
--------	--------	-----

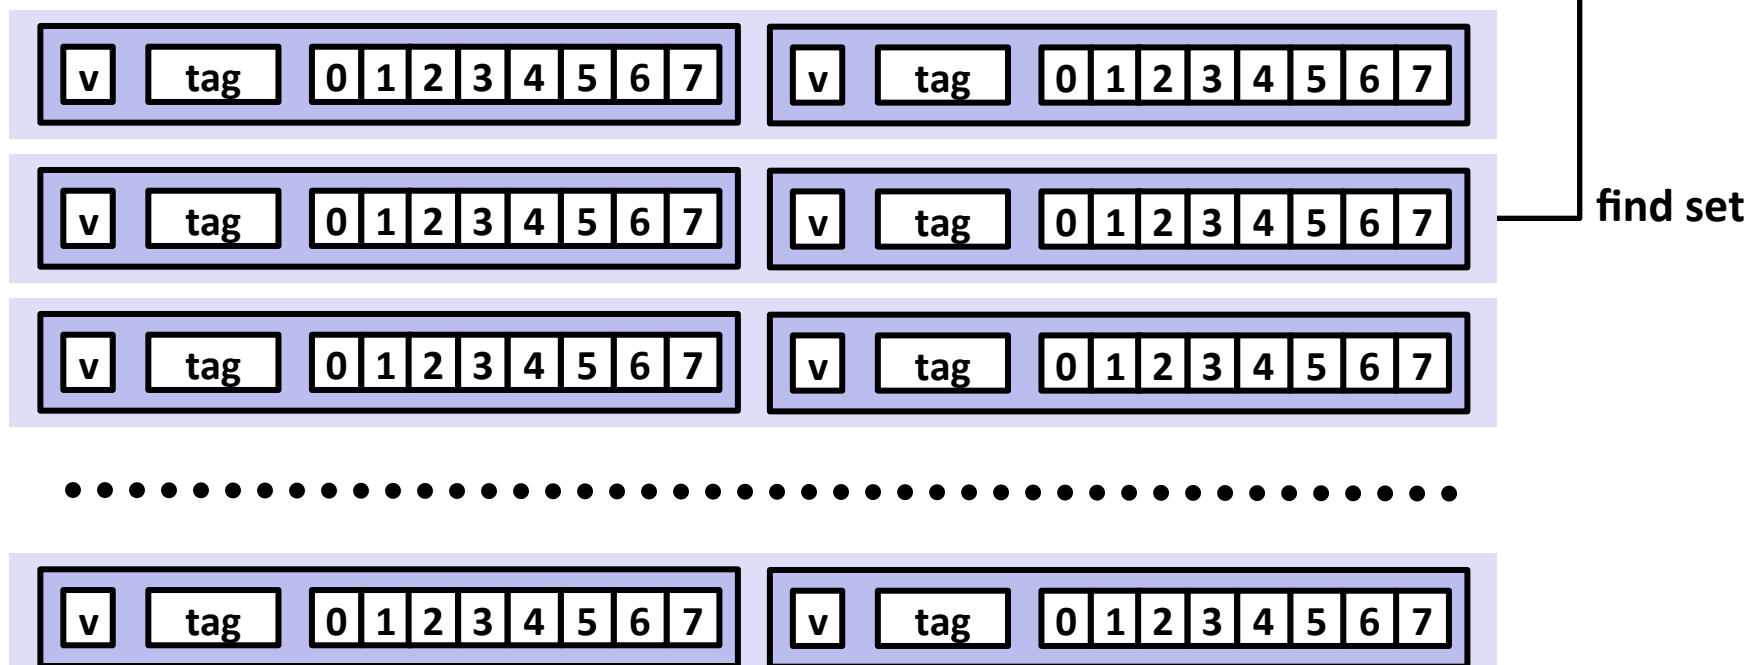

# E-way Set Associative Cache (Here: E = 2)

E = 2: Two lines per set


Assume: cache block size 8 bytes

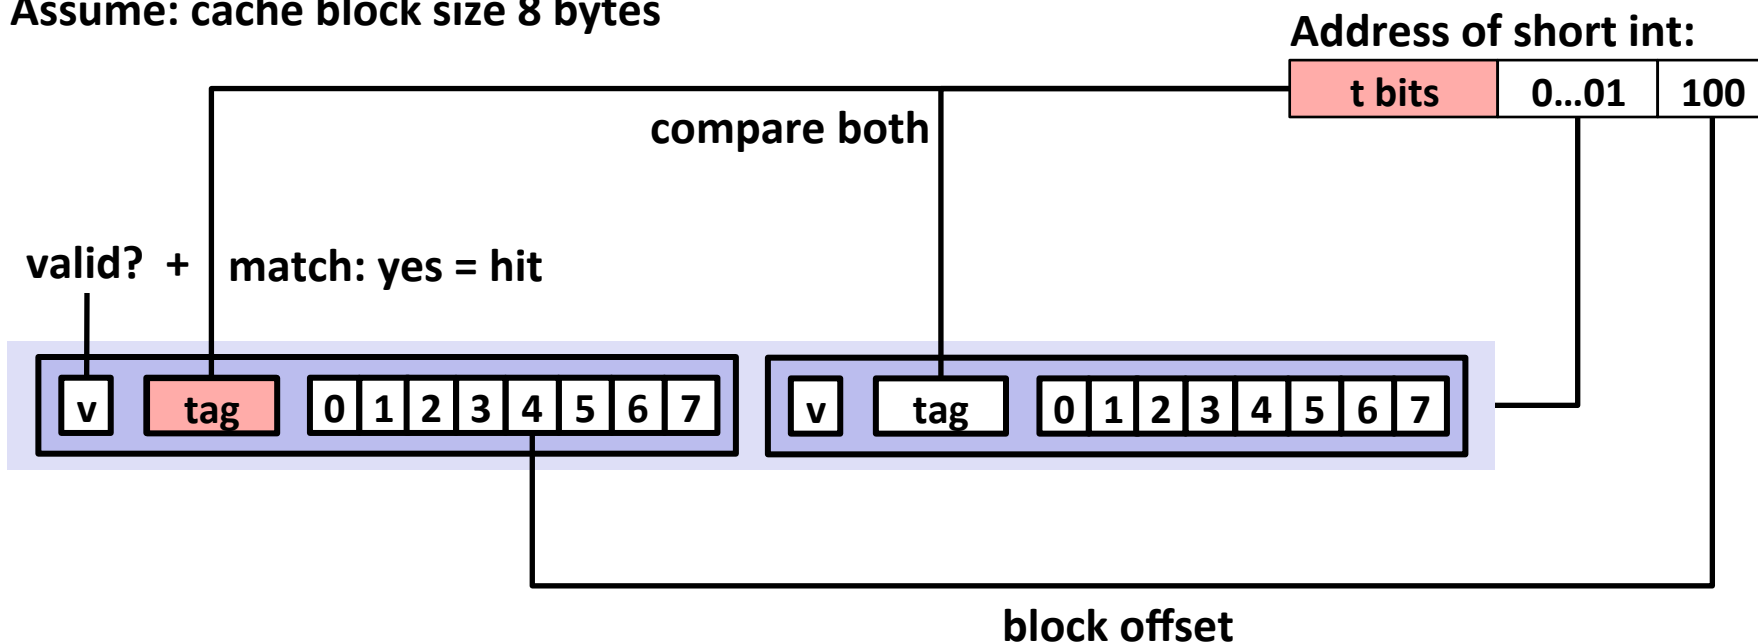

# E-way Set Associative Cache (Here: E = 2)

E = 2: Two lines per set

Assume: cache block size 8 bytes

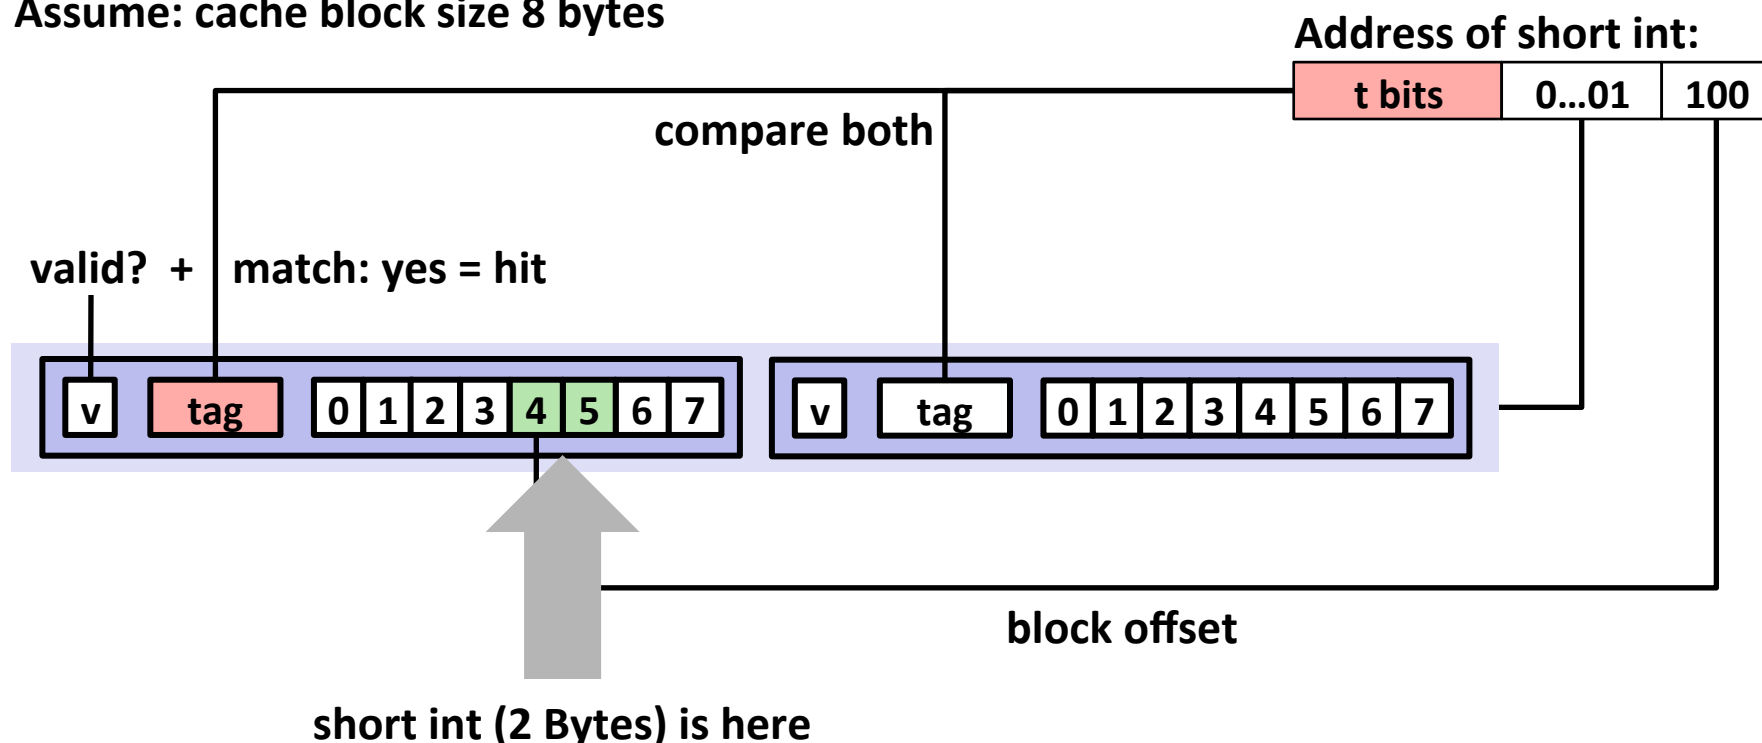

## No match:

- One line in set is selected for eviction and replacement
- Replacement policies: random, least recently used (LRU), ...



# 2-Way Set Associative Cache Simulation

t=2	s=1	b=1
xx	x	x

M=16 byte addresses, B=2 bytes/block,  
S=2 sets, E=2 blocks/set

Address trace (reads, one byte per read):

0	[00 <u>00</u> <sub>2</sub> ],	miss
1	[00 <u>01</u> <sub>2</sub> ],	hit
7	[01 <u>11</u> <sub>2</sub> ],	miss
8	[10 <u>00</u> <sub>2</sub> ],	miss
0	[00 <u>00</u> <sub>2</sub> ]	hit

	v	Tag	Block
Set 0	1	00	M[0-1]
	1	10	M[8-9]
Set 1	1	01	M[6-7]
	0		

# What about writes?

## ■ Multiple copies of data exist:

- L1, L2, L3, Main Memory, Disk

## ■ What to do on a write-hit?

- **Write-through** (write immediately to memory)
- **Write-back** (defer write to memory until replacement of line)
  - Need a dirty bit (line different from memory or not)

## ■ What to do on a write-miss?


- **Write-allocate** (load into cache, update line in cache)
  - Good if more writes to the location follow
- **No-write-allocate** (writes straight to memory, does not load into cache)

## ■ Typical

- Write-through + No-write-allocate
- **Write-back + Write-allocate**

# Intel Core i7 Cache Hierarchy

## Processor package

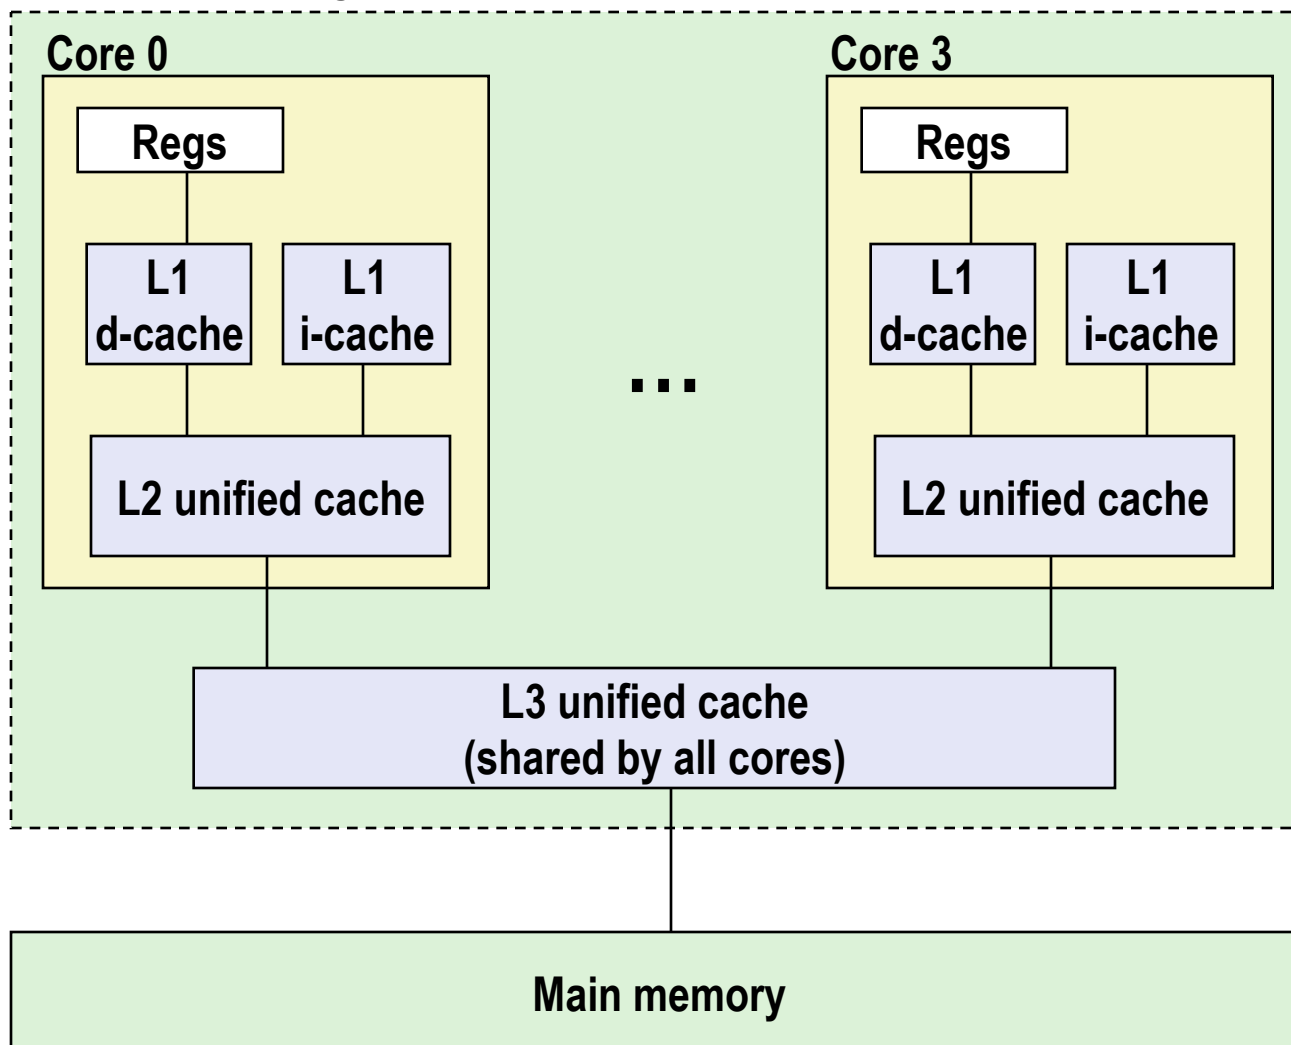

### L1 i-cache and d-cache:

32 KB, 8-way,  
Access: 4 cycles

### L2 unified cache:

256 KB, 8-way,  
Access: 11 cycles

### L3 unified cache:

8 MB, 16-way,  
Access: 30-40 cycles

**Block size:** 64 bytes for  
all caches.

# Cache Performance Metrics

## ■ Miss Rate

- Fraction of memory references not found in cache (misses / accesses)  
=  $1 - \text{hit rate}$
- Typical numbers (in percentages):
  - 3-10% for L1
  - can be quite small (e.g.,  $< 1\%$ ) for L2, depending on size, etc.

## ■ Hit Time

- Time to deliver a line in the cache to the processor
  - includes time to determine whether the line is in the cache
- Typical numbers:
  - 1-2 clock cycle for L1
  - 5-20 clock cycles for L2

## ■ Miss Penalty

- Additional time required because of a miss
  - typically 50-200 cycles for main memory (Trend: increasing!)

# Lets think about those numbers

- **Huge difference between a hit and a miss**
  - Could be 100x, if just L1 and main memory
- **Would you believe 99% hits is twice as good as 97%?**
  - Consider:  
cache hit time of 1 cycle  
miss penalty of 100 cycles
  - Average access time:  
97% hits:  $1 \text{ cycle} + 0.03 * 100 \text{ cycles} = 4 \text{ cycles}$   
99% hits:  $1 \text{ cycle} + 0.01 * 100 \text{ cycles} = 2 \text{ cycles}$
- **This is why “miss rate” is used instead of “hit rate”**

# Writing Cache Friendly Code

- **Make the common case go fast**
  - Focus on the inner loops of the core functions
- **Minimize the misses in the inner loops**
  - Repeated references to variables are good (**temporal locality**)
  - Stride-1 reference patterns are good (**spatial locality**)

**Key idea: Our qualitative notion of locality is quantified through our understanding of cache memories**

# Today

- Cache organization and operation
- **Performance impact of caches**
  - The memory mountain
  - Rearranging loops to improve spatial locality
  - Using blocking to improve temporal locality

# The Memory Mountain

- **Read throughput** (read bandwidth)
  - Number of bytes read from memory per second (MB/s)
- **Memory mountain:** Measured read throughput as a function of spatial and temporal locality.
  - Compact way to characterize memory system performance.



# Memory Mountain Test Function

```
/* The test function */
void test(int elems, int stride) {
    int i, result = 0;
    volatile int sink;

    for (i = 0; i < elems; i += stride)
        result += data[i];
    sink = result; /* So compiler doesn't optimize away the loop */
}

/* Run test(elems, stride) and return read throughput (MB/s) */
double run(int size, int stride, double Mhz)
{
    double cycles;
    int elems = size / sizeof(int);

    test(elems, stride); /* warm up the cache */
    cycles = fcyc2(test, elems, stride, 0); /* call test(elems, stride) */
    return (size / stride) / (cycles / Mhz); /* convert cycles to MB/s */
}
```

# The Memory Mountain



Intel Core i7

32 KB L1 i-cache


32 KB L1 d-cache

256 KB unified L2 cache

8M unified L3 cache

All caches on-chip

# The Memory Mountain

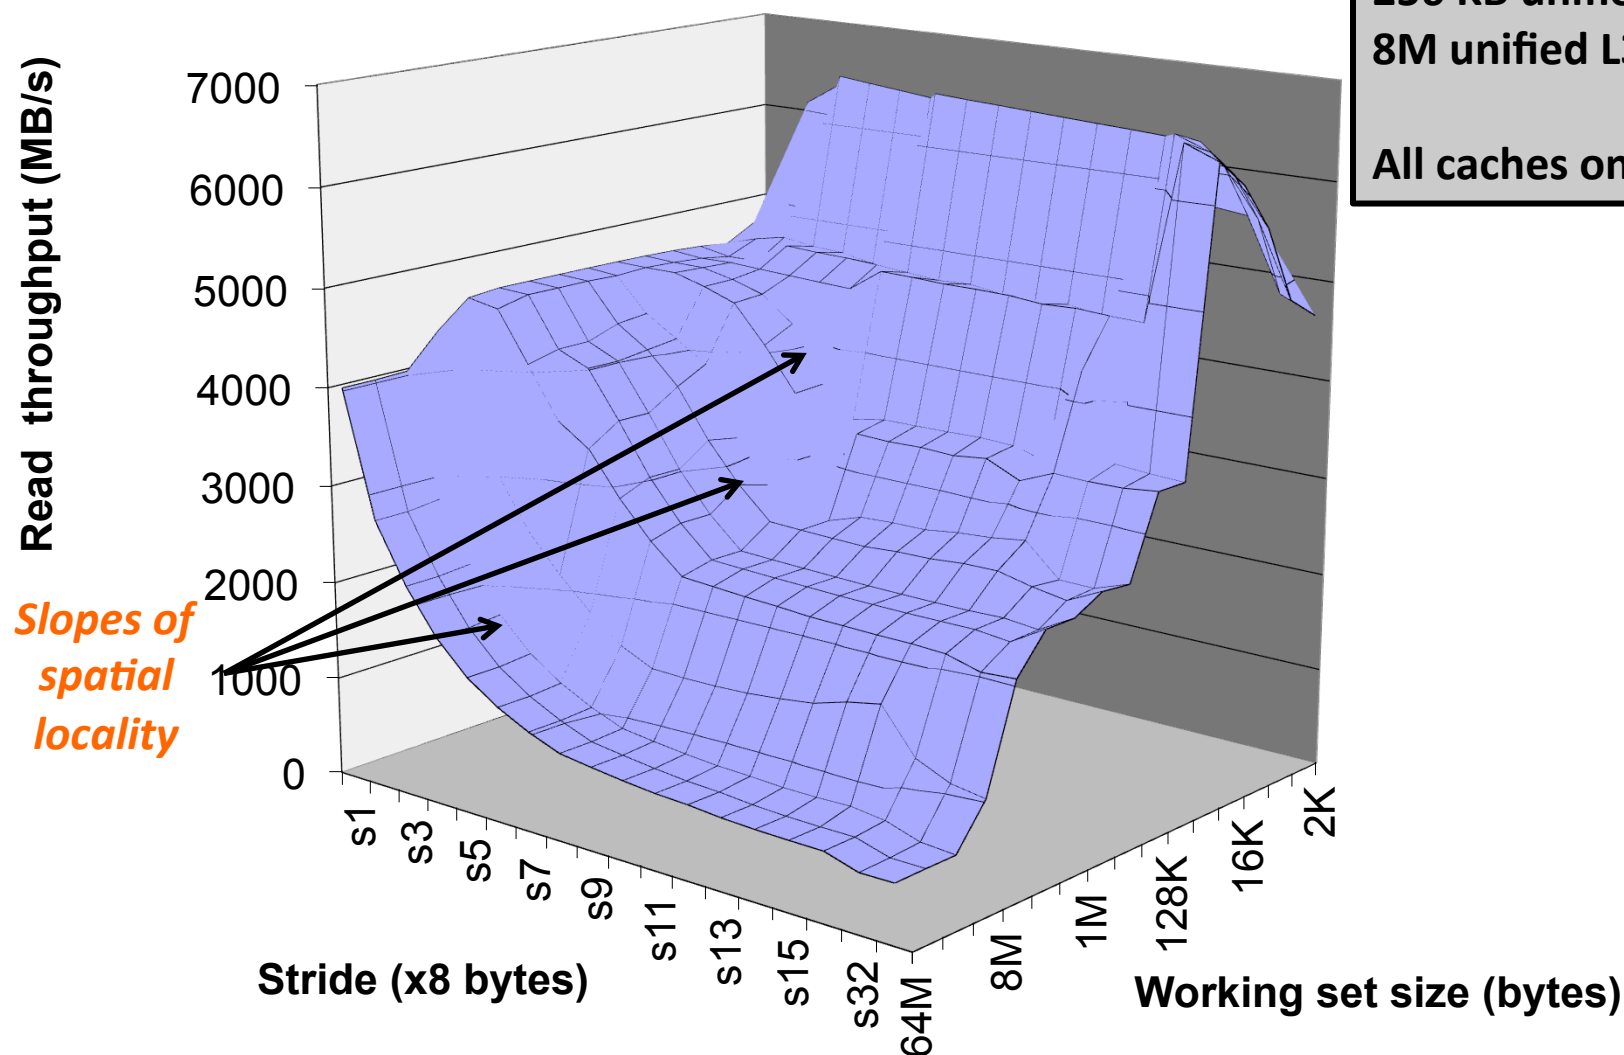

Intel Core i7

32 KB L1 i-cache


32 KB L1 d-cache

256 KB unified L2 cache

8M unified L3 cache

All caches on-chip

# The Memory Mountain

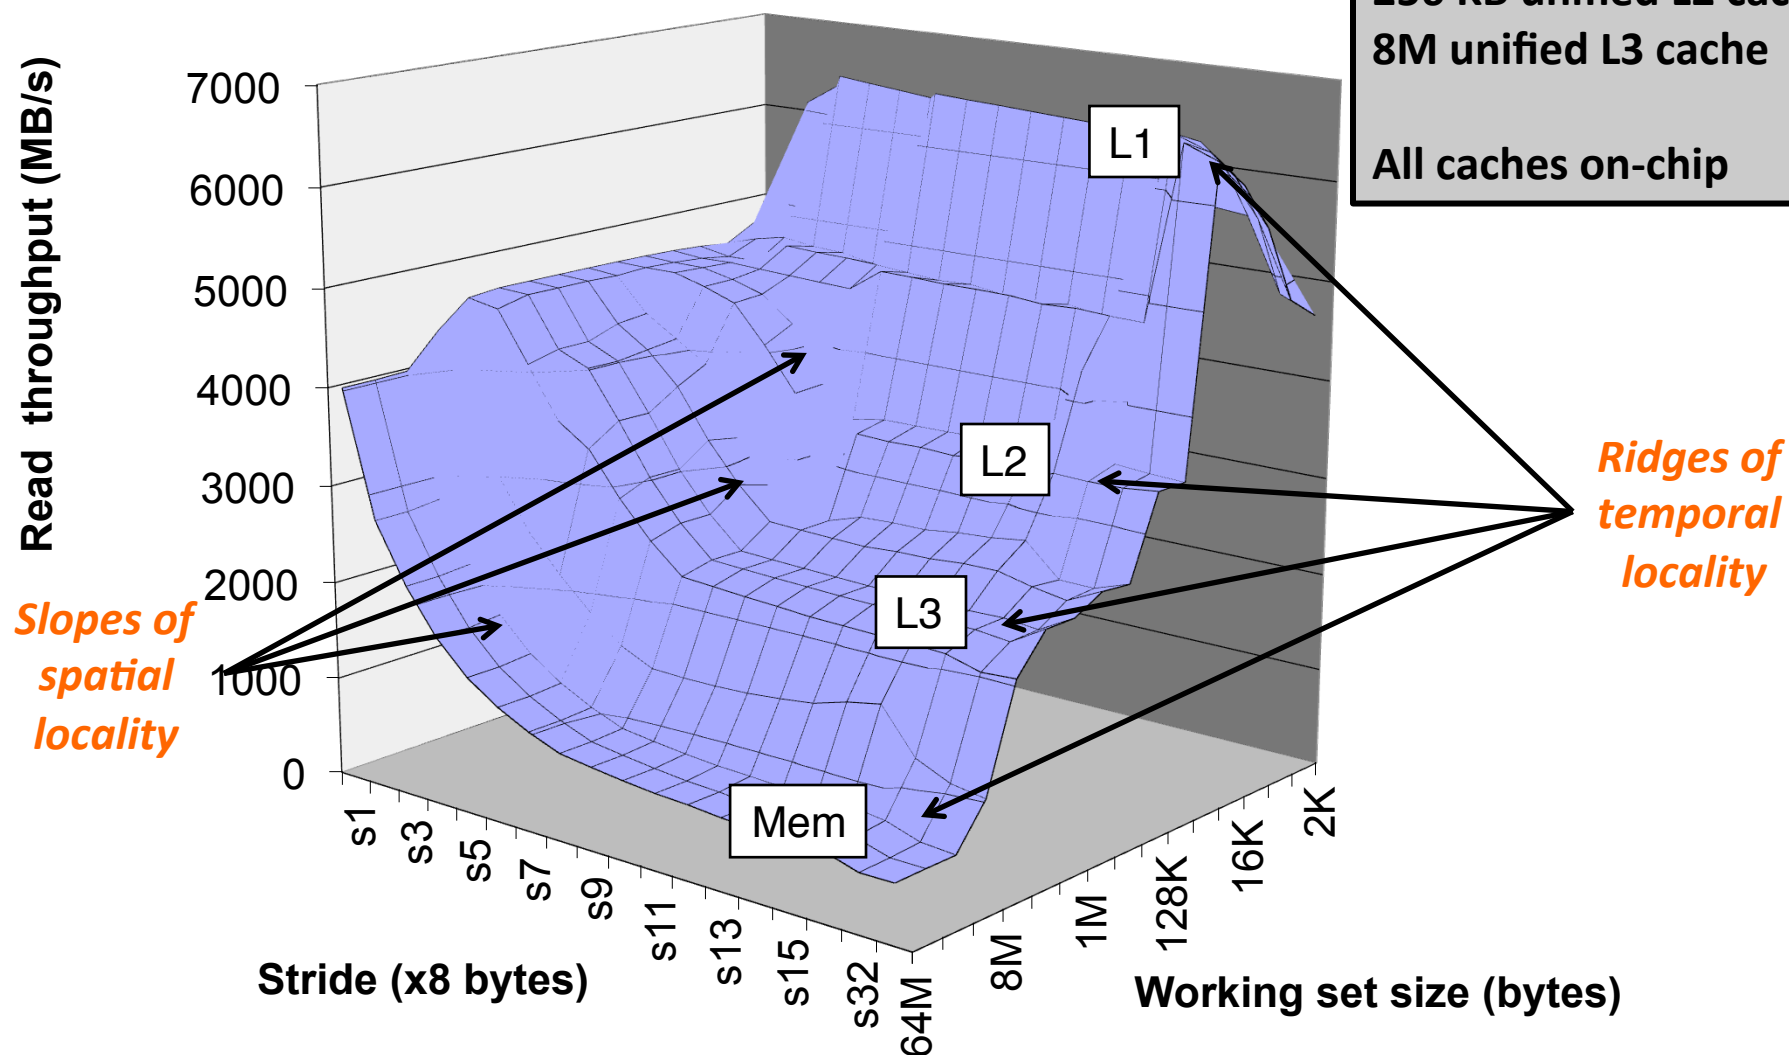

# Today

- Cache organization and operation
- Performance impact of caches
  - The memory mountain
  - Rearranging loops to improve spatial locality
  - Using blocking to improve temporal locality


# Miss Rate Analysis for Matrix Multiply

## ■ Assume:

- Line size = 32B (big enough for four 64-bit words)
- Matrix dimension (N) is very large
  - Approximate  $1/N$  as 0.0
- Cache is not even big enough to hold multiple rows

## ■ Analysis Method:

- Look at access pattern of inner loop

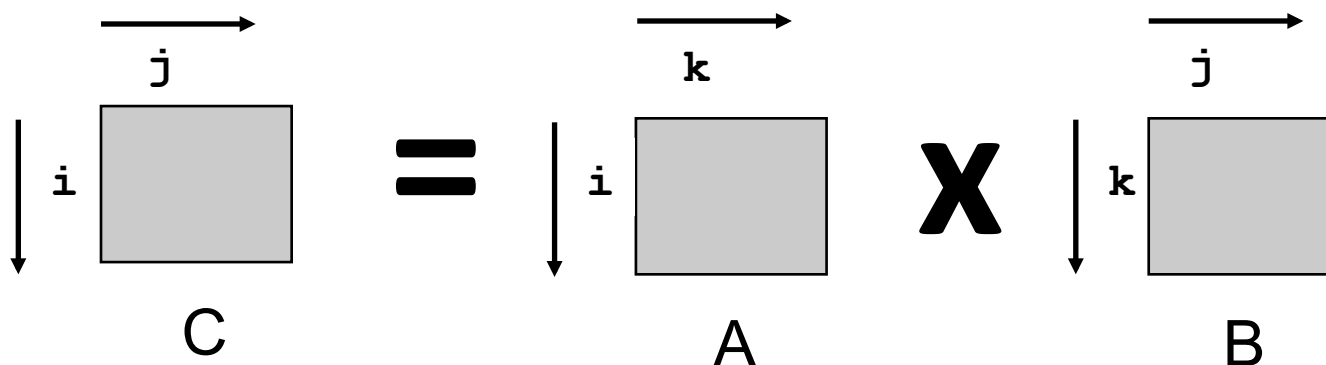

# Matrix Multiplication Example

## ■ Description:

- Multiply  $N \times N$  matrices
- $O(N^3)$  total operations
- $N$  reads per source element
- $N$  values summed per destination
  - but may be able to hold in register

```
/* ijk */
for (i=0; i<n; i++) {
    for (j=0; j<n; j++) {
        sum = 0.0;
        for (k=0; k<n; k++)
            sum += a[i][k] * b[k][j];
        c[i][j] = sum;
    }
}
```

*Variable sum  
held in register*

# Layout of C Arrays in Memory (review)

- **C arrays allocated in row-major order**

- each row in contiguous memory locations

- **Stepping through columns in one row:**

- ```
for (i = 0; i < N; i++)  
    sum += a[0][i];
```
- accesses successive elements
- if block size (B) > 4 bytes, exploit spatial locality
  - miss rate = 4 bytes / B

- **Stepping through rows in one column:**

- ```
for (i = 0; i < n; i++)  
    sum += a[i][0];
```
- accesses distant elements
- no spatial locality!
  - miss rate = 1 (i.e. 100%)




# Matrix Multiplication (ijk)

```

/* ijk */
for (i=0; i<n; i++) {
  for (j=0; j<n; j++) {
    sum = 0.0;
    for (k=0; k<n; k++)
      sum += a[i][k] * b[k][j];
    c[i][j] = sum;
  }
}

```

Inner loop:

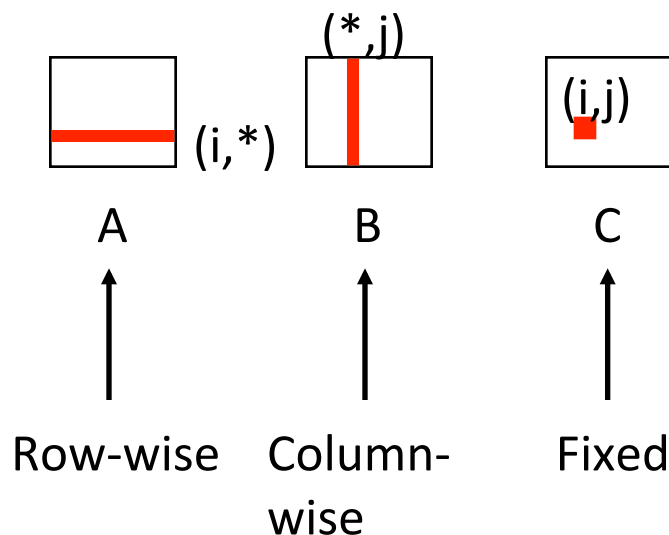

Misses per inner loop iteration:

<u>A</u>	<u>B</u>	<u>C</u>
0.25	1.0	0.0


# Matrix Multiplication (jik)

```

/* jik */
for (j=0; j<n; j++) {
  for (i=0; i<n; i++) {
    sum = 0.0;
    for (k=0; k<n; k++)
      sum += a[i][k] * b[k][j];
    c[i][j] = sum
  }
}

```

Inner loop:

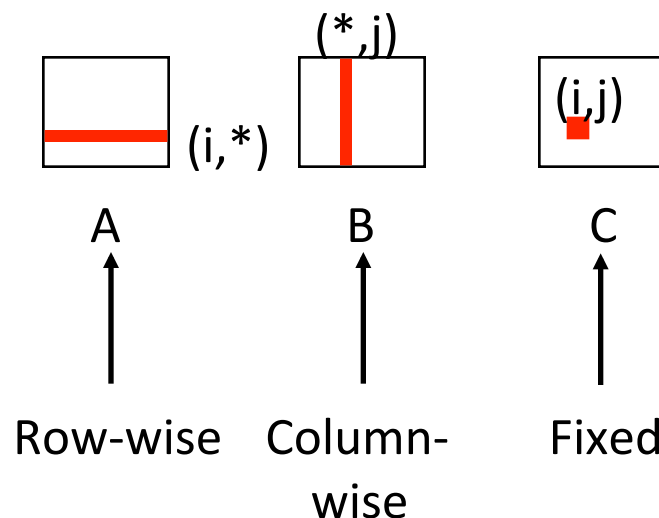

Misses per inner loop iteration:

<u>A</u>	<u>B</u>	<u>C</u>
0.25	1.0	0.0


# Matrix Multiplication (kij)

```

/* kij */
for (k=0; k<n; k++) {
    for (i=0; i<n; i++) {
        r = a[i][k];
        for (j=0; j<n; j++)
            c[i][j] += r * b[k][j];
    }
}

```

Inner loop:

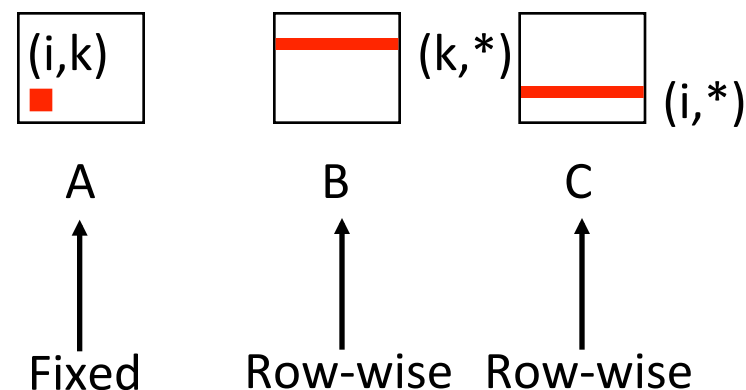

Misses per inner loop iteration:


<u>A</u>	<u>B</u>	<u>C</u>
0.0	0.25	0.25

# Matrix Multiplication (ikj)

```

/* ikj */
for (i=0; i<n; i++) {
    for (k=0; k<n; k++) {
        r = a[i][k];
        for (j=0; j<n; j++)
            c[i][j] += r * b[k][j];
    }
}

```

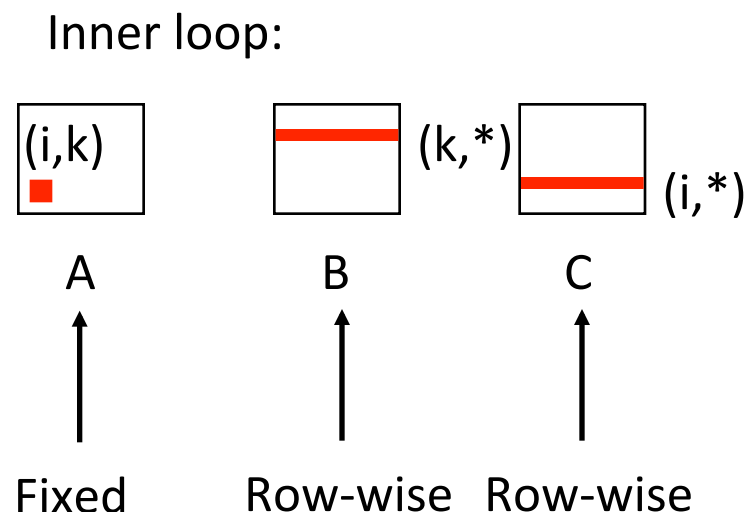

Misses per inner loop iteration:

<u>A</u>	<u>B</u>	<u>C</u>
0.0	0.25	0.25


# Matrix Multiplication (jki)

```

/* jki */
for (j=0; j<n; j++) {
  for (k=0; k<n; k++) {
    r = b[k][j];
    for (i=0; i<n; i++)
      c[i][j] += a[i][k] * r;
  }
}

```

Inner loop:

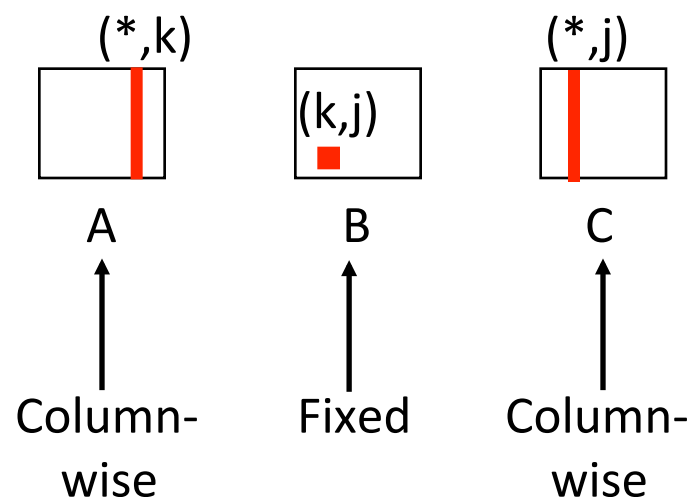

Misses per inner loop iteration:

A  
1.0

B  
0.0

C  
1.0


# Matrix Multiplication (kji)

```

/* kji */
for (k=0; k<n; k++) {
  for (j=0; j<n; j++) {
    r = b[k][j];
    for (i=0; i<n; i++)
      c[i][j] += a[i][k] * r;
  }
}

```

Inner loop:

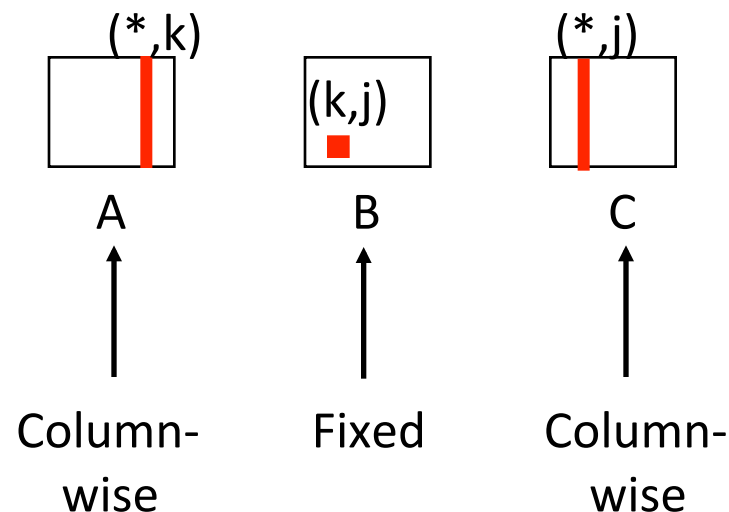

Misses per inner loop iteration:

<u>A</u>	<u>B</u>	<u>C</u>
1.0	0.0	1.0

# Summary of Matrix Multiplication

```
for (i=0; i<n; i++) {  
    for (j=0; j<n; j++) {  
        sum = 0.0;  
        for (k=0; k<n; k++)  
            sum += a[i][k] * b[k][j];  
        c[i][j] = sum;  
    }  
}
```

**ijk (& jik):**

- 2 loads, 0 stores
- misses/iter = **1.25**

```
for (k=0; k<n; k++) {  
    for (i=0; i<n; i++) {  
        r = a[i][k];  
        for (j=0; j<n; j++)  
            c[i][j] += r * b[k][j];  
    }  
}
```

**kij (& ikj):**


- 2 loads, 1 store
- misses/iter = **0.5**

```
for (j=0; j<n; j++) {  
    for (k=0; k<n; k++) {  
        r = b[k][j];  
        for (i=0; i<n; i++)  
            c[i][j] += a[i][k] * r;  
    }  
}
```

**jki (& kji):**

- 2 loads, 1 store
- misses/iter = **2.0**

# Core i7 Matrix Multiply Performance

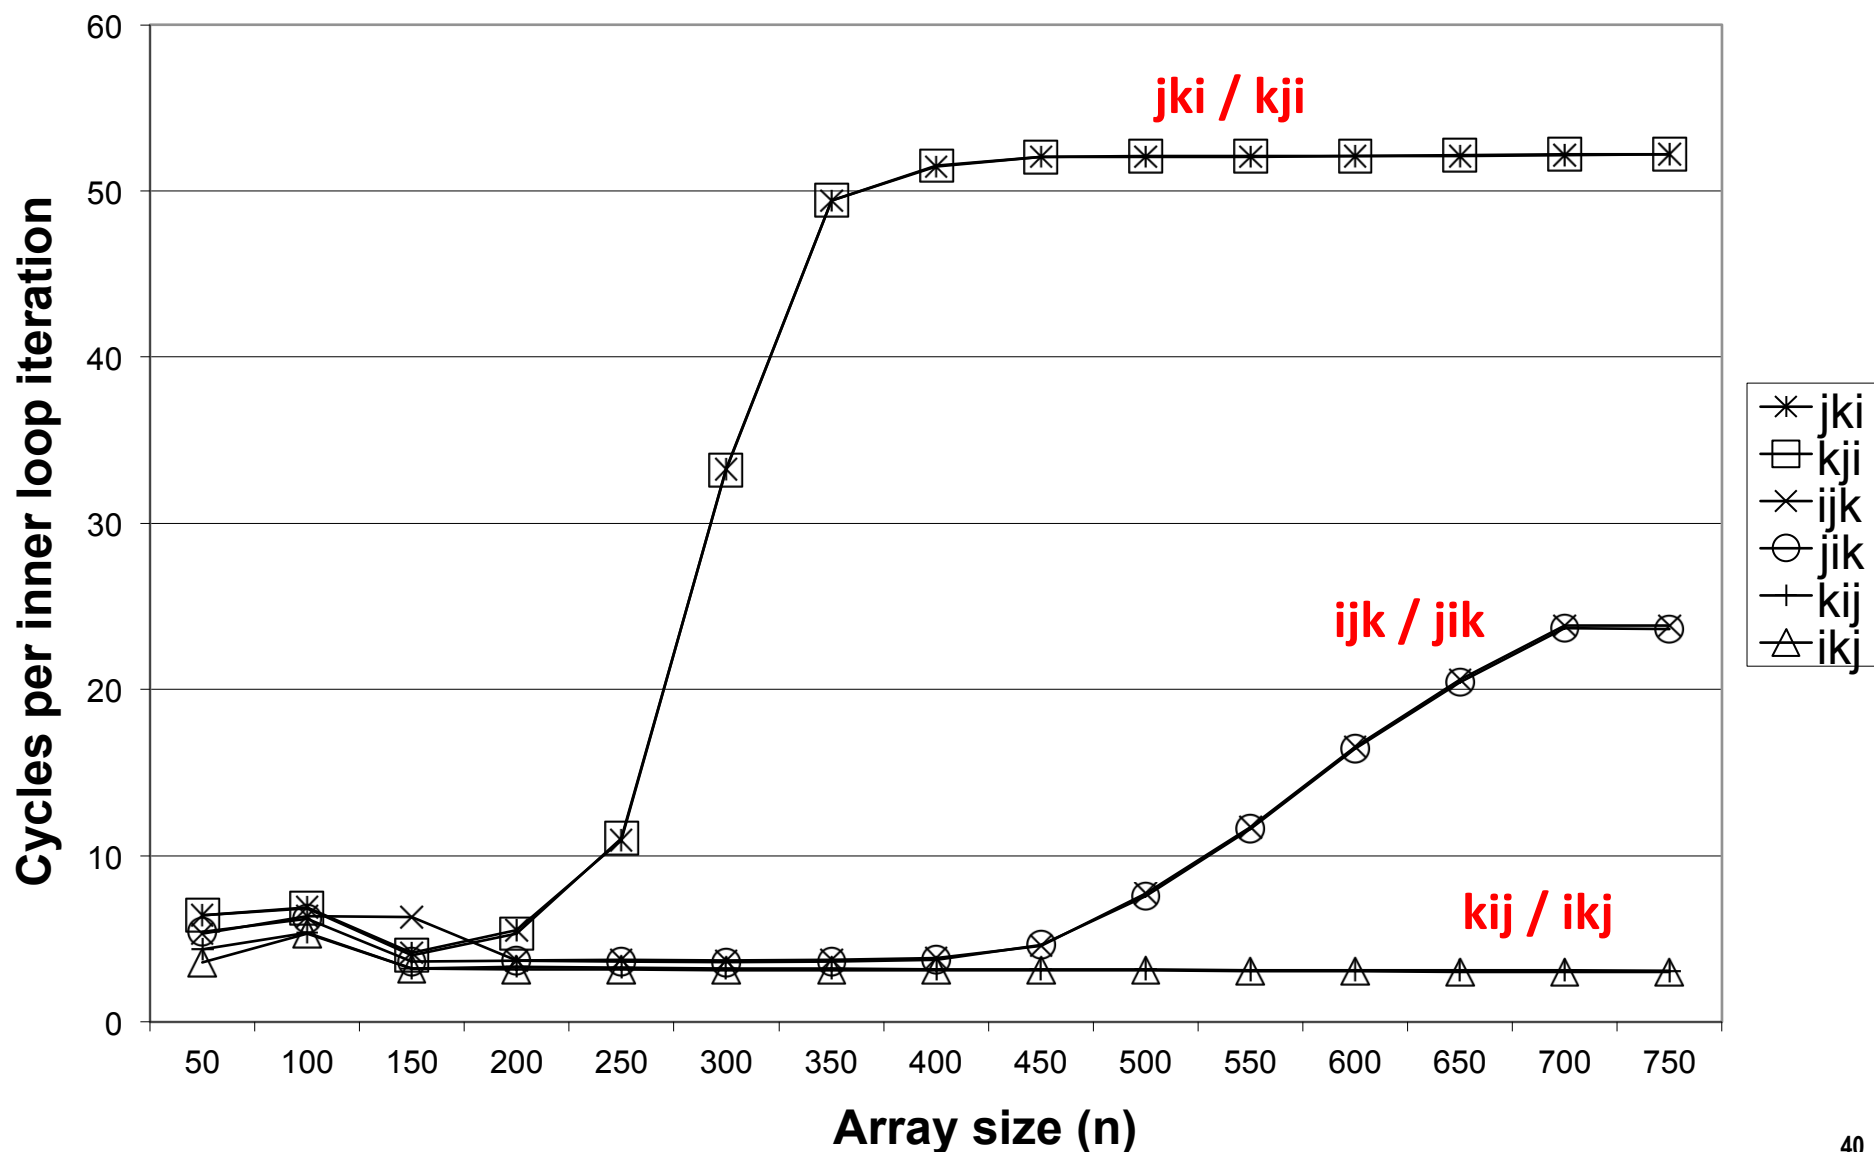




# Today

- Cache organization and operation
- Performance impact of caches
  - The memory mountain
  - Rearranging loops to improve spatial locality
  - Using blocking to improve temporal locality

# Example: Matrix Multiplication

```
c = (double *) calloc(sizeof(double), n*n);  
  
/* Multiply n x n matrices a and b */  
void mmm(double *a, double *b, double *c, int n) {  
    int i, j, k;  
    for (i = 0; i < n; i++)  
        for (j = 0; j < n; j++)  
            for (k = 0; k < n; k++)  
                c[i*n+j] += a[i*n + k]*b[k*n + j];  
}
```

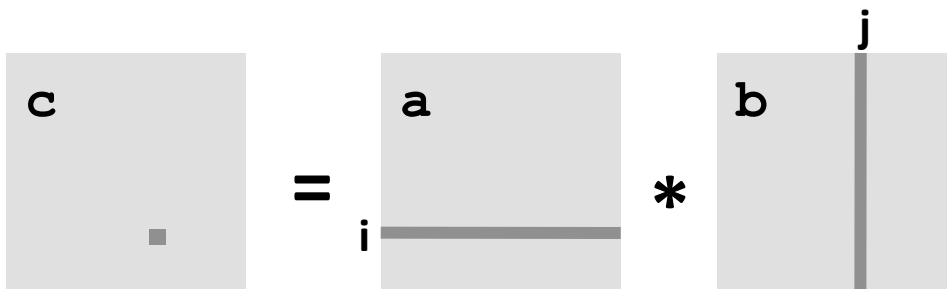

# Cache Miss Analysis


## ■ Assume:

- Matrix elements are doubles
- Cache block = 8 doubles
- Cache size  $C \ll n$  (much smaller than  $n$ )

## ■ First iteration:

- $n/8 + n = 9n/8$  misses

- Afterwards **in cache**:  
(schematic)

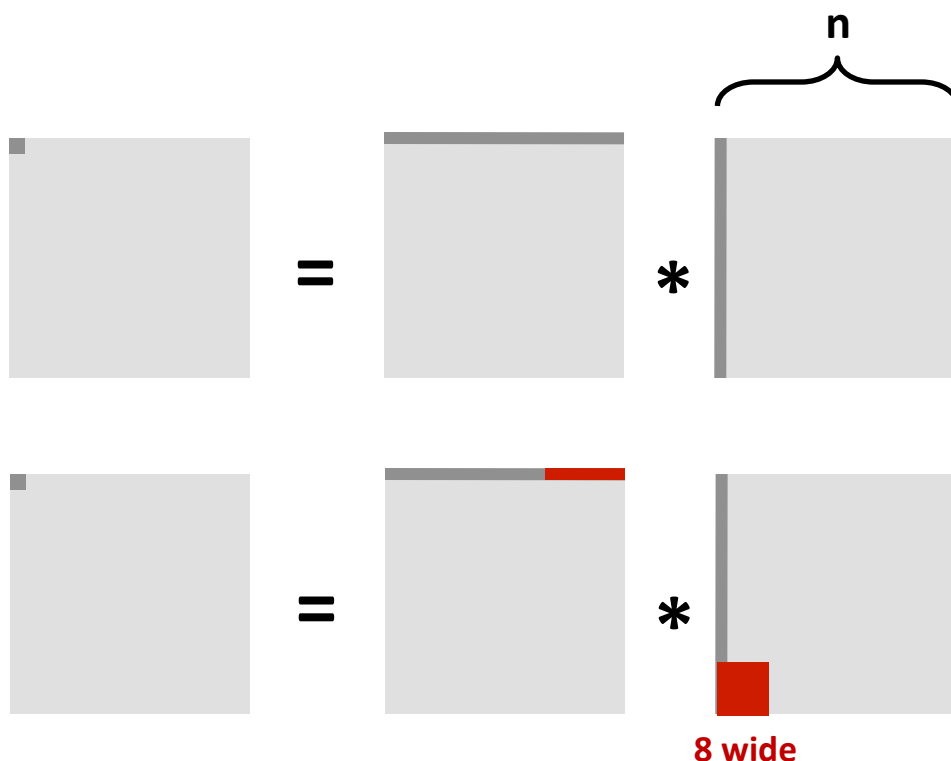


# Cache Miss Analysis

## ■ Assume:

- Matrix elements are doubles
- Cache block = 8 doubles
- Cache size  $C \ll n$  (much smaller than  $n$ )

## ■ Second iteration:

- Again:  
 $n/8 + n = 9n/8$  misses

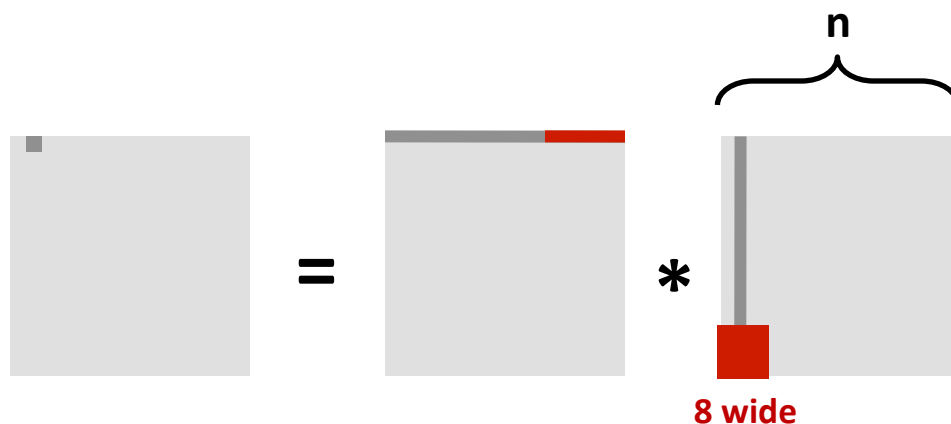

## ■ Total misses:

- $9n/8 * n^2 = (9/8) * n^3$


# Blocked Matrix Multiplication

```

c = (double *) calloc(sizeof(double), n*n);


/* Multiply n x n matrices a and b */
void mmm(double *a, double *b, double *c, int n) {
    int i, j, k;
    for (i = 0; i < n; i+=B)
        for (j = 0; j < n; j+=B)
            for (k = 0; k < n; k+=B)
                /* B x B mini matrix multiplications */
                for (i1 = i; i1 < i+B; i++)
                    for (j1 = j; j1 < j+B; j++)
                        for (k1 = k; k1 < k+B; k++)
                            c[i1*n+j1] += a[i1*n + k1]*b[k1*n + j1];
}

```

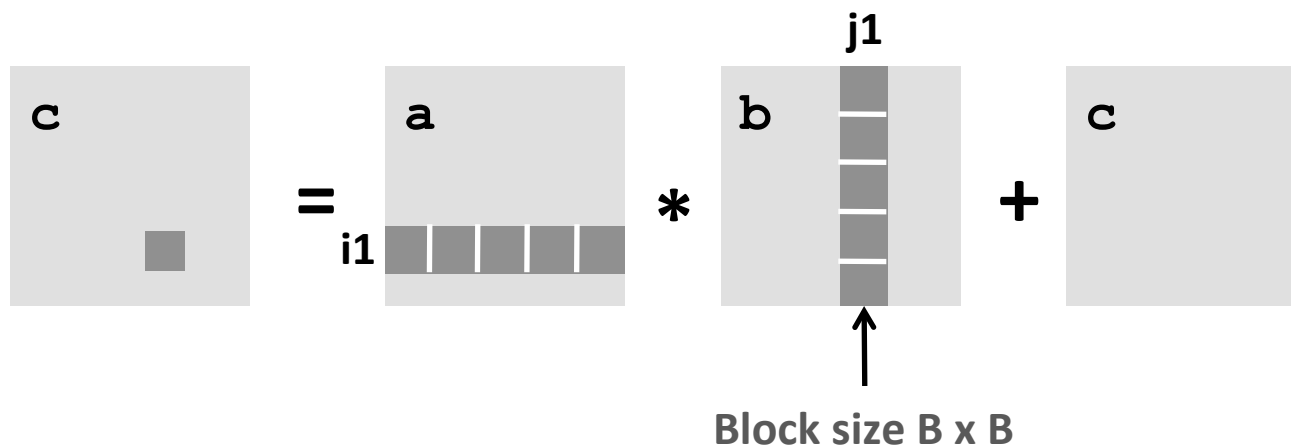


# Cache Miss Analysis

## ■ Assume:

- Cache block = 8 doubles
- Cache size  $C \ll n$  (much smaller than  $n$ )
- Three blocks  fit into cache:  $3B^2 < C$


## ■ First (block) iteration:

- $B^2/8$  misses for each block
- $2n/B * B^2/8 = nB/4$   
(omitting matrix  $c$ )

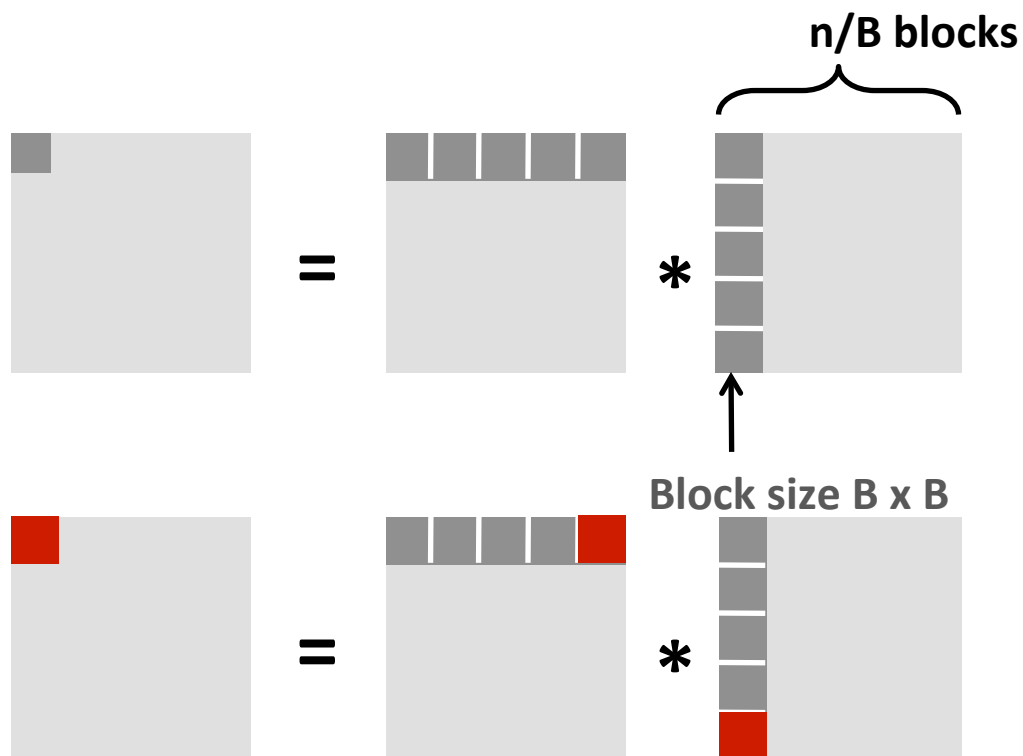


# Cache Miss Analysis

## ■ Assume:

- Cache block = 8 doubles
- Cache size  $C \ll n$  (much smaller than  $n$ )
- Three blocks  fit into cache:  $3B^2 < C$

## ■ Second (block) iteration:

- Same as first iteration
- $2n/B * B^2/8 = nB/4$

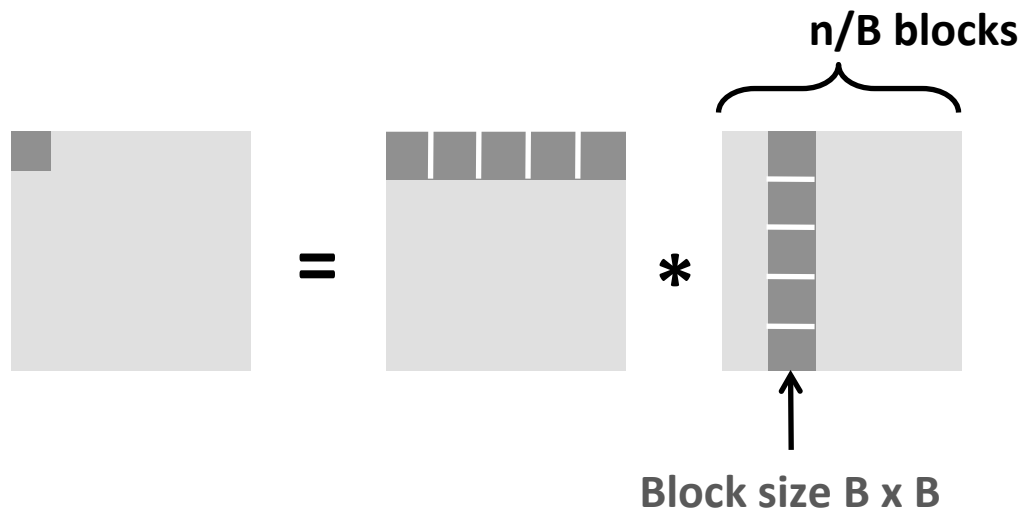

## ■ Total misses:

- $nB/4 * (n/B)^2 = n^3/(4B)$

# Blocking Summary

- No blocking:  $(9/8) * n^3$
- Blocking:  $1/(4B) * n^3$
- Suggest largest possible block size  $B$ , but limit  $3B^2 < C$ !
- Reason for dramatic difference:
  - Matrix multiplication has inherent temporal locality:
    - Input data:  $3n^2$ , computation  $2n^3$
    - Every array elements used  $O(n)$  times!
  - But program has to be written properly



# Cache Summary

- Cache memories can have significant performance impact
- You can write your programs to exploit this!