Lecture 4:

Parallel Programming Basics

Parallel Computer Architecture and Programming CMU 15-418/15-618, Fall 2018

Review: 3 parallel programming models

Shared address space

- Communication is unstructured, implicit in loads and stores
- Natural way of programming, but can shoot yourself in the foot easily
 - Program might be correct, but not perform well

Message passing

- Structure all communication as messages
- Often harder to get first correct program than shared address space
- Structure often helpful in getting to <u>first correct, scalable</u> program

Data parallel


- Structure computation as a big "map" over a collection
- Assumes a shared address space from which to load inputs/store results, but model severely limits communication between iterations of the map (goal: preserve independent processing of iterations)
- Modern embodiments encourage, but don't enforce, this structure

Modern practice: mixed programming models

- Use shared address space programming within a multi-core node of a cluster, use message passing between nodes
 - Very, very common in practice
 - Use convenience of shared address space where it can be implemented efficiently (within a node), require explicit communication elsewhere
- Data-parallel-ish programming models support shared-memory style synchronization primitives in kernels
 - Permit limited forms of inter-iteration communication (e.g., CUDA, OpenCL)
- In a future lecture... CUDA/OpenCL use data-parallel model to scale to many cores, but adopt shared-address space model allowing threads running on the same core to communicate.

Examples of applications to parallelize


Simulating of ocean currents

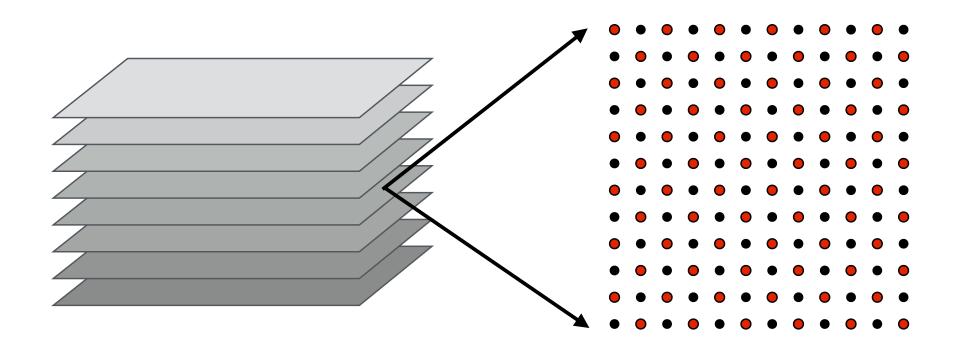

- Discretize 3D ocean volume into slices represented as 2D grids
- **Discretize time evolution of ocean:** Δt
- High accuracy simulation requires small Δt and high resolution grids

Where are the dependencies?


Dependencies in one time step of ocean simulation

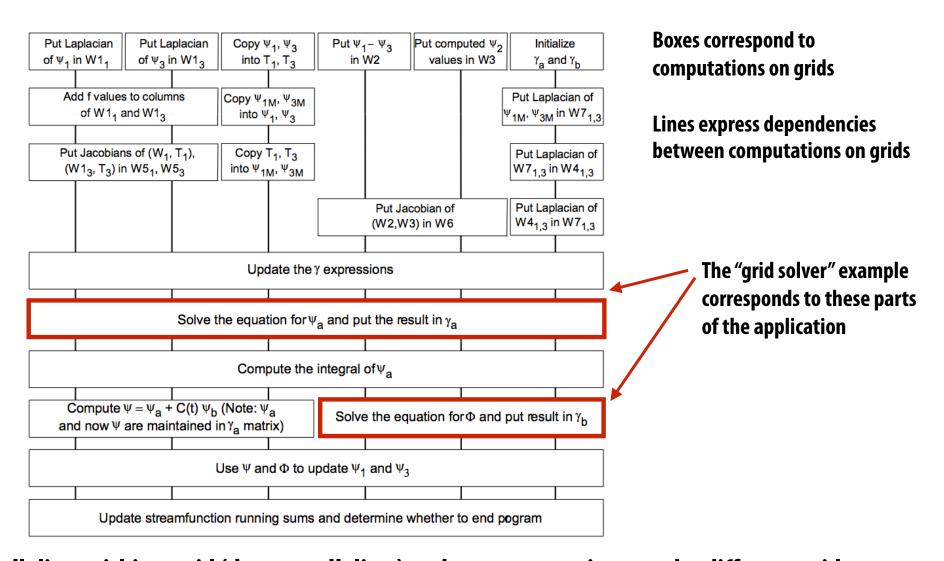

Parallelism within a grid (data-parallelism) and across operations on the different grids. The implementation only leverages data-parallelism (for simplicity)


Galaxy evolution

Barnes-Hut algorithm

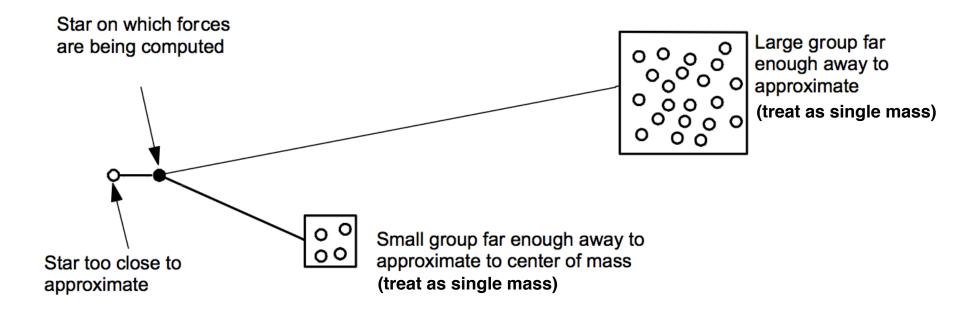

- Represent galaxy as a collection of N particles (think: particle = star)
- Compute forces on each particle due to gravity
 - Naive algorithm is $O(N^2)$ all particles interact with all others (gravity has infinite extent)
 - Magnitude of gravitational force falls off with distance (so algorithms approximate forces from far away stars to gain performance)
 - Result is an O(NIgN) algorithm for computing gravitational forces between all stars

Barnes-Hut tree

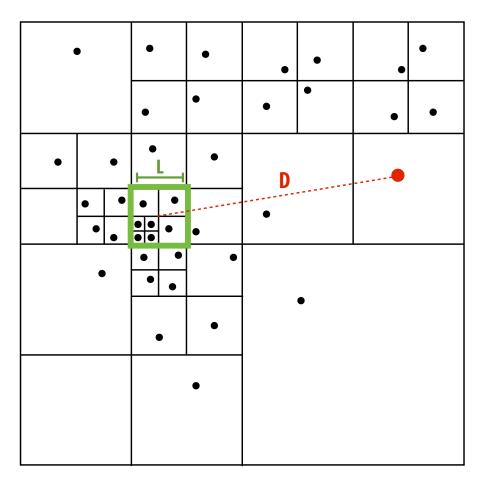

Spatial Domain

Quad-Tree Representation of Bodies

- Leaf nodes are star particles
- Interior nodes store center of mass + aggregate mass of all child bodies
- To compute forces on each body, traverse tree... accumulating forces from all other bodies
 - Compute forces using aggregate interior node if L/D $<\Theta$, else descend to children
- Expected number of nodes touched \sim lg N / Θ^2

Creating a parallel program


Thought process:

- 1. Identify work that can be performed in parallel
- 2. Partition work (and also data associated with the work)
- 3. Manage data access, communication, and synchronization

Recall one of our main goals is speedup * For a fixed computation:

^{*} Other goals include high efficiency (cost, area, power, etc.) or working on bigger problems than can fit on one machine

Creating a parallel program

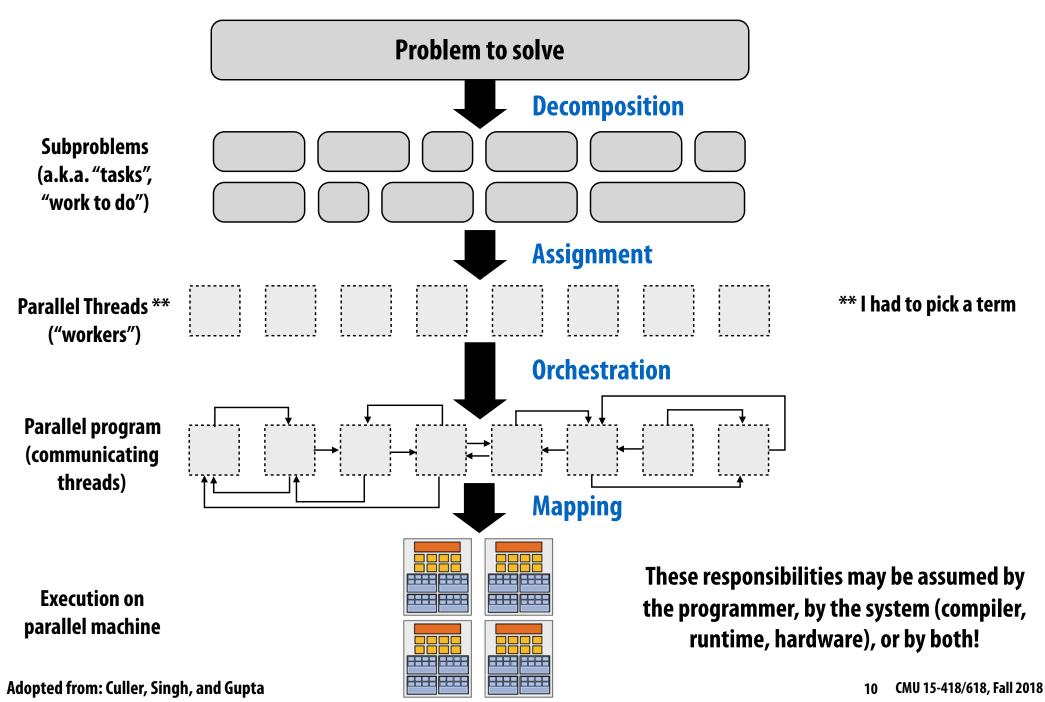

Decomposition

Break up problem into tasks that can be carried out in parallel

- Decomposition need not happen statically
- New tasks can be identified as program executes

Main idea: create at least enough tasks to keep all execution units on a machine busy

Key aspect of decomposition: identifying dependencies (or... a lack of dependencies)

Amdahl's Law: dependencies limit maximum speedup due to parallelism

You run your favorite sequential program...

Let S = the fraction of sequential execution that is inherently sequential (dependencies prevent parallel execution)

Then maximum speedup due to parallel execution $\leq 1/s$


A simple example


Consider a two-step computation on a N x N image

- Step 1: double brightness of all pixels (independent computation on each grid element)
- **Step 2**: compute average of all pixel values

Sequential implementation of program

- Both steps take $\sim N^2$ time, so total time is $\sim 2N^2$

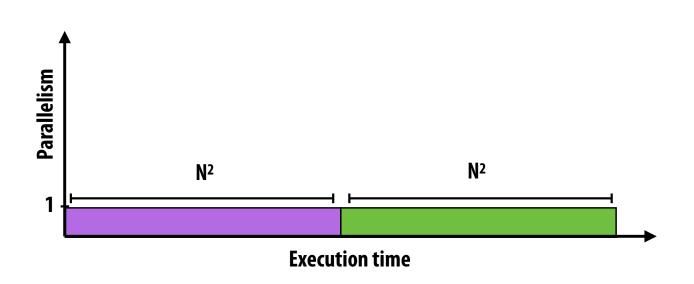



First attempt at parallelism (P processors)


Strategy:


- Step 1: execute in parallel
 - time for phase 1: N²/P
- Step 2: execute serially
 - time for phase 2: N²

Overall performance:

Speedup
$$\leq \frac{2n^2}{\frac{n^2}{p} + n^2}$$

Speedup ≤ 2

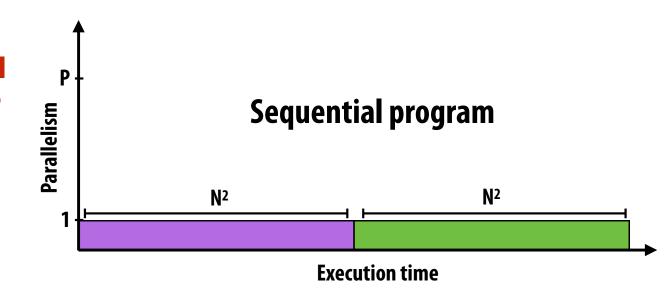

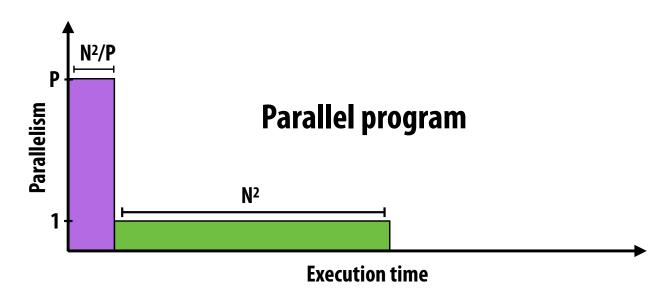

Parallelizing step 2

Strategy:


- Step 1: execute in parallel
 - time for phase 1: N²/P
- Step 2: compute partial sums in parallel, combine results serially
 - time for phase 2: N²/P + P

Overall performance:

- Speedup
$$\leq \frac{2n^2}{\frac{2n^2}{p} + p}$$

Note:


speedup \rightarrow P when N >> P

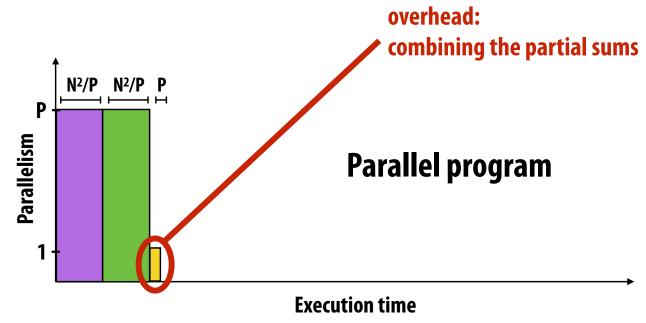

Amdahl's law

Let S = the fraction of total work that is inherently sequential

Max speedup on P processors given by:

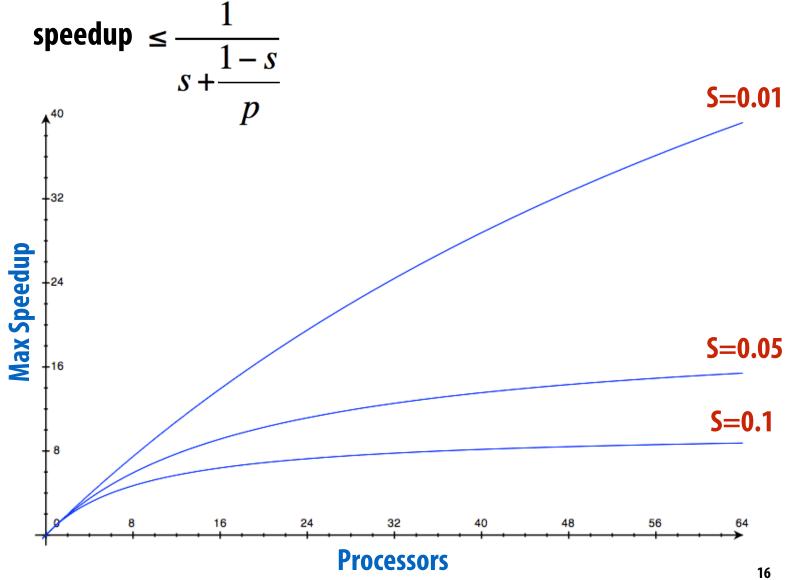

Decomposition


Who is responsible for performing decomposition?

In most cases: the programmer

Automatic decomposition of sequential programs continues to be a challenging research problem (very difficult in general case)

- Compiler must analyze program, identify dependencies
 - What if dependencies are data dependent (not known at compile time)?
- Researchers have had modest success with simple loop nests
- The "magic parallelizing compiler" for complex, general-purpose code has not yet been achieved

Assignment

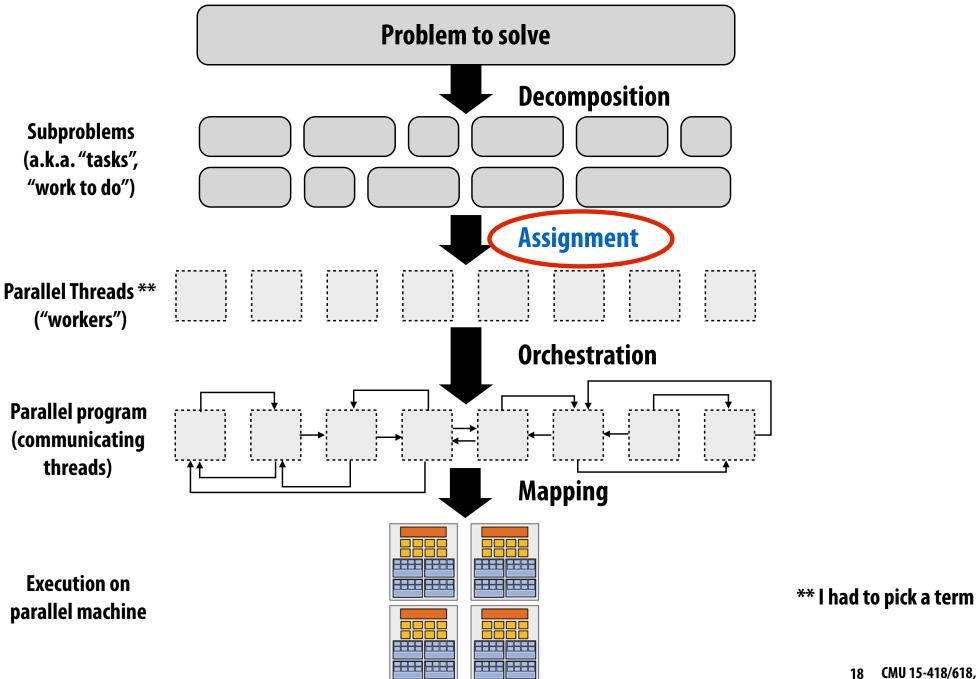

Assignment

Assigning tasks to threads **

** I had to pick a term (will explain in a second)

- Think of "tasks" as things to do
- Think of threads as "workers"

Goals: balance workload, reduce communication costs

Can be performed statically, or dynamically during execution

While programmer often responsible for decomposition, many languages/runtimes take responsibility for assignment.

Assignment examples in ISPC

```
export void sinx(
   uniform int N,
   uniform int terms,
   uniform float* x,
   uniform float* result)
   // assumes N % programCount = 0
   for (uniform int i=0; i<N; i+=programCount)</pre>
      int idx = i + programIndex;
      float value = x[idx];
      float numer = x[idx] * x[idx] * x[idx];
      uniform int denom = 6; // 3!
      uniform int sign = -1;
      for (uniform int j=1; j<=terms; j++)</pre>
         value += sign * numer / denom;
         numer *= x[idx] * x[idx];
         denom *= (2*j+2) * (2*j+3);
         sign *= -1;
      result[i] = value;
```

Decomposition of work by loop iteration

Programmer-managed assignment:

```
Static assignment
Assign iterations to ISPC program instances in interleaved fashion
```

```
export void sinx(
   uniform int N,
   uniform int terms,
   uniform float* x,
   uniform float* result)
  foreach (i = 0 ... N)
      float value = x[i];
      float numer = x[i] * x[i] * x[i];
      uniform int denom = 6; // 3!
      uniform int sign = -1;
      for (uniform int j=1; j<=terms; j++)</pre>
         value += sign * numer / denom;
         numer *= x[i] * x[i];
         denom *= (2*j+2) * (2*j+3);
         sign *= -1;
      result[i] = value;
```

Decomposition of work by loop iteration

System-manages assignment of iterations (work) to ISPC program instances (abstraction leaves room for dynamic assignment, but current ISPC implementation is static)

Static assignment example using pthreads

```
typedef struct {
   int N, terms;
  float* x, *result;
} my_args;
void parallel sinx(int N, int terms, float* x, float* result)
    pthread_t thread id;
    my_args args;
    args.N = N/2;
    args.terms = terms;
    args.x = x;
    args.result = result;
   // launch second thread, do work on first half of array
    pthread create(&thread id, NULL, my thread start, &args);
    // do work on second half of array in main thread
    sinx(N - args.N, terms, x + args.N, result + args.N);
    pthread join(thread id, NULL);
void my_thread_start(void* thread_arg)
   my args* thread args = (my args*)thread arg;
   sinx(args->N, args->terms, args->x, args->result); // do work
```

Decomposition of work by loop iteration

Programmer-managed assignment:

half to main thread)


Static assignment
Assign iterations to pthreads in blocked fashion
(first half of array to spawned thread, second

Dynamic assignment using ISPC tasks

ISPC runtime assign tasks to worker threads



Assignment policy: after completing current task, worker thread inspects list and assigns itself the next uncompleted task.




Orchestration

Subproblems (a.k.a. "tasks", "work to do")

Parallel Threads **
("workers")

Parallel program (communicating threads)

Execution on parallel machine

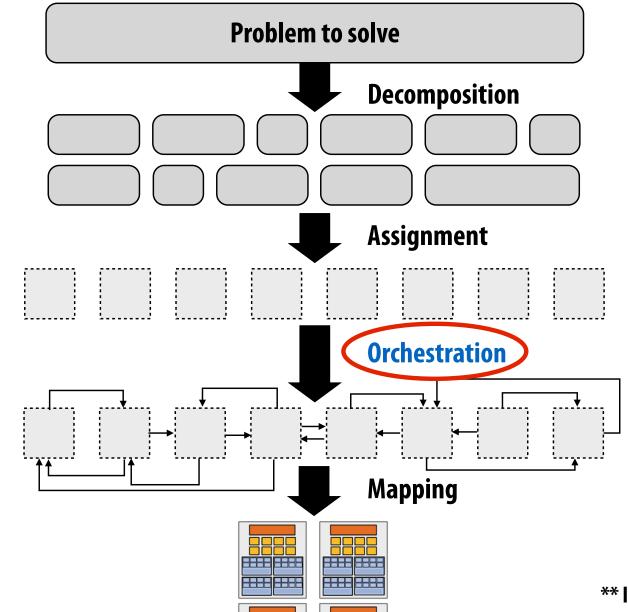

** I had to pick a term

Orchestration

Involves:

- Structuring communication
- Adding synchronization to preserve dependencies if necessary
- Organizing data structures in memory
- Scheduling tasks

<u>Goals</u>: reduce <u>costs of communication/sync</u>, preserve <u>locality of data reference</u>, reduce <u>overhead</u>, etc.

Machine details impact many of these decisions

- If synchronization is expensive, might use it more sparsely


Mapping to hardware

Subproblems (a.k.a. "tasks", "work to do")

Parallel Threads **
("workers")

Parallel program (communicating threads)

Execution on parallel machine

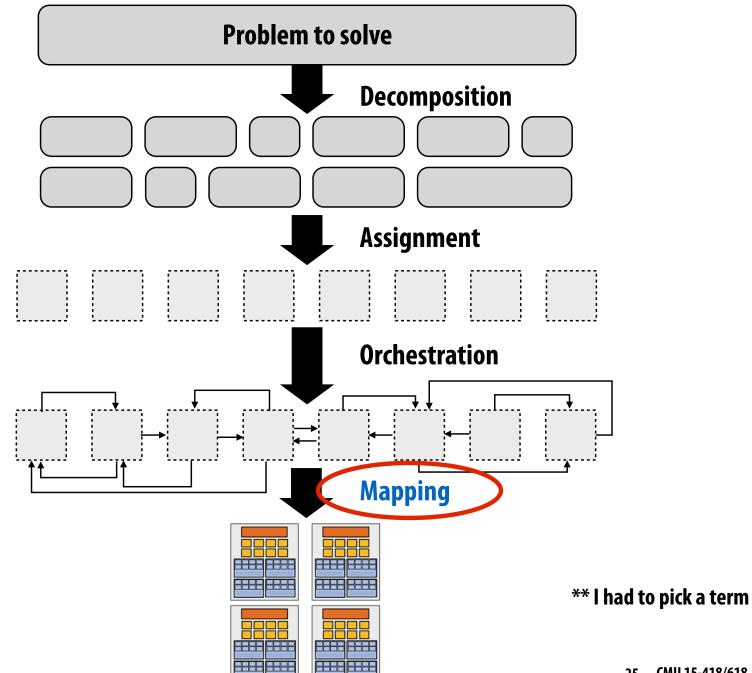

Mapping to hardware

Mapping "threads" ("workers") to hardware execution units

Example 1: mapping by the operating system

- e.g., map pthread to HW execution context on a CPU core

Example 2: mapping by the compiler

- Map ISPC program instances to vector instruction lanes


Example 3: mapping by the hardware

Map CUDA thread blocks to GPU cores (future lecture)

Some interesting mapping decisions:

- Place <u>related</u> threads (cooperating threads) on the same processor (maximize locality, data sharing, minimize costs of comm/sync)
- Place <u>unrelated</u> threads on the same processor (one might be bandwidth limited and another might be compute limited) to use machine more efficiently

Decomposing computation or data?



Often, the reason a problem requires lots of computation (and needs to be parallelized) is that it involves manipulating a lot of data.

I've described the process of parallelizing programs as an act of partitioning <u>computation</u>.

Often, it's equally valid to think of <u>partitioning data</u>. (computations go with the data)

But there are many computations where the correspondence between work-to-do ("tasks") and data is less clear. In these cases it's natural to think of partitioning computation.

27 CMU 15-418/618, Fall 2018


A parallel programming example

A 2D-grid based solver

Solve partial differential equation (PDE) on $(N+2) \times (N+2)$ grid

Iterative solution

Perform Gauss-Seidel sweeps over grid until convergence

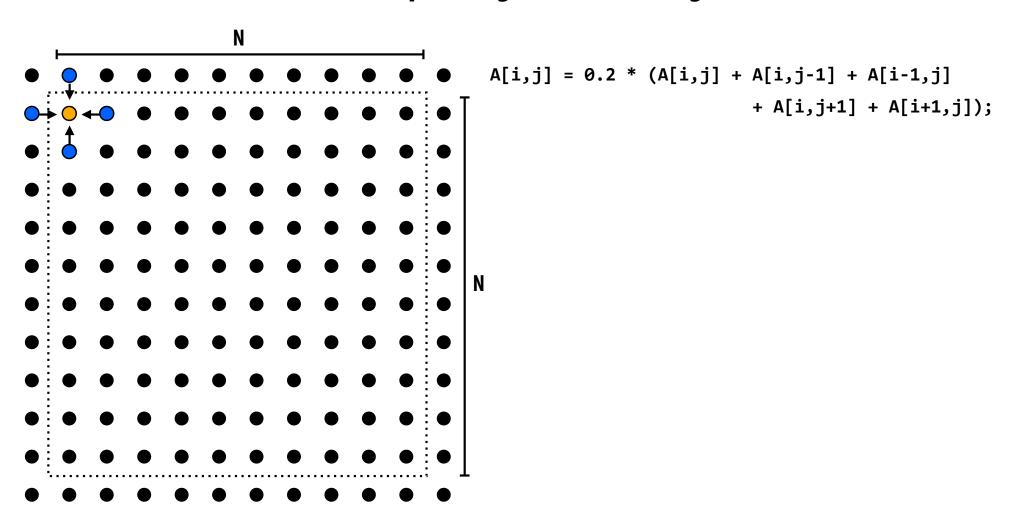


Grid solver algorithm

C-like pseudocode for sequential algorithm is provided below

```
const int n;
float* A;
                            // assume allocated to grid of N+2 x N+2 elements
void solve(float* A) {
 float diff, prev;
 bool done = false;
 while (!done) {
                                       // outermost loop: iterations
   diff = 0.f:
   for (int i=1; i<n i++) {
                                      // iterate over non-border points of grid
     for (int j=1; j<n; j++) {
       prev = A[i,j];
       A[i,j] = 0.2f * (A[i,j] + A[i,j-1] + A[i-1,j] +
                                 A[i,j+1] + A[i+1,j]);
       diff += fabs(A[i,j] - prev); // compute amount of change
   if (diff/(n*n) < TOLERANCE) // quit if converged
     done = true;
```


Step 1: identify dependencies (problem decomposition phase)

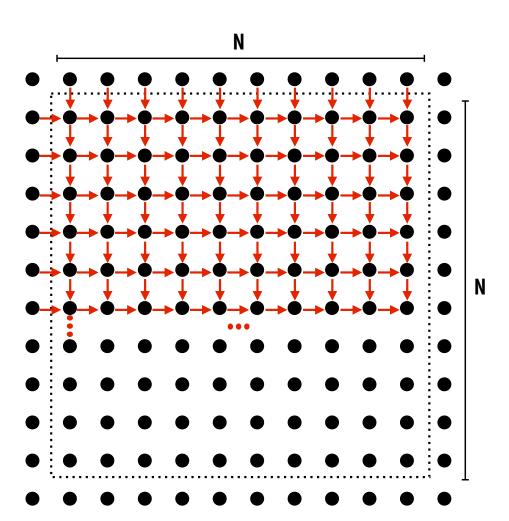

Each row element depends on element to left.

Each column depends on previous column.

Step 1: identify dependencies (problem decomposition phase)

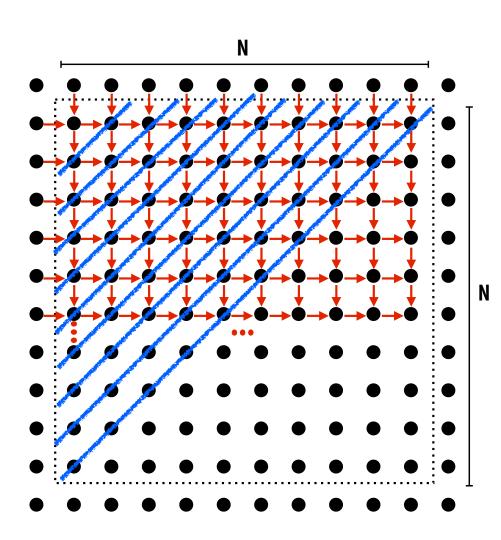

There is independent work along the diagonals!

Good: parallelism exists!

Possible implementation strategy:

- 1. Partition grid cells on a diagonal into tasks
- 2. Update values in parallel
- 3. When complete, move to next diagonal

Bad: independent work is hard to exploit

Not much parallelism at beginning and end of
computation.


Frequent synchronization (after completing each diagonal)

Let's make life easier on ourselves

Idea: improve performance by changing the algorithm to one that is more amenable to parallelism

- Change the order grid cell cells are updated
- New algorithm iterates to same solution (approximately),
 but converges to solution differently
 - Note: floating-point values computed are different, but solution still converges to within error threshold
- Yes, we needed domain knowledge of Gauss-Seidel method for solving a linear system to realize this change is permissible for the application

New approach: reorder grid cell update via red-black coloring

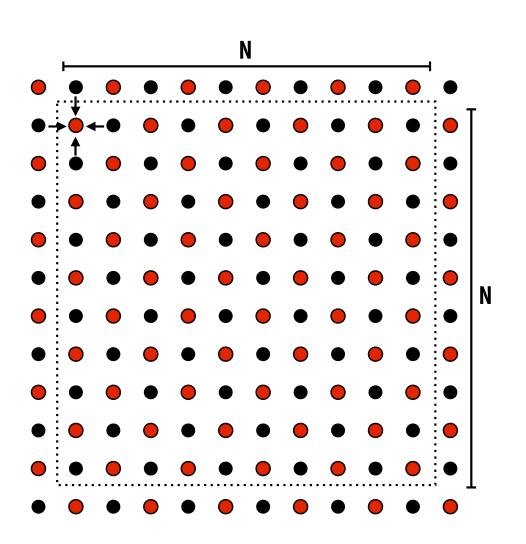


Update all red cells in parallel

When done updating red cells , update all black cells in parallel (respect dependency on red cells)

Repeat until convergence

Possible assignments of work to processors

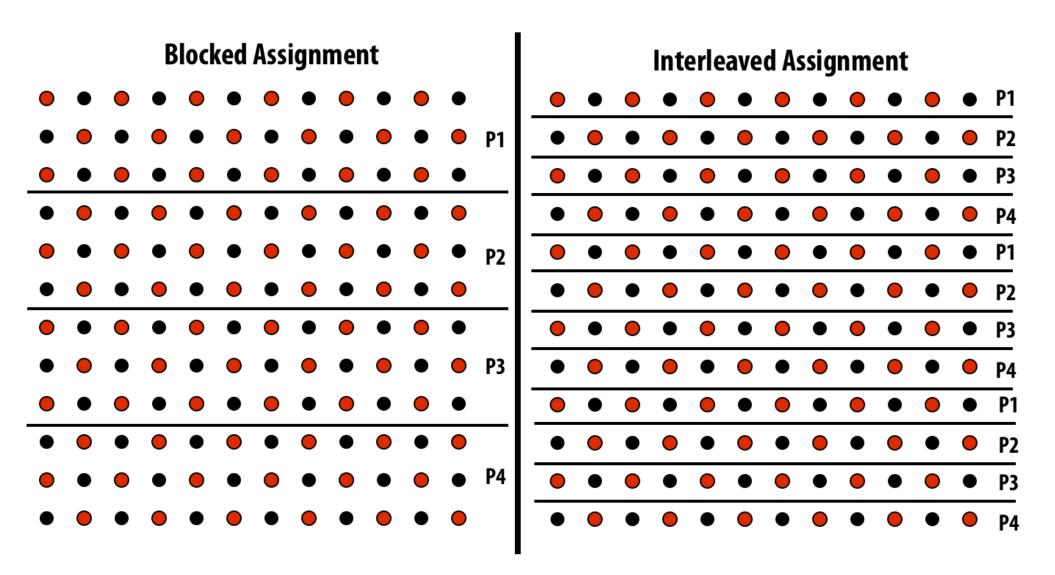


Question: Which is better? Does it matter?


Answer: it depends on the system this program is running on

Consider dependencies (data flow)

- 1. Perform red update in parallel
- 2. Wait until all processors done with update
- 3. Communicate updated red cells to other processors
- 4. Perform black update in parallel
- 5. Wait until all processors done with update
- 6. Communicate updated black cells to other processors
- 7. Repeat

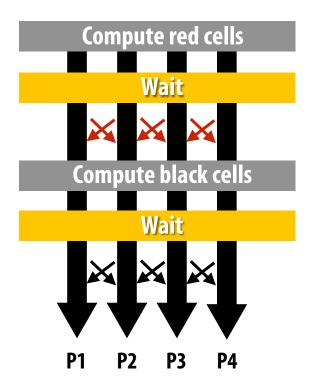

Communication resulting from assignment

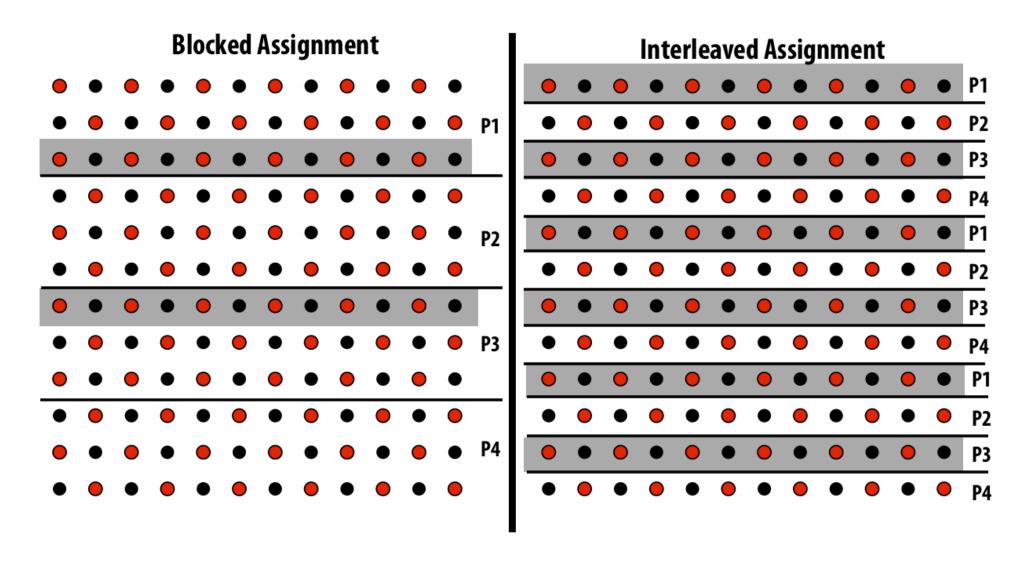

= data that must be sent to P2 each iteration

Blocked assignment requires less data to be communicated between processors

Data-parallel expression of solver

Data-parallel expression of grid solver

Note: to simplify pseudocode: just showing red-cell update


```
const int n;
                                                                                  Assignment: ???
float* A = allocate(n+2, n+2)); // allocate grid
void solve(float* A) {
   bool done = false;
   float diff = 0.f;
   while (!done) {
     for all (red cells (i,j)) {
                                                                                  decomposition:
          +loat prev = A[1,7];
                                                                                  individual grid
          A[i,j] = 0.2f * (A[i-1,j] + A[i,j-1] + A[i,j] +
                                                                                  elements constitute
                               A[i+1,j] + A[i,j+1]);
                                                                                  independent work
          reduceAdd(diff, abs(A[i,j] - prev));
                                                                Orchestration: handled by system
                                                                (builtin communication primitive: reduceAdd)
      if (diff/(n*n) < TOLERANCE)</pre>
          done = true;
                                                                       Orchestration:
                                                                       handled by system
                                                                       (End of for all block is implicit wait for all
                                                                       workers before returning to sequential control)
```

Shared address space (with SPMD threads) expression of solver

Shared address space expression of solver

SPMD execution model

- Programmer is responsible for synchronization
- **■** Common synchronization primitives:
 - Locks (provide mutual exclusion): only one thread in the critical region at a time
 - Barriers: wait for threads to reach this point

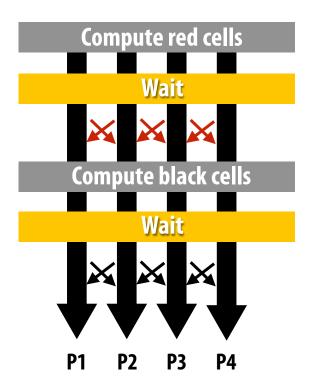

Shared address space solver (pseudocode in SPMD execution model)

```
Assume these are global variables
                               // grid size
                                                                                        (accessible to all threads)
int
         n;
        done = false:
bool
                                                                                        Assume solve function is executed by
        diff = 0.0;
float
         myLock;
                                                                                        all threads. (SPMD-style)
LOCK
BARRIER myBarrier;
// allocate grid
float* A = allocate(n+2, n+2);
                                                                                        Value of threadId is different for
void solve(float* A) {
                                                                                        each SPMD instance: use value to
                                                                                        compute region of grid to work on
   int threadId = getThreadId();
   int myMin = 1 + (threadId * n / NUM PROCESSORS);
   int myMax = myMin + (n / NUM PROCESSORS)
   while (!done) {
     diff = 0.f;
                                                                                        Each thread computes the rows it is
     barrier(myBarrier, NUM PROCESSORS);
                                                                                        responsible for updating
     for (j=myMin to myMax) {
         for (i = red cells in this row) {
            float prev = A[i,j];
            A[i,j] = 0.2f * (A[i-1,j] + A[i,j-1] + A[i,j] +
                               A[i+1,j], A[i,j+1]);
            lock(myLock)
            diff += abs(A[i,j] - prev));
            unlock(myLock);
     barrier(myBarrier, NUM PROCESSORS);
     if (diff/(n*n) < TOLERANCE)</pre>
                                                 // check convergence, all threads get same answer
          done = true;
     barrier(myBarrier, NUM PROCESSORS);
```

Review: need for mutual exclusion

Each thread executes

- Load the value of diff into register r1
- Add the register r2 to register r1
- Store the value of register r1 into diff

One possible interleaving: (let starting value of diff=0, r2=1)

T0	T1	
r1 ← diff		T0 reads value 0
	r1 ← diff	T1 reads value 0
r1 ← r1 + r2		T0 sets value of its r1 to 1
11 \ 11 12	r1 ← r1 + r2	T1 sets value of its r1 to 1
11.66		T0 stores 1 to diff
diff ← r1	diff ← r1	T1 stores 1 to diff
	latii , it	

Need this set of three instructions to be atomic

Mechanisms for preserving atomicity

Lock/unlock mutex around a critical section

```
LOCK(mylock);
// critical section
UNLOCK(mylock);
```

■ Some languages have first-class support for atomicity of code blocks

```
atomic {
  // critical section
}
```

Intrinsics for hardware-supported atomic read-modify-write operations

```
atomicAdd(x, 10);
```

Shared address space solver (pseudocode in SPMD

execution model)

```
int
                             // grid size
        n;
       done = false;
bool
       diff = 0.0;
float
LOCK
       myLock;
BARRIER myBarrier;
                                                     Do you see a potential performance
// allocate grid
float* A = allocate(n+2, n+2);
                                                     problem with this implementation?
void solve(float* A) {
   int threadId = getThreadId();
   int myMin = 1 + (threadId * n / NUM PROCESSORS);
   int myMax = myMin + (n / NUM PROCESSORS)
   while (!done) {
     diff = 0.f;
     barrier(myBarrier, NUM_PROCESSORS);
     for (j=myMin to myMax) {
        for (i = red cells in this row) {
           float prev = A[i,j];
           A[i,j] = 0.2f * (A[i-1,j] + A[i,j-1] + A[i,j] +
                            A[i+1,j], A[i,j+1]);
           lock(myLock)
           diff += abs(A[i,j] - prev));
           unlock(myLock);
     barrier(myBarrier, NUM PROCESSORS);
     if (diff/(n*n) < TOLERANCE)</pre>
                                          // check convergence, all threads get same answer
         done = true;
     barrier(myBarrier, NUM PROCESSORS);
```

Shared address space solver (SPMD execution model)

```
// grid size
int
        n;
       done = false;
bool
       diff = 0.0;
float
                                                      Improve performance by accumulating
LOCK
        myLock;
BARRIER myBarrier;
                                                      into partial sum locally, then complete
// allocate grid
float* A = allocate(n+2, n+2);
                                                      reduction globally at the end of the
void solve(float* A) {
                                                      iteration.
   float myDiff;
   int threadId = getThreadId();
   int myMin = 1 + (threadId * n / NUM PROCESSORS);
   int myMax = myMin + (n / NUM PROCESSORS)
   while (!done) {
     float myDiff = 0.f;
     diff = 0.f;
     barrier(myBarrier, NUM_PROCESSORS);
     for (j=myMin to myMax) {
        for (i = red cells in this row) {
           float prev = A[i,j];
           A[i,j] = 0.2f * (A[i-1,j] + A[i,j-1] + A[i,j] +
                                                                                 compute per worker partial sum
                            A[i+1,j], A[i,j+1]);
           myDiff += abs(A[i,i] - prev));
                                                               Now only only lock once per thread, not once
    lock(myLock);
                                                               per (i,j) loop iteration!
     diff += myDiff;
    unlock(myLock);
     barrier(myBarrier, NUM PROCESSORS);
     if (diff/(n*n) < TOLERANCE)</pre>
                                            // check convergence, all threads get same answer
         done = true;
     barrier(myBarrier, NUM PROCESSORS);
```


Barrier synchronization primitive

barrier(num_threads)

Barriers are a conservative way to express dependencies

Barriers divide computation into phases

All computations by all threads before the barrier complete before any computation in any thread after the barrier begins

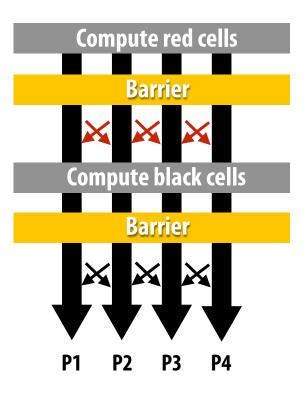

Shared address space solver (SPMD execution model)

```
// grid size
int
        n;
bool
        done = false;
float diff = 0.0;
                                                          Why are there three barriers?
        myLock;
LOCK
BARRIER myBarrier;
// allocate grid
float* A = allocate(n+2, n+2);
void solve(float* A) {
   float myDiff;
   int threadId = getThreadId();
   int myMin = 1 + (threadId * n / NUM PROCESSORS);
   int myMax = myMin + (n / NUM PROCESSORS)
   while (!done) {
     float myDiff = 0.f;
    diff = 0.f:
    barrier(myBarrier, NUM PROCESSORS);
     for (j=mvMin to mvMax) {
        for (i = red cells in this row) {
           float prev = A[i,j];
           A[i,j] = 0.2f * (A[i-1,j] + A[i,j-1] + A[i,j] +
                            A[i+1,j], A[i,j+1]);
           myDiff += abs(A[i,j] - prev));
     lock(myLock);
     diff += myDiff;
     unlock(mvLock);
    barrier(myBarrier, NUM PROCESSORS);
     if (diff/(n*n) < TOLERANCE)</pre>
                                            // check convergence, all threads get same answer
        done = true;
     barrier(myBarrier, NUM PROCESSORS);
}
```

Shared address space solver: one barrier

```
Idea:
                        // grid size
int
        done = false;
bool
LOCK
        myLock;
                                                   Remove dependencies by using different diff
BARRIER myBarrier;
float diff[3]; // global diff, but now 3 copies
                                                   variables in successive loop iterations
float *A = allocate(n+2, n+2);
                                                   Trade off footprint for removing dependencies!
void solve(float* A) {
  float myDiff; // thread local variable
                                                   (a common parallel programming technique)
  int index = 0; // thread local variable
  diff[0] = 0.0f;
  barrier(myBarrier, NUM PROCESSORS); // one-time only: just for init
  while (!done) {
   myDiff = 0.0f;
    // perform computation (accumulate locally into myDiff)
    lock(myLock);
    diff[index] += myDiff; // atomically update global diff
    unlock(myLock);
    diff[(index+1) % 3] = 0.0f;
   barrier(myBarrier, NUM PROCESSORS);
    i+ (diff|index|/(n*n) < TOLERANCE)</pre>
      break;
    index = (index + 1) \% 3;
```

More on specifying dependencies

Barriers: simple, but conservative (coarse-granularity dependencies)

 All work in program up until this point (for all threads) must finish before any thread begins next phase

Specifying specific dependencies can increase performance (by revealing more parallelism)

Example: two threads. One produces a result, the other consumes it.

```
T0

// produce x, then let T1 know
x = 1;
// of x here
flag = 1;
// do more work here...
while (flag == 0);
print x;
```

We just implemented a message queue (of length 1)

```
TO \rightarrow \Box \Box \Box \rightarrow TT
```

Solver implementation in two programming models

Data-parallel programming model

- Synchronization:
 - Single logical thread of control, but iterations of forall loop <u>may</u> be parallelized by the system (implicit barrier at end of forall loop body)
- Communication
 - Implicit in loads and stores (like shared address space)
 - Special built-in primitives for more complex communication patterns:
 e.g., reduce

Shared address space


- **Synchronization:**
 - Mutual exclusion required for shared variables (e.g., via locks)
 - Barriers used to express dependencies (between phases of computation)
- Communication
 - Implicit in loads/stores to shared variables

Message-passing expression of solver


Let's think about expressing a parallel grid solver with communication via messages


- Each thread has its own address space
 - No shared address space abstraction (i.e., no shared variables)
- Threads communicate and synchronize by sending/receiving messages


One possible message passing machine configuration: a cluster of two workstations (you could make this cluster yourself using the machines in the GHC labs)

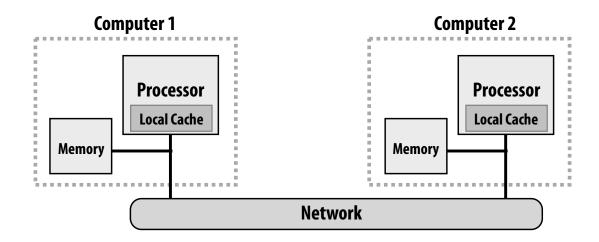


Message passing model: each thread operates in its own address space

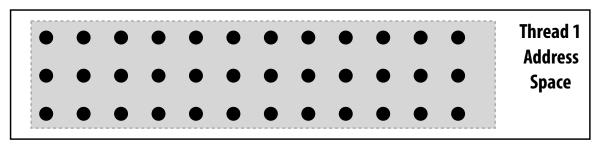








In this figure: four threads

The grid data is partitioned into four allocations, each residing in one of the four unique thread address spaces

(four per-thread private arrays)

Data replication is now required to correctly execute the program

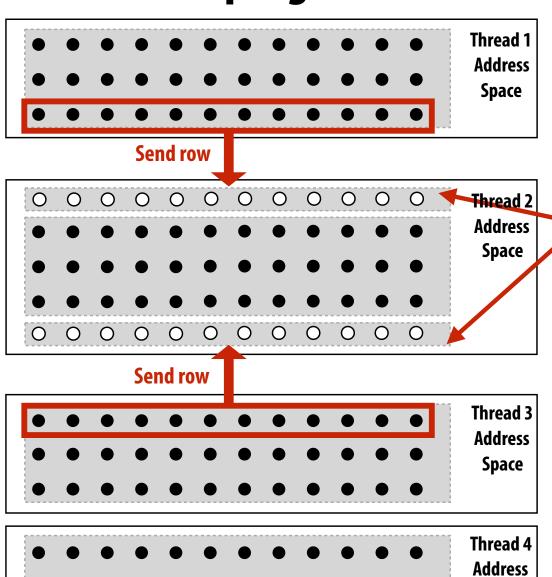

Example:

After red cell processing is complete, thread 1 and thread 3 send row of data to thread 2 (thread 2 requires up-to-date red cell information to update black cells in the next phase)

"Ghost cells" are grid cells replicated from a remote address space. It's common to say that information in ghost cells is "owned" by other threads.

Thread 2 logic:

Space

```
float* local_data = allocate(N+2,rows_per_thread+2);
int tid = get_thread_id();
int bytes = sizeof(float) * (N+2);

// receive ghost row cells (white dots)
recv(&local_data[0,0], bytes, tid-1);
recv(&local_data[rows_per_thread+1,0], bytes, tid+1);

// Thread 2 now has data necessary to perform
// future computation
```

Message passing solver

Similar structure to shared address space solver, but now communication is explicit in message sends and receives

Send and receive ghost rows to "neighbor threads"

Perform computation (just like in shared address space version of solver)

All threads send local my_diff to thread 0

Thread 0 computes global diff, evaluates termination predicate and sends result back to all other threads

```
int tid = get_thread_id();
int rows_per_thread = N / get_num_threads();
float* localA = allocate(rows_per_thread+2, N+2);
// assume localA is initialized with starting values
// assume MSG ID ROW, MSG ID DONE, MSG ID DIFF are constants used as msg ids
void solve() {
  bool done = false;
  while (!done) {
   float my_diff = 0.0f;
    if (tid != 0)
       send(&localA[1,0], sizeof(float)*(N+2), tid-1, MSG_ID_ROW);
    if (tid != get num threads()-1)
       send(&localA[rows per thread,0], sizeof(float)*(N+2), tid+1, MSG ID ROW);
    if (tid != 0)
       recv(&localA[0,0], sizeof(float)*(N+2), tid-1, MSG ID ROW);
    if (tid != get_num_threads()-1)
       recv(&localA[rows per thread+1,0], sizeof(float)*(N+2), tid+1, MSG ID ROW);
    for (int i=1; i<rows_per_thread+1; i++) {</pre>
       for (int j=1; j<n+1; j++) {
         float prev = localA[i,j];
         localA[i,j] = 0.2 * (localA[i-1,j] + localA[i,j] + localA[i+1,j] +
                              localA[i,j-1] + localA[i,j+1]);
         my_diff += fabs(localA[i,j] - prev);
   if (tid != 0) {
       send(&mydiff, sizeof(float), 0, MSG_ID_DIFF);
       recv(&done, sizeof(bool), 0, MSG ID DONE);
    } else {
       float remote diff;
       for (int i=1; i<get num threads()-1; i++) {</pre>
          recv(&remote_diff, sizeof(float), i, MSG_ID_DIFF);
          my diff += remote diff;
       if (my diff/(N*N) < TOLERANCE)
         done = true;
       for (int i=1; i<get num threads()-1; i++)</pre>
         send(&done, sizeof(bool), i, MSD ID DONE);
```

Notes on message passing example

Computation

Array indexing is relative to local address space (not global grid coordinates)

Communication:

- Performed by sending and receiving messages
- Bulk transfer: communicate entire rows at a time (not individual elements)

Synchronization:

- Performed by sending and receiving messages
- Think of how to implement mutual exclusion, barriers, flags using messages

For convenience, message passing libraries often include higher-level primitives (implemented via send and receive)

Synchronous (blocking) send and receive

- send(): call returns when sender receives acknowledgement that message data resides in address space of receiver
- recv(): call returns when data from received message is copied into address space of receiver and acknowledgement sent back to sender

Sender:	Receiver:
Call SEND(foo)	Call RECV(bar)
Copy data from buffer 'foo' in sender's address space into network buff	er
Send message ————————————————————————————————————	Receive message
	Copy data into buffer 'bar' in receiver's address space
Receive ack	———— Send ack
SEND() returns	RECV() returns

As implemented on the prior slide, there is a big problem with our message passing solver if it uses synchronous send/recv!

Why?

How can we fix it?


(while still using synchronous send/recv)

Message passing solver (fixed to avoid deadlock)

Send and receive ghost rows to "neighbor threads"

Even-numbered threads send, then receive

Odd-numbered thread recv, then send

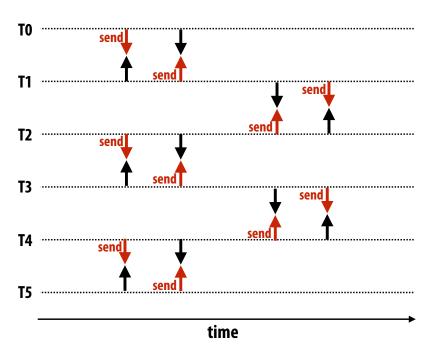

```
int N:
int tid = get_thread_id();
int rows_per_thread = N / get_num_threads();
float* localA = allocate(rows_per_thread+2, N+2);
// assume localA is initialized with starting values
// assume MSG_ID_ROW, MSG_ID_DONE, MSG_ID_DIFF are constants used as msg_ids
void solve() {
  bool done = false;
 while (!done) {
   float my_diff = 0.0f;
   if (tid % 2 == 0) {
      sendDown(); recvDown();
      sendUp();
                  recvUp();
   } else {
      recvUp(); sendUp();
      recvDown(); sendDown();
   }
   for (int i=1; i<rows per thread-1; i++) {
      for (int j=1; j<n+1; j++) {
        float prev = localA[i,j];
        localA[i,j] = 0.2 * (localA[i-1,j] + localA[i,j] + localA[i+1,j] +
                             localA[i,j-1] + localA[i,j+1]);
        my_diff += fabs(localA[i,j] - prev);
   if (tid != 0) {
      send(&mydiff, sizeof(float), 0, MSG_ID_DIFF);
      recv(&done, sizeof(bool), 0, MSG_ID_DONE);
   } else {
      float remote diff;
      for (int i=1; i<get_num_threads()-1; i++) {</pre>
         recv(&remote_diff, sizeof(float), i, MSG_ID_DIFF);
         my diff += remote diff;
      if (my diff/(N*N) < TOLERANCE)
        done = true;
      if (int i=1; i<gen num threads()-1; i++)</pre>
        send(&done, sizeof(bool), i, MSD_ID_DONE);
}
```

Non-blocking asynchronous send/recv

- send(): call returns immediately
 - Buffer provided to send() cannot be modified by calling thread since message processing occurs concurrently with thread execution
 - Calling thread can perform other work while waiting for message to be sent
- recv(): posts intent to receive in the future, returns immediately
 - Use checksend(), checkrecv() to determine actual status of send/receipt
 - Calling thread can perform other work while waiting for message to be received

Sender:	Receiver:
Call SEND(foo)	Call RECV(bar)
SEND returns handle h1	RECV(bar) returns handle h2
Copy data from 'foo' into network buffer	
Send message	→ Receive message
	Messaging library copies data into 'bar'
Call CHECKSEND(h1) // if message sent, now safe for thread to modify 'foo'	Call CHECKRECV(h2)
	// if received, now safe for thread
	// to access 'bar'

Summary

Amdahl's Law

 Overall maximum speedup from parallelism is limited by amount of serial execution in a program

Aspects of creating a parallel program

- Decomposition to create independent work, assignment of work to workers, orchestration (to coordinate processing of work by workers), mapping to hardware
- We'll talk a lot about making good decisions in each of these phases in the coming lectures (in practice, they are very inter-related)

Focus today: identifying dependencies

Focus soon: identifying locality, reducing synchronization