

1/3" CCD  
Industrial Color  
DSP Camera



(Lens not included)

The STC-630BT color camera provides excellent performance utilizing 10 bit digital signal processing (DSP). The camera features high quality color reproduction, a 1/3" high resolution IT CCD, electronic shutter to 1/10,000 of a second and composite video output. The STC-630BT is available in NTSC and PAL formats.

## Features

- AGC / Manual Gain
- Composite Output
- 1/3" IT CCD, 768(V) x 494(H)
- Electronic Shutter
- Low Speed Shutter
- Backlight Compensation
- Small size, Lightweight
- Uses 'CS' mount lenses, 'C' w/adapter
- 480 TV Lines
- White Balance: Manual, Full Auto
- Auto Iris
- 10 Bit DSP
- Negative / Positive Reversal
- NTSC & PAL Formats
- 1 Lux Minimum Illumination
- 12VDC

# STC-630BT/635BT Color Camera

## Technical Specifications

### STC-630BT

Pick Up Device	1/3" Interline CCD
Picture Elements	768(H) x 494(V)
Signal Format	NTSC
DSP	10 Bit
Horizontal Frequency	15.734kHz
Vertical Frequency	59.94Hz
Lens Mount	CS/C-Mount (w/adapter)
Sync System	Internal
Horizontal Resolution	480 TV Lines
Minimum Illumination	1 Lux @ F1.2
S/N Ratio	More than 48dB AGC Off
AGC	On/Off Selectable
Electronic Shutter	1/60-1/10,000 Auto/Fixed
Low Speed Shutter	2Fld-16Fld
Auto Iris	Direct Drive Control
White Balance	Manual, Full Auto
Video Output	1.0Vp-p 75 Ohms
Gamma	0.45
Backlight	Activated w/ AGC & Electronic Iris
Negative/Positive	Selectable
Output Connectors	BNC
Power Requirements	DC10-12V
Power Consumption	180mA
Operating Temp	-10deg. ~+40deg.C 14~104F
Dimensions (mm)	51(W) x 51(H) x 55.5(D)
Weight	190g


### STC-635BT

Pick Up Device	1/3" Interline CCD
Picture Elements	752(H) x 582(V)
Signal Format	PAL
DSP	10 Bit
Horizontal Frequency	15.625kHz
Vertical Frequency	50.0Hz
Lens Mount	CS/C-Mount (w/adapter)
Sync System	Internal
Horizontal Resolution	480 TV Lines
Minimum Illumination	1 Lux @ F1.2
S/N Ratio	More than 48dB AGC=Off
AGC	On/Off Selectable
Electronic Shutter	1/50-1/10,000 Auto/Fixed
Low Speed Shutter	2Fld-16Fld
Auto Iris	Direct Drive Control
White Balance	Manual, Full Auto
Video Output	1.0Vp-p 75 Ohms
Gamma	0.45
Backlight	Activated w/ AGC & Electronic Iris
Negative/Positive	Selectable
Output Connectors	BNC
Power Requirements	DC10-12V
Power Consumption	180mA
Operating Temp	-10deg. ~+40deg.C(14~104F)
Dimensions (mm)	51(W) x 51(H) x 55.5(D)
Weight	190g

Weights and dimensions shown are approximate. Specifications are subject to change without notice. These products may be subject to export control regulations.

# SENTECH

Sensor Technologies America Inc.

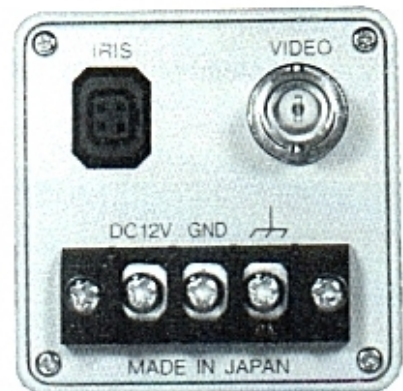

1015 North I-35E #206 Carrollton, TX 75006  
Phone: 972-245-4243 Fax: 972-446-0056  
Toll Free 877-736-8324 (877-SENTECH)  
Website: [www.sentechAmerica.com](http://www.sentechAmerica.com)