

Network Programming

15-213/15-503: Introduction to Computer Systems
21st Lecture, July 16, 2025

Instructors:

Brian Railing


Outline

- **Network types and structures**
- **Locating a host**
- **Setting up a connection**
- **HTTP Example**


Computer Networks

- A ***network*** is a hierarchical system of boxes and wires organized by geographical proximity
 - LAN (Local Area Network) spans a building or campus
 - Ethernet is most prominent example
 - WAN (Wide Area Network) spans country or world
 - Typically high-speed point-to-point (mostly optical) links
 - Also: SAN (Storage area network), MAN (Metropolitan), etc., etc.
- An ***internetwork (internet)*** is an interconnected set of networks
 - The Global IP Internet (uppercase “I”) is the most famous example of an internet (lowercase “i”)
- Let’s see how an internet is built from the ground up

Hardware Organization of a Network Host

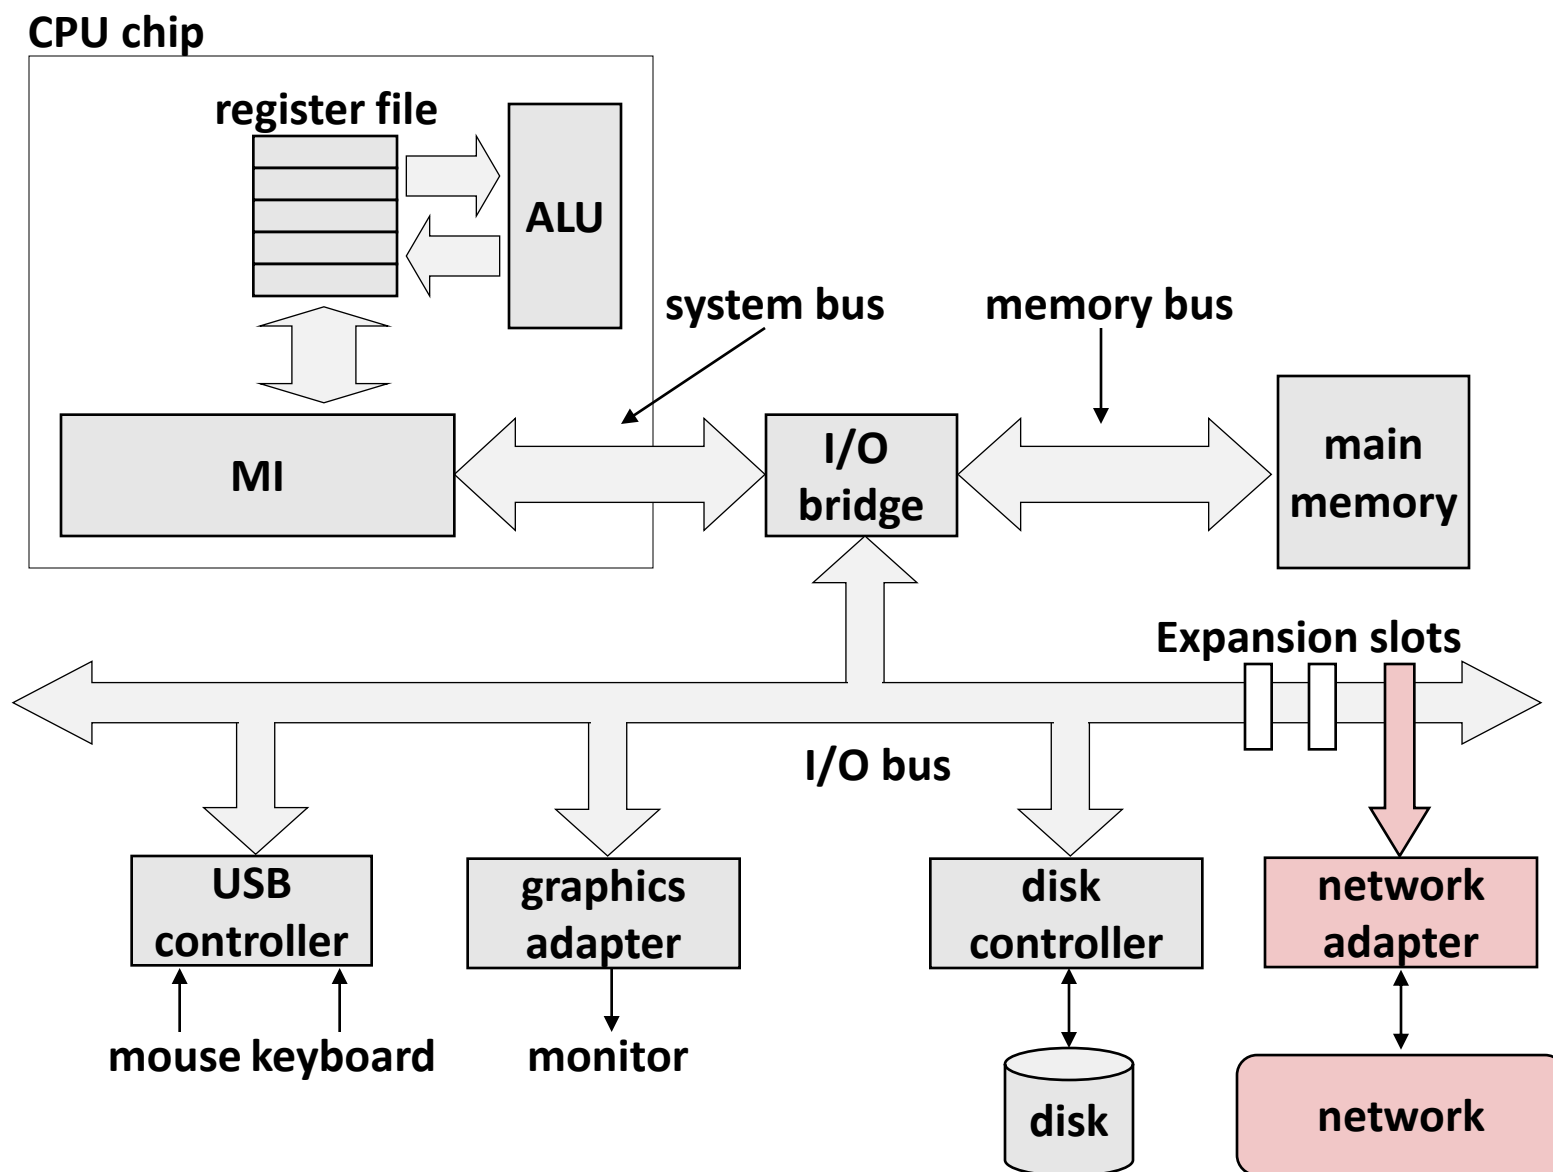


Example Lowest Level: Ethernet

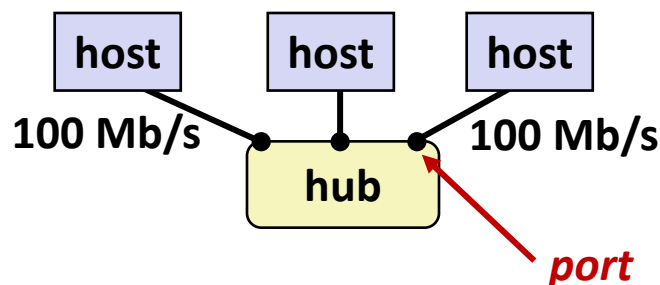

- Ethernet segment consists of a collection of *hosts* connected by wires (twisted pairs) to a *hub*
- Spans room or floor in a building
- Operation
 - Each Ethernet adapter has a unique 48-bit address (MAC address)
 - E.g., 00:16:ea:e3:54:e6


Next Level: Bridged Ethernet Segment

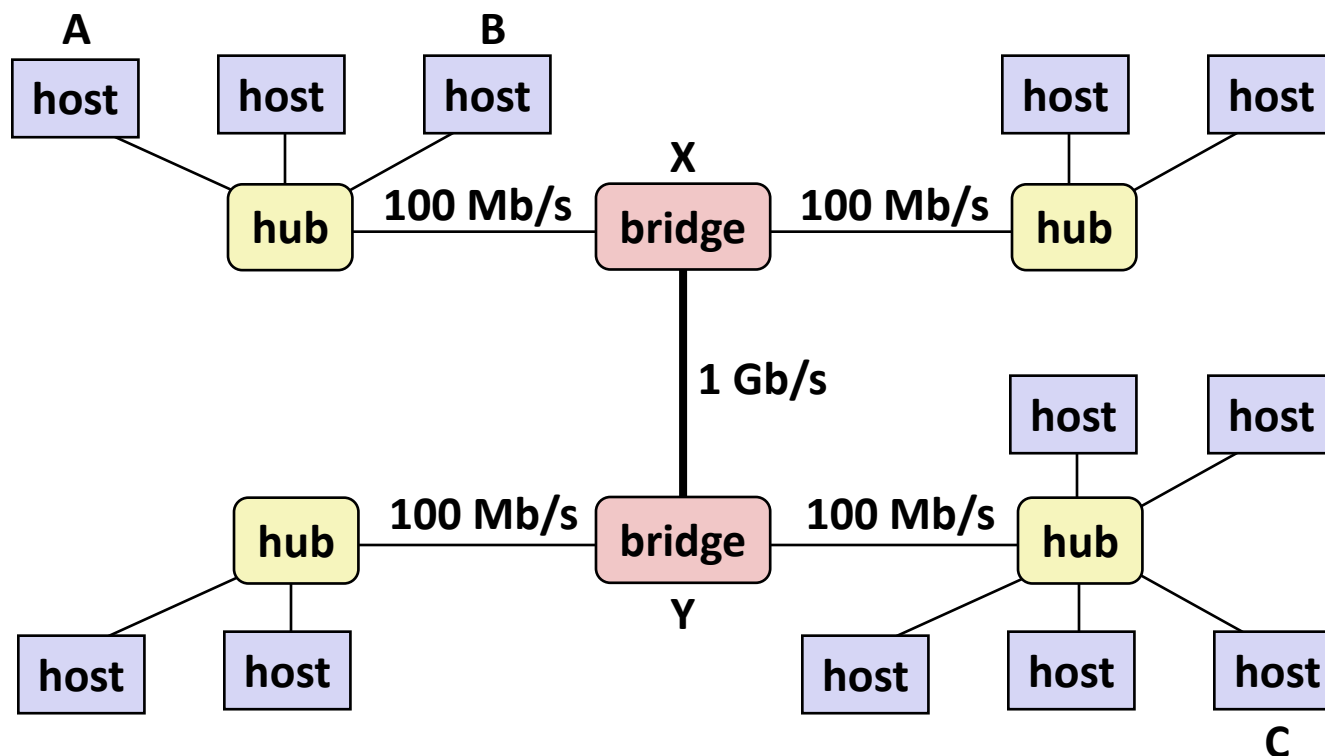

- Spans building or campus
- Bridges cleverly learn which hosts are reachable from which ports and then selectively copy frames from port to port


Conceptual View of LANs

- For simplicity, hubs, bridges, and wires are often shown as a collection of hosts attached to a single wire:




Next Level: internets

- Multiple incompatible LANs can be physically connected by specialized computers called *routers*
- The connected networks are called an *internet* (lower case)

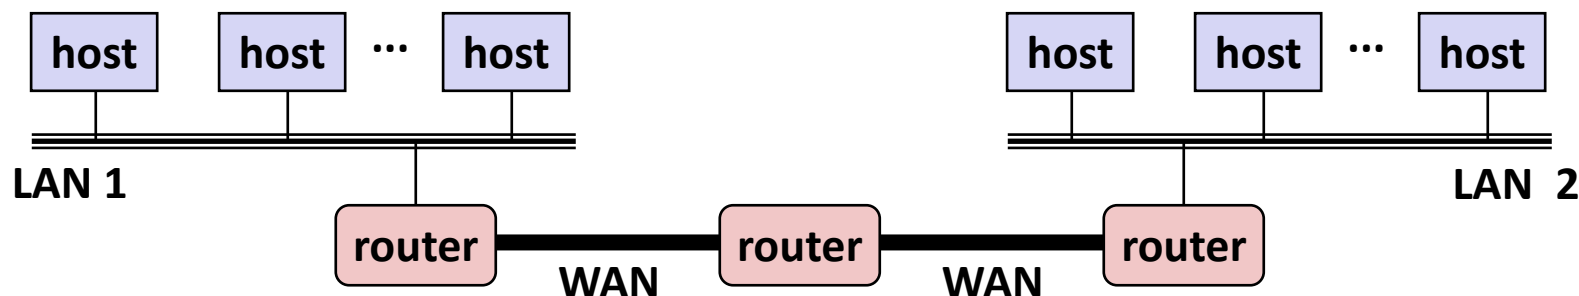

LAN 1 and LAN 2 might be completely different, totally incompatible (e.g., Ethernet, Fibre Channel, 802.11, T1-links, DSL, ...)*

Logical Structure of an internet

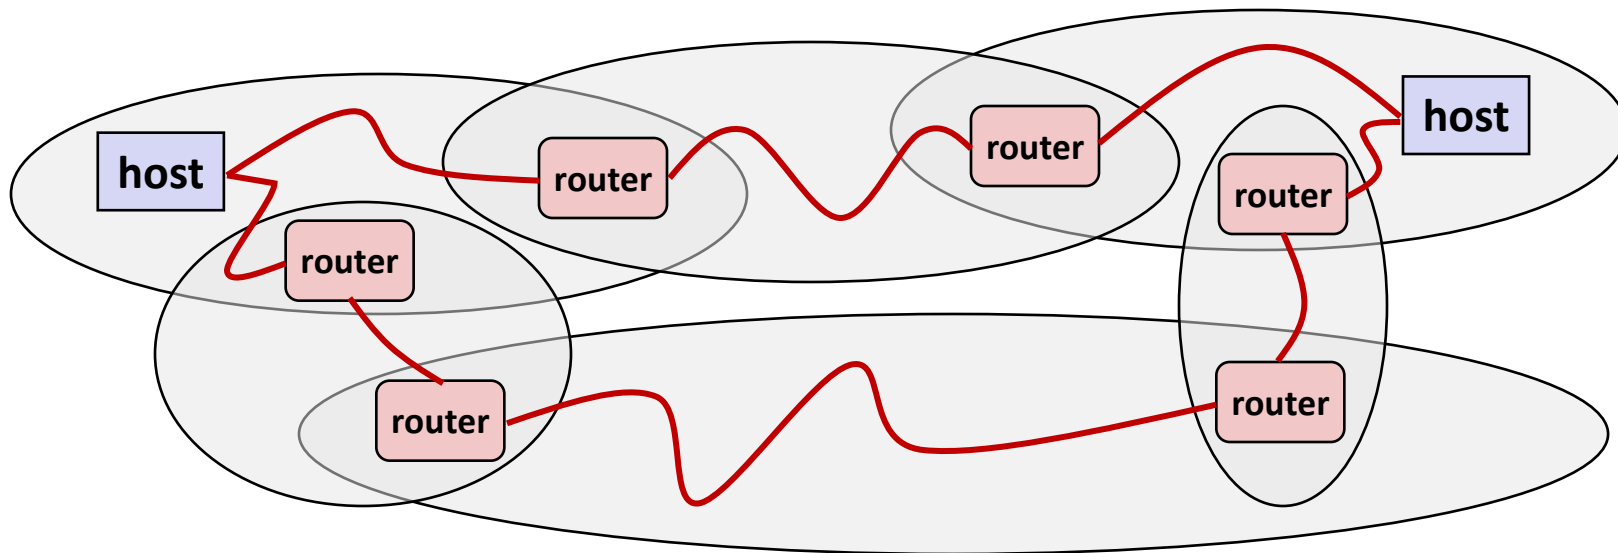

■ Ad hoc interconnection of networks

- No particular topology
- Vastly different router & link capacities

■ Send packets from source to destination by hopping through networks

- Router forms bridge from one network to another
- Different packets may take different routes

The Notion of an internet Protocol

- How is it possible to send bits across incompatible LANs and WANs?
- Solution: *protocol* software running on each host and router
 - Protocol is a set of rules that governs how hosts and routers should cooperate when they transfer data from network to network.
 - Smooths out the differences between the different networks

What Does an internet Protocol Do?


■ Provides a *naming scheme*

- An internet protocol defines a uniform format for *host addresses*
- Each host (and router) is assigned at least one of these internet addresses that uniquely identifies it

■ Provides a *delivery mechanism*

- An internet protocol defines a standard transfer unit (*packet*)
- Packet consists of *header* and *payload*
 - Header: contains info such as packet size, source and destination addresses
 - Payload: contains data bits sent from source host

Transferring internet Data Via Encapsulation

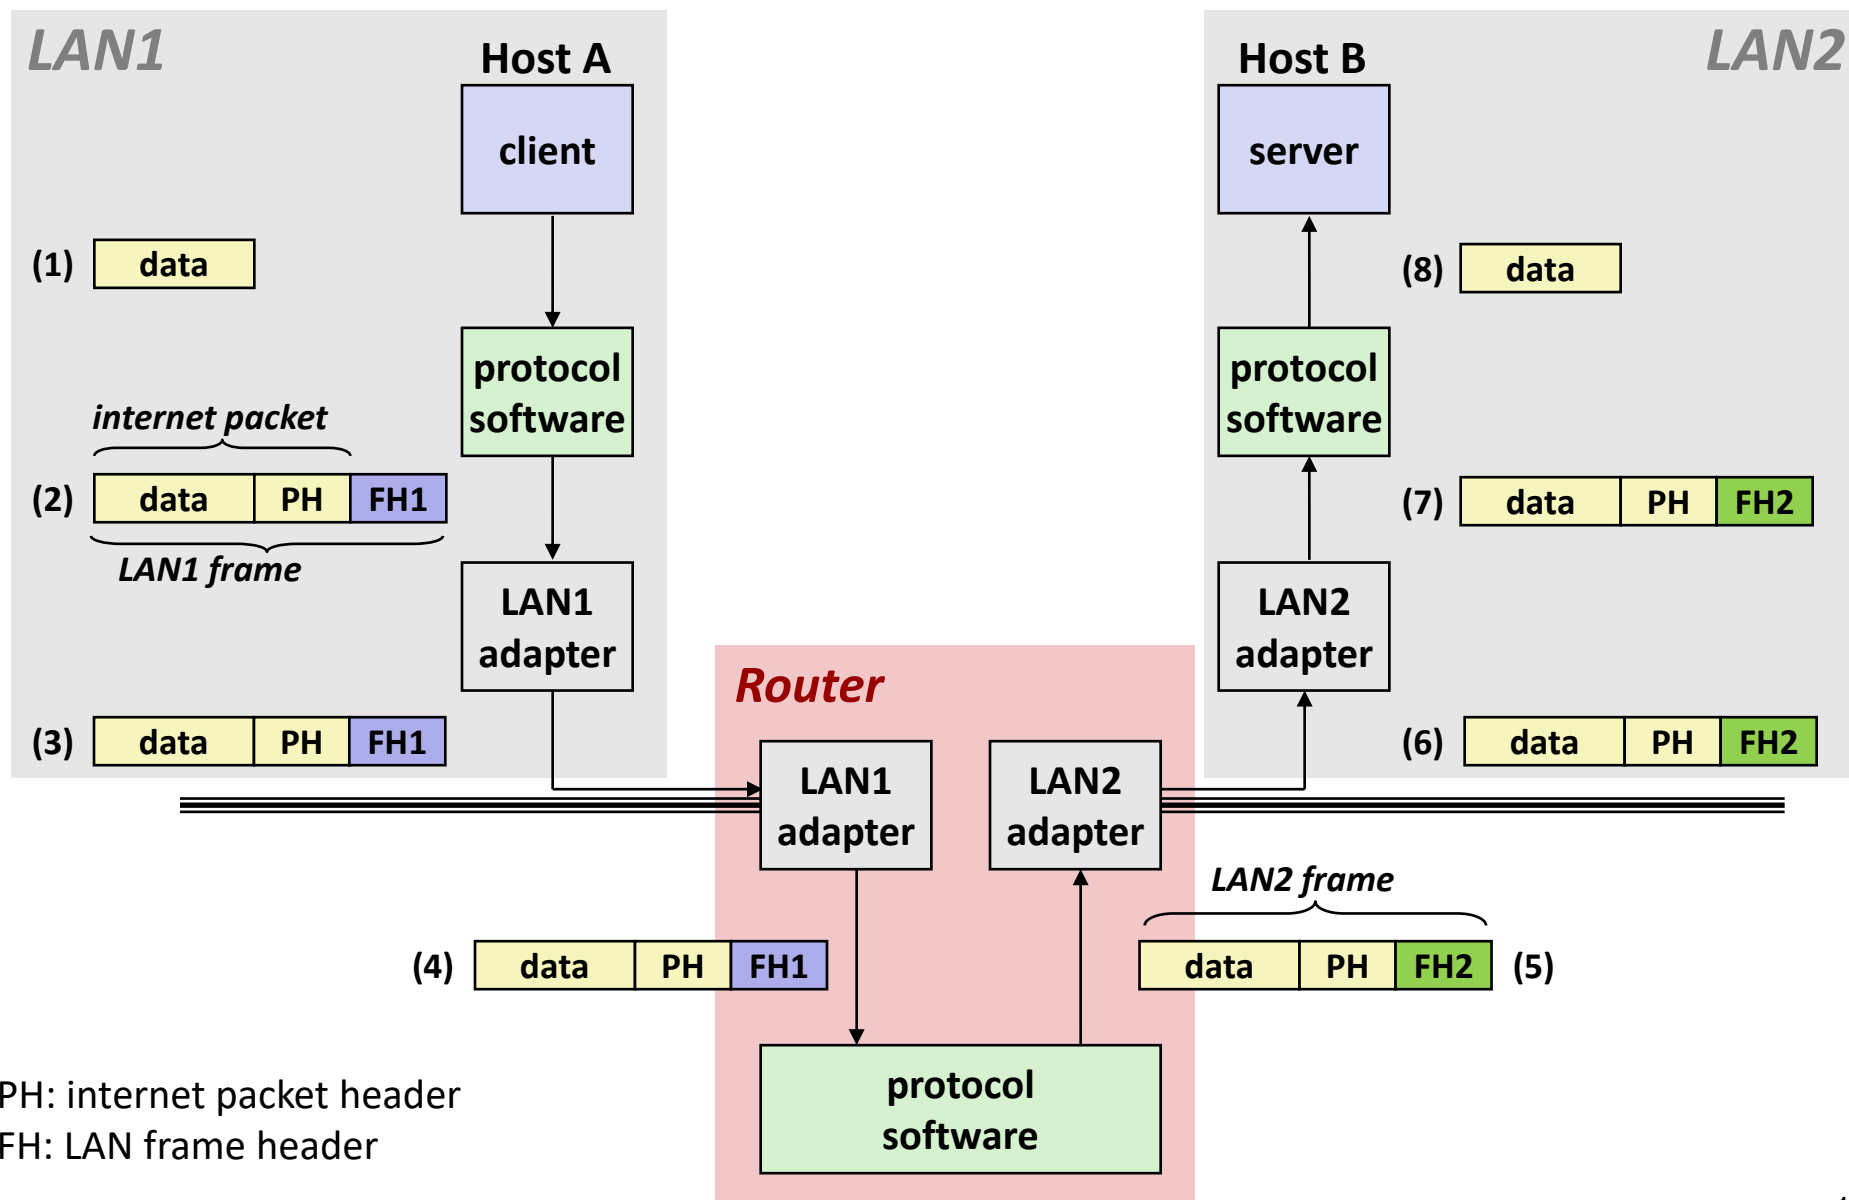

Other Issues


- **We are glossing over a number of important questions:**
 - What if different networks have different maximum frame sizes? (segmentation)
 - How do routers know where to forward frames?
 - How are routers informed when the network topology changes?
 - What if packets get lost?

- **These (and other) questions are addressed by the area of systems known as *computer networking***

Global IP Internet (upper case)

- Most famous example of an internet
- Based on the TCP/IP protocol family
 - IP (Internet Protocol)
 - Provides *basic naming scheme* and unreliable *delivery capability* of packets (datagrams) from *host-to-host*
 - UDP (User Datagram Protocol)
 - Uses IP to provide *unreliable* datagram delivery from *process-to-process*
 - TCP (Transmission Control Protocol)
 - Uses IP to provide *reliable* byte streams from *process-to-process* over *connections*
- Accessed via a mix of Unix file I/O and functions from the *sockets interface*

Hardware and Software Organization of an Internet Application

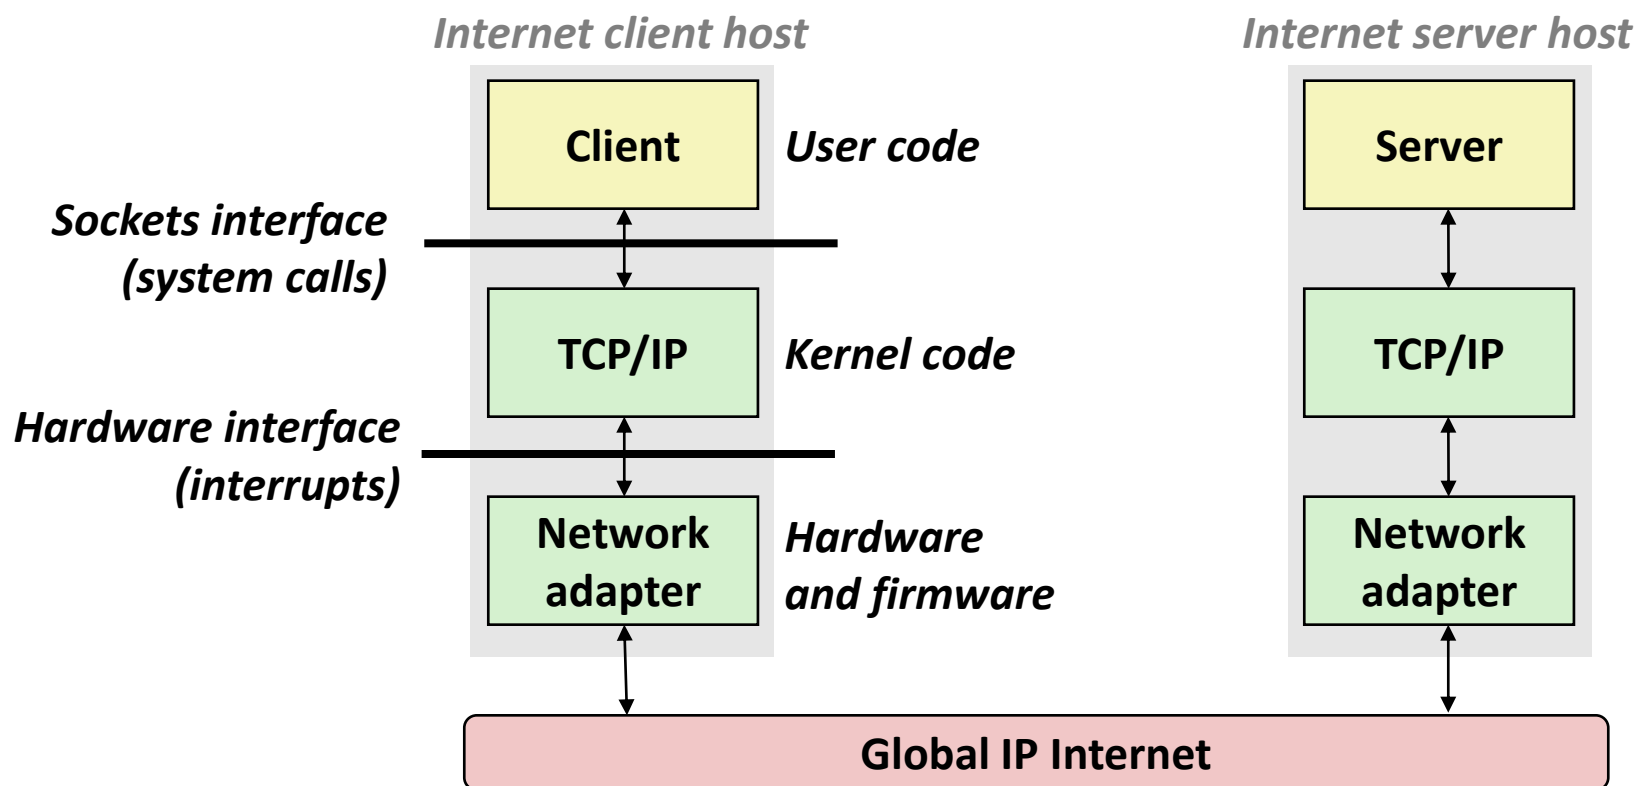

A Programmer's View of the Internet

1. Hosts are mapped to a set of 32-bit *IP addresses*

- 128.2.203.179
- 127.0.0.1 (always *localhost*)

2. As a convenience for humans, the Domain Name System maps a set of identifiers called Internet *domain names* to IP addresses:

- www.cs.cmu.edu “resolves to” 128.2.217.3


3. A process on one Internet host can communicate with a process on another Internet host over a *connection*

Aside: IPv4 and IPv6

- **IPv4 (Internet Protocol version 4) specified 1981**
 - 32-bit host addresses (192.0.2.43)
 - Known to not be enough for everyone since ~1990
- **IPv6 (Internet Protocol version 6) specified 1996**
 - 128-bit addresses (2001:0db8:0:0:0:0:cafe:la7e)
 - Intended to replace IPv4
 - Very slow adoption due to need to replace routers (CMU's network doesn't support IPv6 at all!)
- **Application programmers mostly don't have to care**
 - Sockets API makes it easy to write code that seamlessly uses either, as necessary

IPv6 traffic to Google

<https://www.google.com/intl/en/ipv6/statistics.html>

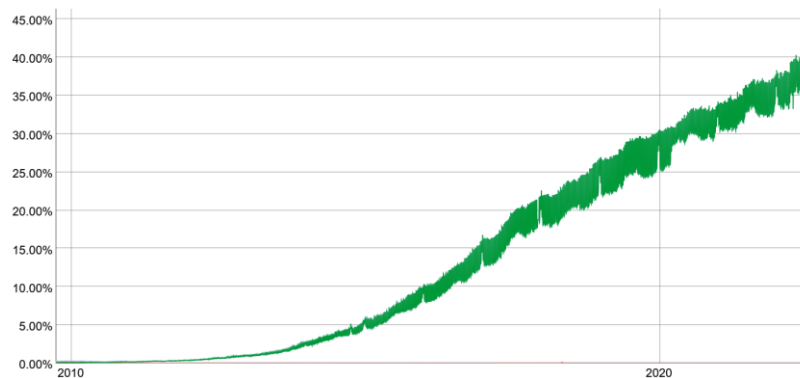

(1) IP Addresses


- 32-bit IP addresses are stored in an *IP address struct*
 - IP addresses are always stored in memory in *network byte order* (big-endian byte order)
 - True in general for any integer transferred in a packet header from one machine to another.
 - E.g., the port number used to identify an Internet connection.

```
/* Internet address structure */
struct in_addr {
    uint32_t    s_addr; /* network byte order (big-endian) */
};
```

Dotted Decimal Notation

- By convention, each byte in a 32-bit IP address is represented by its decimal value and separated by a period
 - IP address: `0x8002C2F2` = `128.2.194.242`
- Use `getaddrinfo` and `getnameinfo` functions (described later) to convert between IP addresses and dotted decimal format.

(2) Internet Domain Names

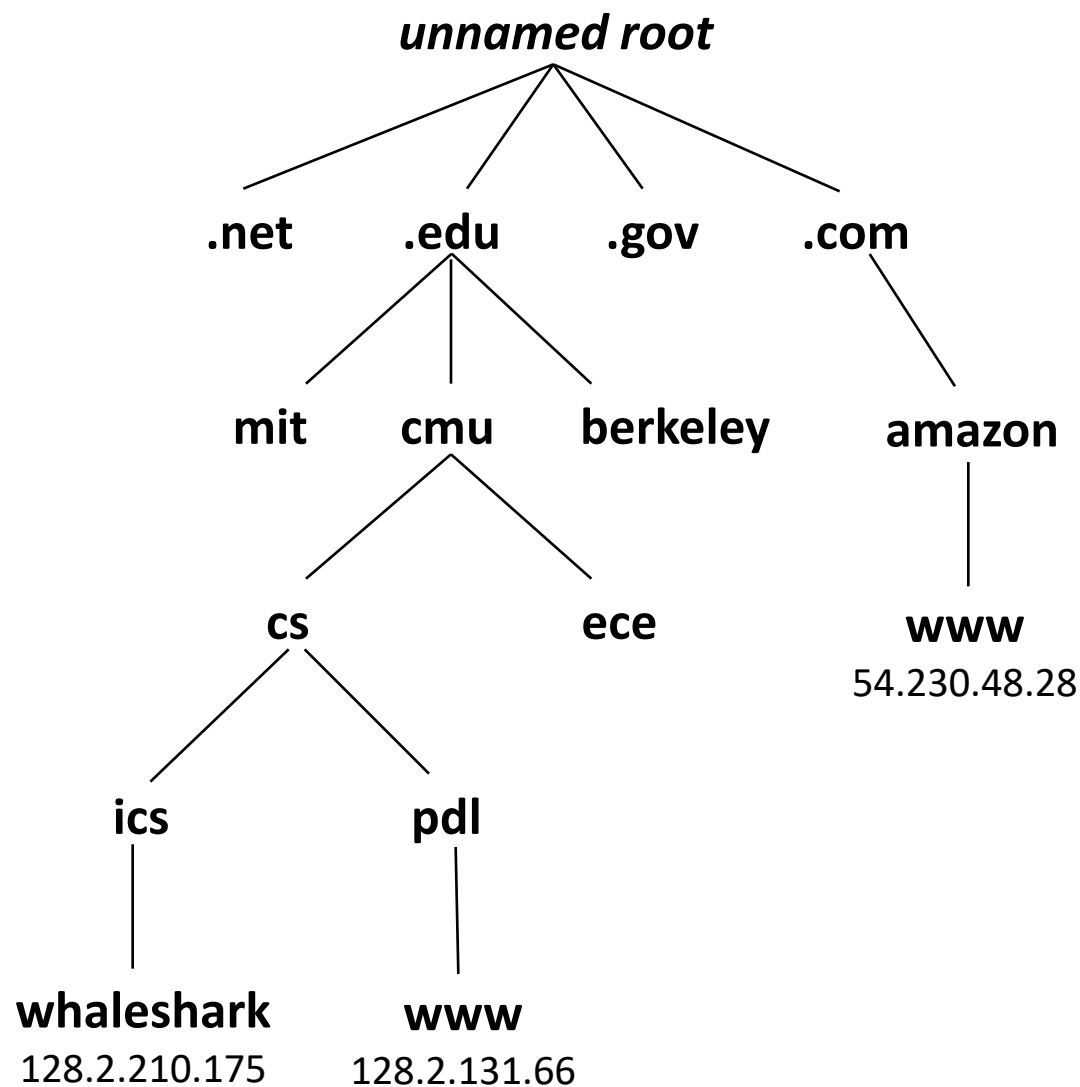

Domain Naming System (DNS)

- The Internet maintains a mapping between IP addresses and domain names in a worldwide distributed database called **DNS**
- Conceptually, programmers can view the DNS database as a collection of millions of *host entries*.
 - Each host entry defines the mapping between a set of domain names and IP addresses.
 - In a mathematical sense, a host entry is an equivalence class of domain names and IP addresses.

Properties of DNS Mappings

- Can explore properties of DNS mappings using `nslookup`
 - (Output edited for brevity)
- Each host has a locally defined domain name `localhost` which always maps to the *loopback address* `127.0.0.1`
- Use `hostname` to determine real domain name of local host:

```
linux> nslookup localhost  
Address: 127.0.0.1
```

```
linux> hostname  
whaleshark.ics.cs.cmu.edu
```

Properties of DNS Mappings (cont)

- Simple case: one-to-one mapping between domain name and IP address:

```
linux> nslookup whaleshark.ics.cs.cmu.edu  
Address: 128.2.210.175
```

- Multiple domain names mapped to the same IP address:

```
linux> nslookup cs.mit.edu  
Address: 18.25.0.23  
linux> nslookup eeecs.mit.edu  
Address: 18.25.0.23
```

- And backwards:

```
linux> nslookup 18.25.0.23  
23.0.25.18.in-addr.arpa      name = eeecs.mit.edu.
```

Properties of DNS Mappings (cont)

- Multiple domain names mapped to multiple IP addresses:

```
linux> nslookup www.twitter.com
Address: 104.244.42.65
Address: 104.244.42.129
Address: 104.244.42.193
Address: 104.244.42.1
```

```
linux> nslookup www.twitter.com
Address: 104.244.42.129
Address: 104.244.42.65
Address: 104.244.42.193
Address: 104.244.42.1
```

- Some valid domain names don't map to any IP address:

```
linux> nslookup ics.cs.cmu.edu
(No Address given)
```



Outline

- Network types and structures
- Locating a host
- Setting up a connection
- HTTP Example

A Client-Server Transaction

■ Most network applications are based on the client-server model:

- A **server** process and one or more **client** processes
- Server manages some **resource**
- Server provides **service** by manipulating resource for clients
- Server activated by request from client (vending machine analogy)

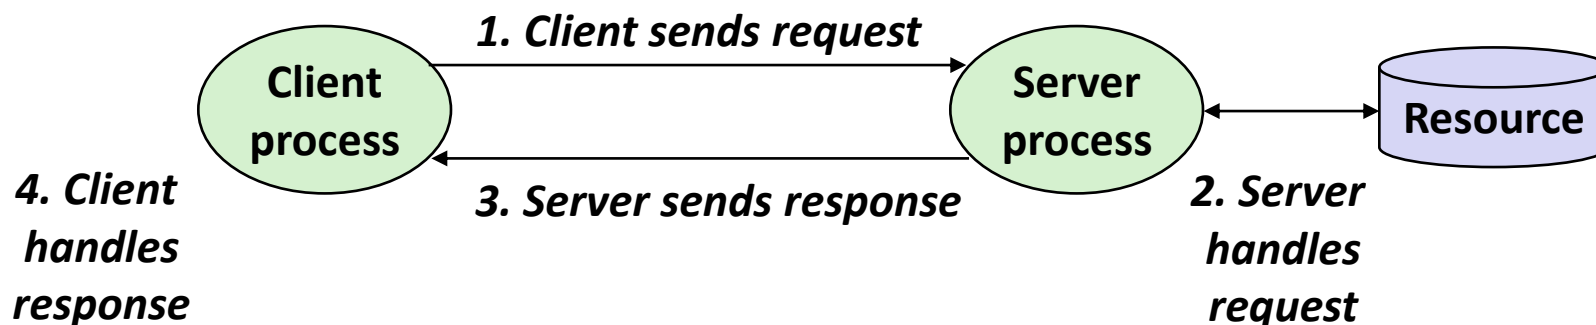

*Note: clients and servers are processes running on hosts
(can be the same or different hosts)*

(3) Internet Connections


- Clients and servers most often communicate by sending streams of bytes over TCP *connections*. Each connection is:
 - *Point-to-point*: connects a pair of processes.
 - *Full-duplex*: data can flow in both directions at the same time,
 - *Reliable*: stream of bytes sent by the source is eventually received by the destination in the same order it was sent.
- A *socket* is an endpoint of a connection
 - *Socket address* is an `IPAddress:port` pair
- A *port* is a 16-bit integer that identifies a process:
 - *Ephemeral port*: Assigned automatically by client kernel when client makes a connection request.
 - *Well-known port*: Associated with some *service* provided by a server (e.g., port 80 is associated with Web servers)

Well-known Service Names and Ports

- Popular services have permanently assigned *well-known ports* and corresponding *well-known service names*:
 - echo servers: echo 7
 - ftp servers: ftp 21
 - ssh servers: ssh 22
 - email servers: smtp 25
 - Unencrypted Web servers: http 80
 - SSL/TLS encrypted Web: https 443
- Mappings between well-known ports and service names is contained in the file `/etc/services` on each Linux machine.

Anatomy of a Connection


- A connection is uniquely identified by the socket addresses of its endpoints (*socket pair*)
 - (cliaddr:cliport, servaddr:servport)

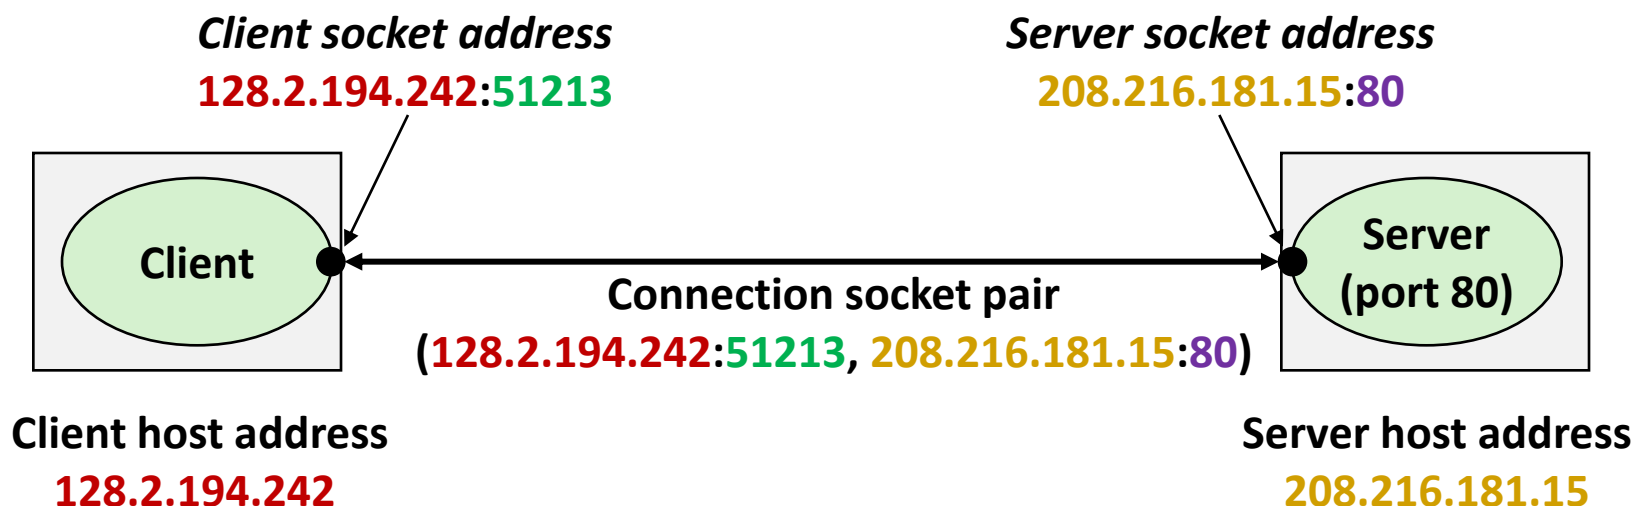

51213 is an ephemeral port allocated by the kernel

80 is a well-known port associated with Web servers

Using Ports to Identify Services

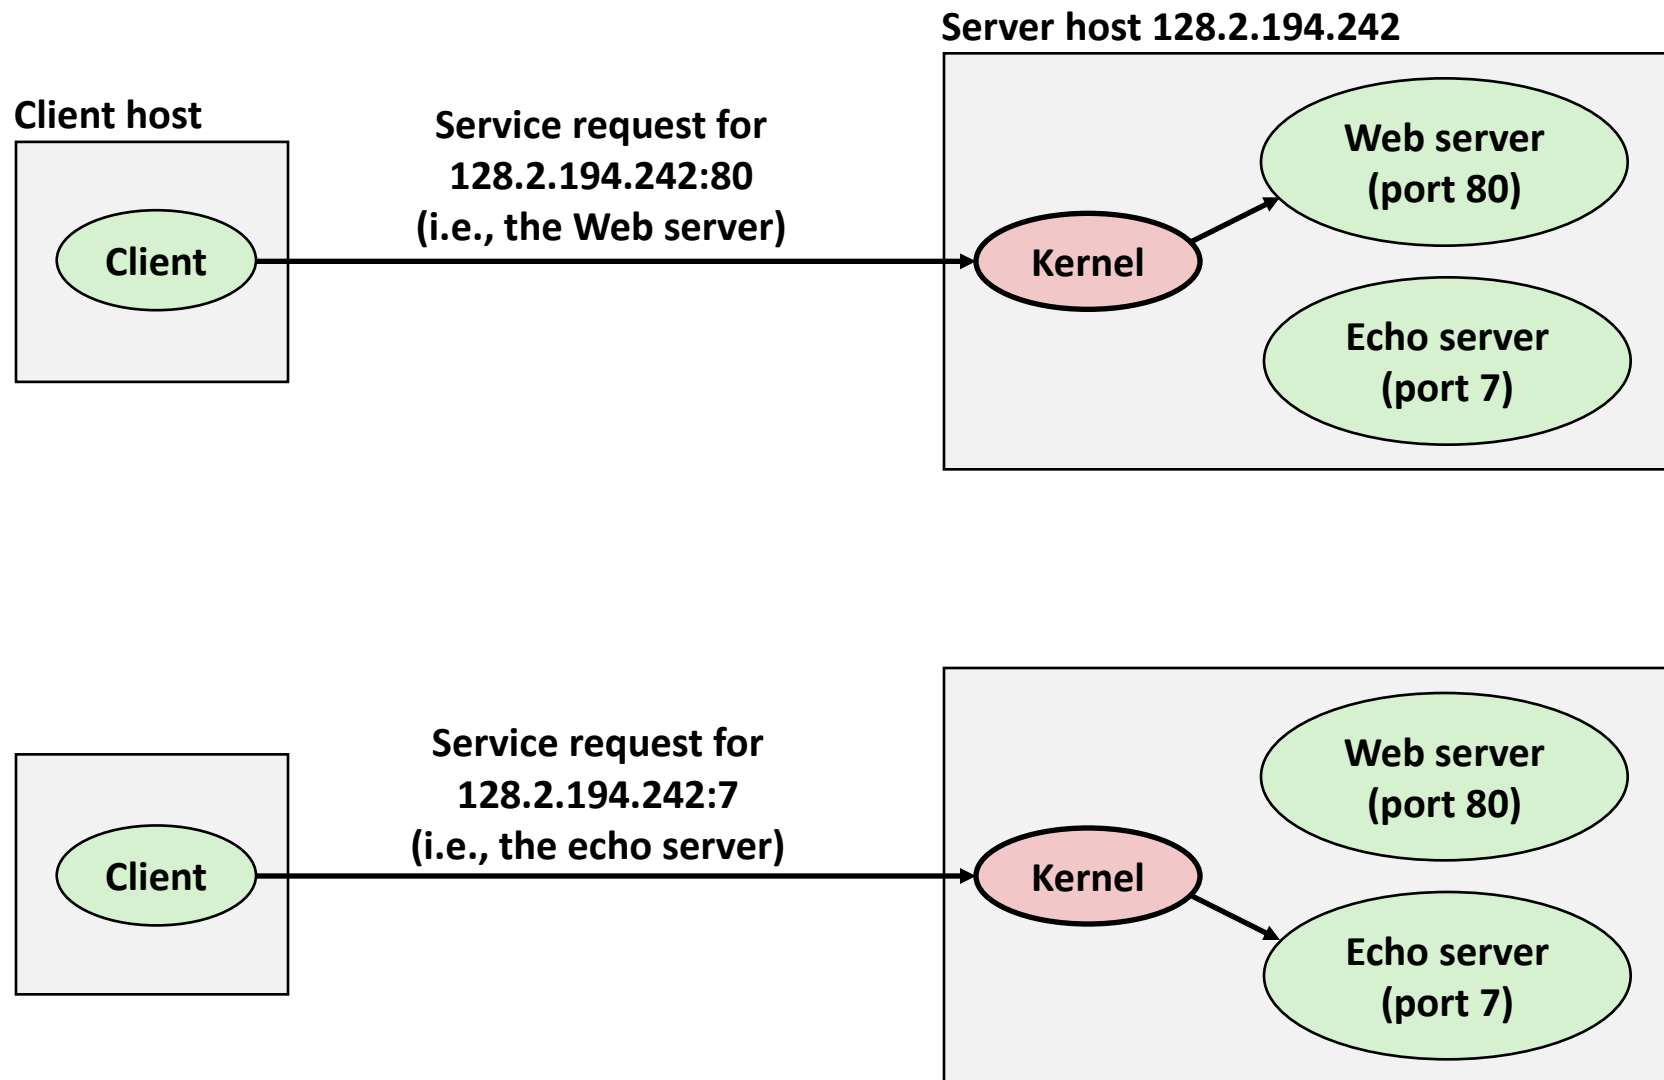

Quiz

<https://canvas.cmu.edu/courses/47415/quizzes/143259>

Sockets Interface

- **Set of system-level functions used in conjunction with Unix I/O to build network applications.**
- **Created in the early 80's as part of the original Berkeley distribution of Unix that contained an early version of the Internet protocols.**
- **Available on all modern systems**
 - Unix variants, Windows, OS X, IOS, Android, ARM

Sockets

■ What is a socket?

- To the kernel, a socket is an endpoint of communication
- To an application, a socket is a file descriptor that lets the application read/write from/to the network
- Using the FD abstraction lets you reuse code & interfaces

■ Clients and servers communicate with each other by reading from and writing to socket descriptors



■ The main distinction between regular file I/O and socket I/O is how the application “opens” the socket descriptors

Socket Programming Example

■ Echo server and client

■ Server

- Accepts connection request
- Repeats back lines as they are typed

■ Client

- Requests connection to server
- Repeatedly:
 - Read line from terminal
 - Send to server
 - Read reply from server
 - Print line to terminal


Echo Server/Client Session Example


Client

```
bambooshark: ./echoclient whaleshark.ics.cs.cmu.edu 6616      (A)
This line is being echoed                                     (B)
This line is being echoed
This one is, too                                             (C)
This one is, too
^D
bambooshark: ./echoclient whaleshark.ics.cs.cmu.edu 6616      (D)
This one is a new connection                                 (E)
This one is a new connection
^D
```

Server

```
whaleshark: ./echoserveri 6616
Connected to (BAMBOOSHARK.ICS.CS.CMU.EDU, 33707)             (A)
server received 26 bytes                                     (B)
server received 17 bytes                                     (C)
Connected to (BAMBOOSHARK.ICS.CS.CMU.EDU, 33708)             (D)
server received 29 bytes                                     (E)
```

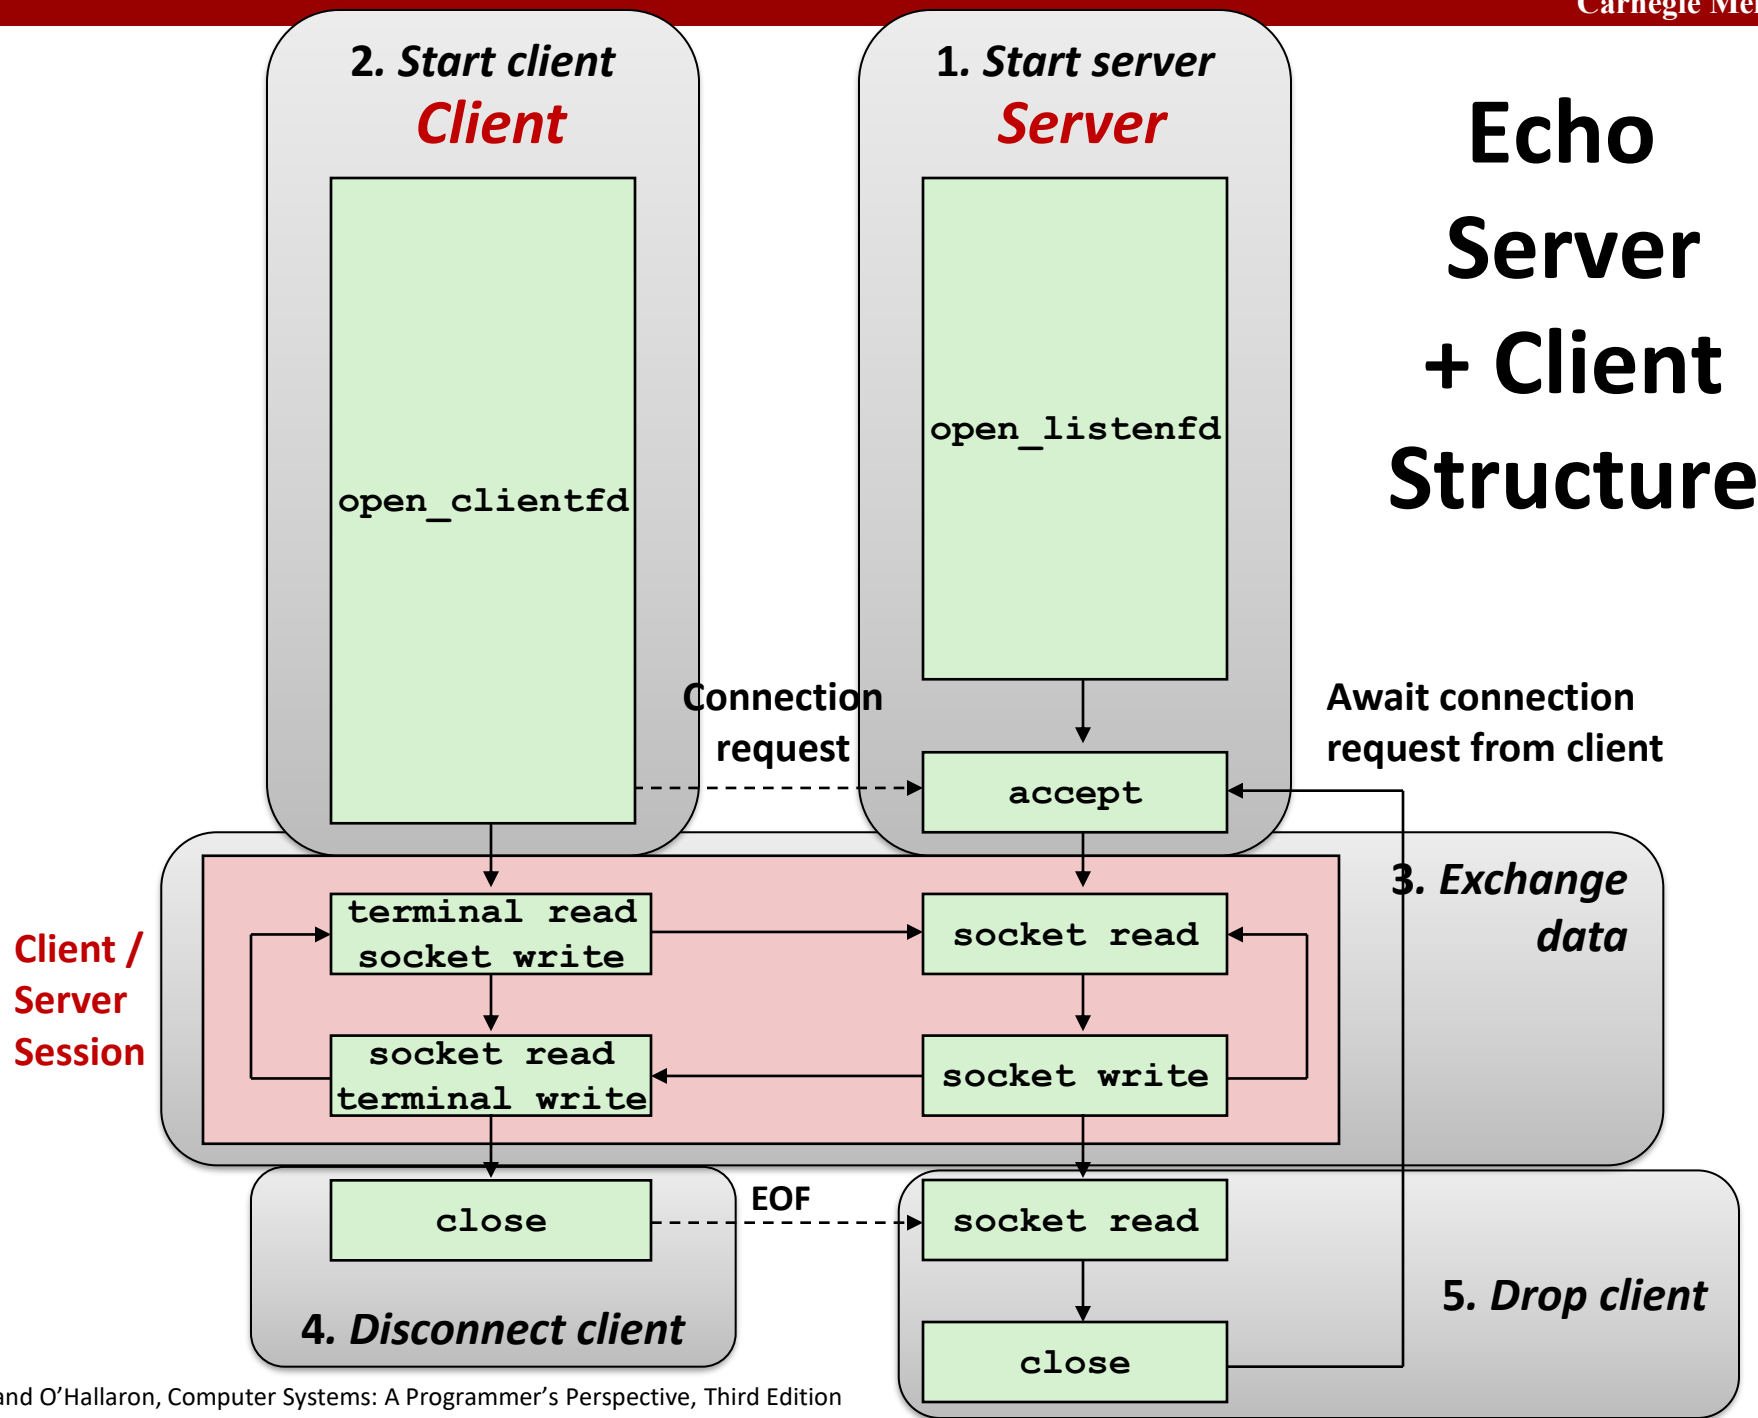

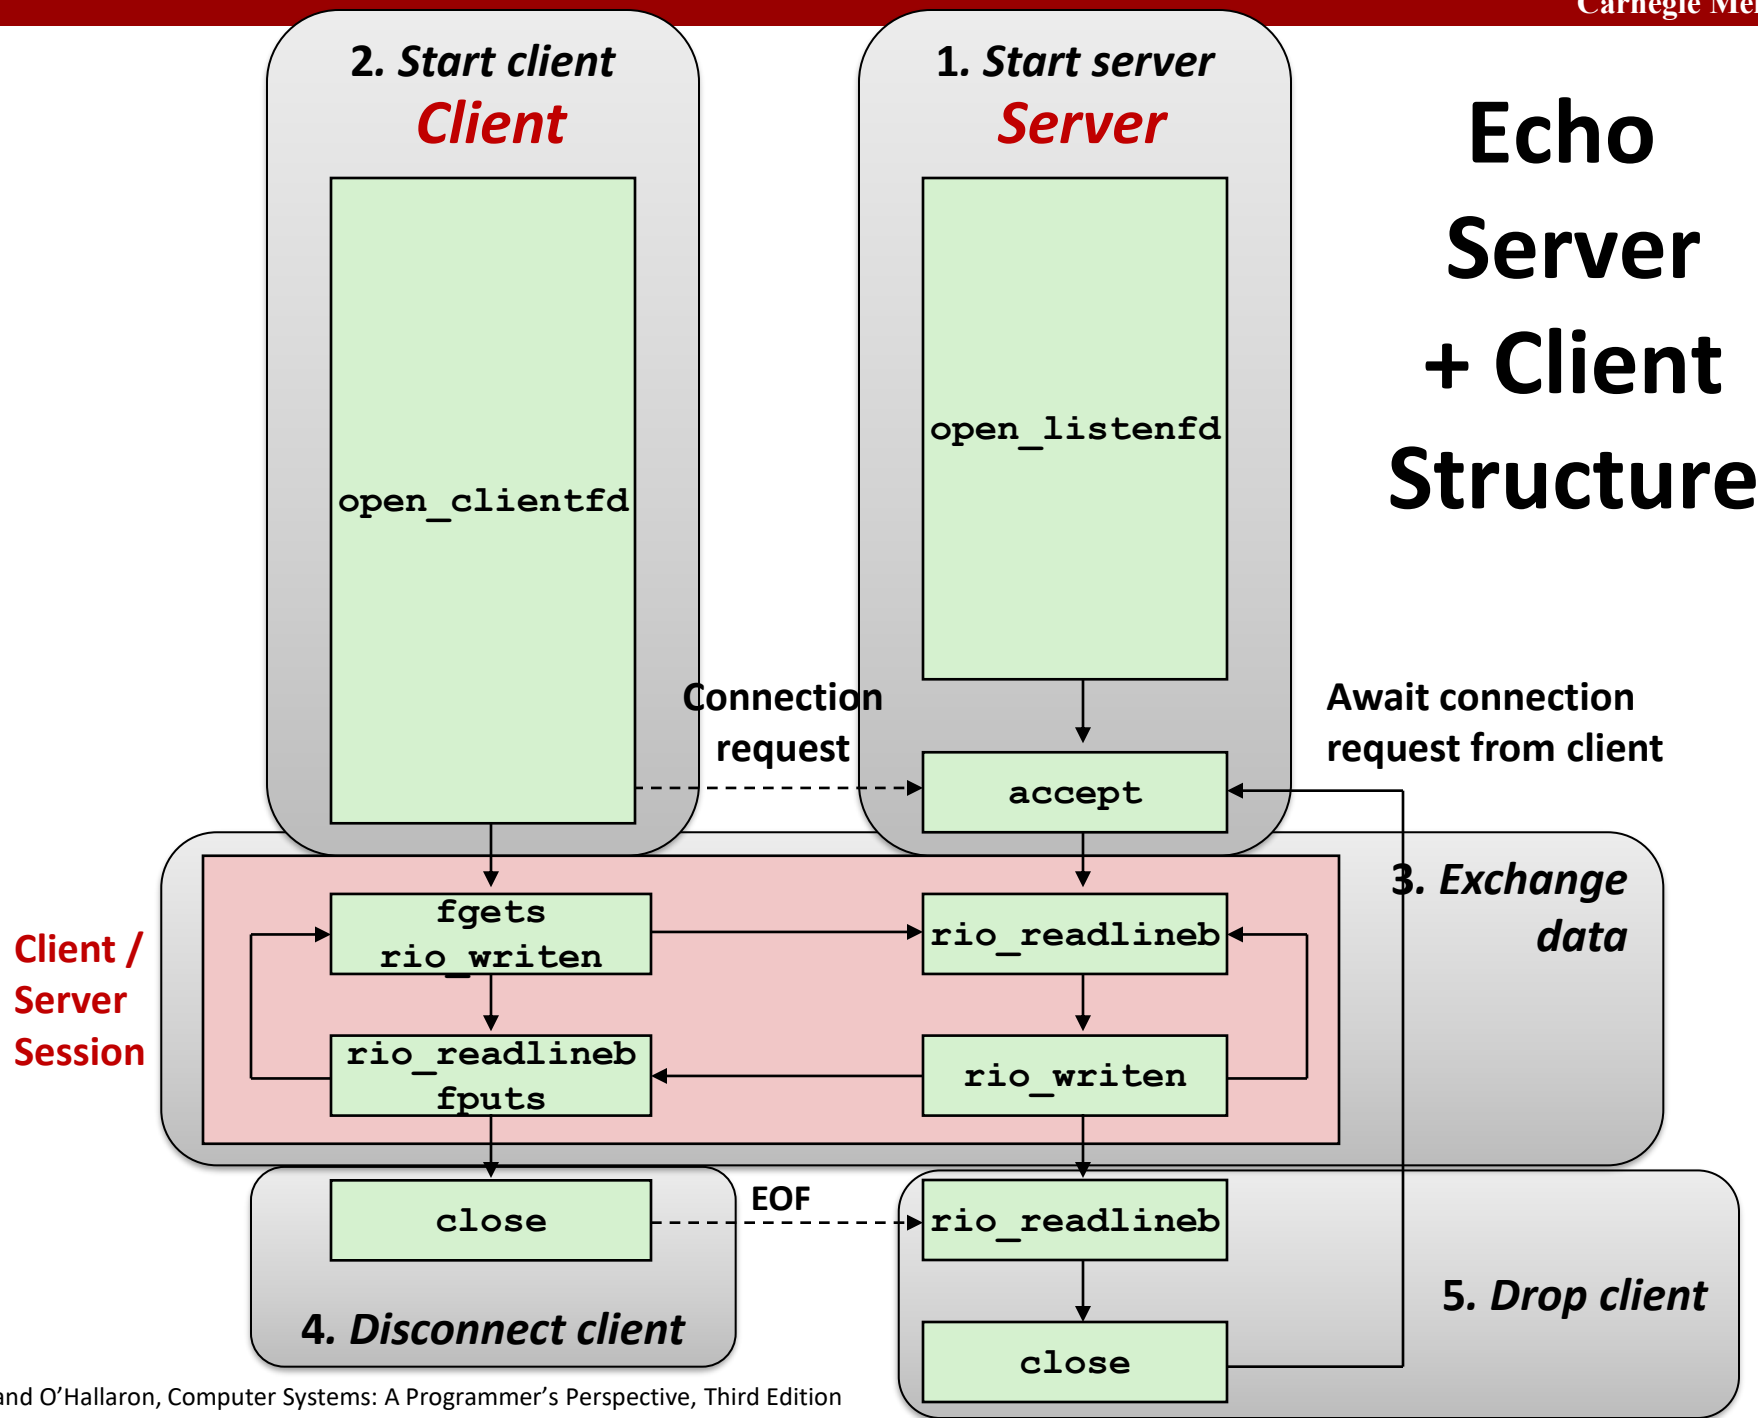

Recall: Unbuffered RIO Input/Output

- Same interface as Unix `read` and `write`
- Especially useful for transferring data on network sockets

```
#include "csapp.h"
```

```
ssize_t rio_readn(int fd, void *usrbuf, size_t n);  
ssize_t rio_writen(int fd, void *usrbuf, size_t n);
```

Return: num. bytes transferred if OK, 0 on EOF (`rio_readn` only), -1 on error

- `rio_readn` returns short count only if it encounters EOF
 - Only use it when you know how many bytes to read
- `rio_writen` never returns a short count
- Calls to `rio_readn` and `rio_writen` can be interleaved arbitrarily on the same descriptor

Recall: Buffered RIO Input Functions

- Efficiently read text lines and binary data from a file partially cached in an internal memory buffer

```
#include "csapp.h"

void rio_readinitb(rio_t *rp, int fd);

ssize_t rio_readlineb(rio_t *rp, void *usrbuf, size_t maxlen);
ssize_t rio_readnb(rio_t *rp, void *usrbuf, size_t n);
```

Return: num. bytes read if OK, 0 on EOF, -1 on error

- **rio_readlineb** reads a *text line* of up to **maxlen** bytes from file **fd** and stores the line in **usrbuf**
 - Especially useful for reading text lines from network sockets
- Stopping conditions
 - **maxlen** bytes read
 - EOF encountered
 - Newline ('\n') encountered

Echo Client: Main Routine

```
#include "csapp.h"


int main(int argc, char **argv)
{
    int clientfd;
    char *host, *port, buf[MAXLINE];
    rio_t rio;

    host = argv[1];
    port = argv[2];

    clientfd = Open_clientfd(host, port);
    Rio_readinitb(&rio, clientfd);

    while (Fgets(buf, MAXLINE, stdin) != NULL) {
        Rio_writen(clientfd, buf, strlen(buf));
        Rio_readlineb(&rio, buf, MAXLINE);
        Fputs(buf, stdout);
    }
    Close(clientfd);
    exit(0);
}
```

echoclient.c

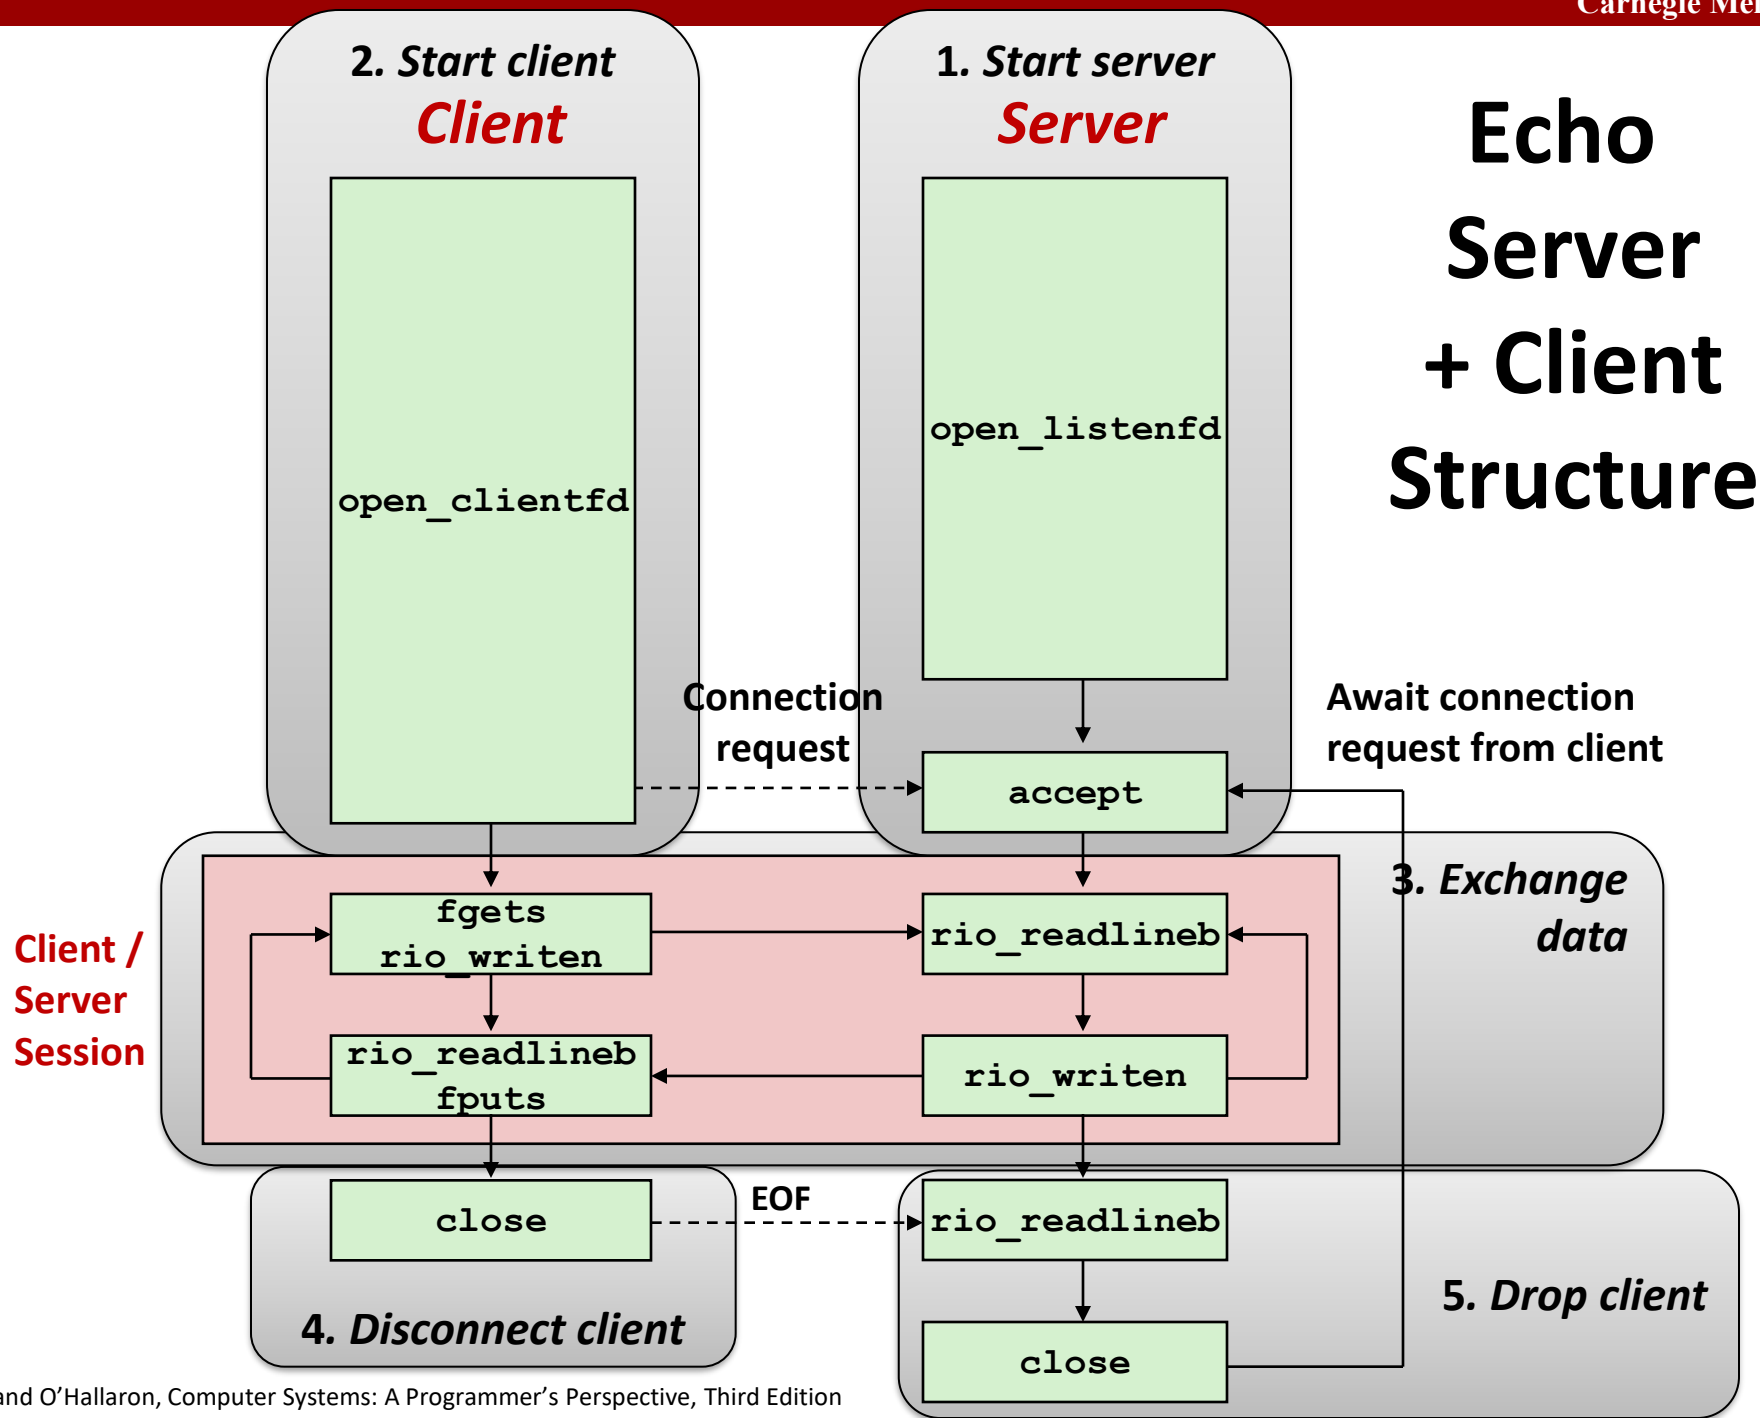

Iterative Echo Server: Main Routine

```
#include "csapp.h"
void echo(int connfd);

int main(int argc, char **argv)
{
    int listenfd, connfd;
    socklen_t clientlen;
    struct sockaddr_storage clientaddr; /* Enough room for any addr */
    char client_hostname[MAXLINE], client_port[MAXLINE];

    listenfd = Open_listenfd(argv[1]);
    while (1) {
        clientlen = sizeof(struct sockaddr_storage); /* Important! */
        connfd = Accept(listenfd, (SA *)&clientaddr, &clientlen);
        Getnameinfo((SA *)&clientaddr, clientlen,
                    client_hostname, MAXLINE, client_port, MAXLINE, 0);
        printf("Connected to (%s, %s)\n", client_hostname, client_port);
        echo(connfd);
        Close(connfd);
    }
    exit(0);
}
```

echoserveri.c

Echo Server: echo function


- The server uses RIO to read and echo text lines until EOF (end-of-file) condition is encountered.
 - EOF condition caused by client calling `close(clientfd)`

```
void echo(int connfd)
{
    size_t n;
    char buf[MAXLINE];
    rio_t rio;

    Rio_readinitb(&rio, connfd);
    while((n = Rio_readlineb(&rio, buf, MAXLINE)) != 0) {
        printf("server received %d bytes\n", (int)n);
        Rio_writen(connfd, buf, n);
    }
}
```

echo.c

Digging Deeper

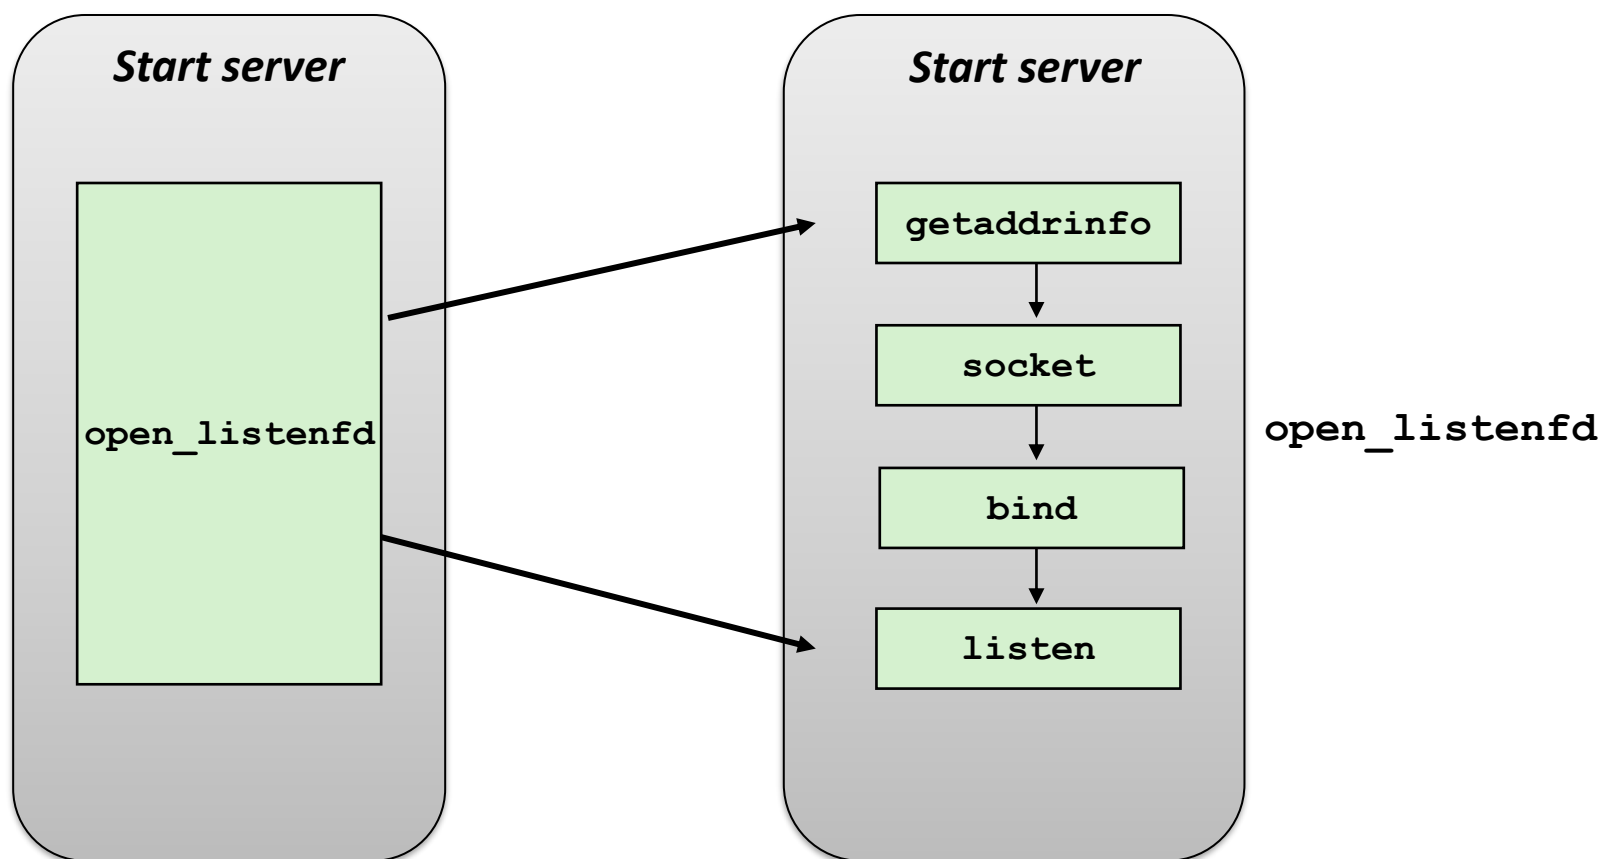

Host and Service Conversion: `getaddrinfo`

- **`getaddrinfo` is the modern way to convert string representations of hostnames, host addresses, ports, and service names to socket address structures.**
 - Replaces obsolete `gethostbyname` and `getservbyname` funcs.
- **Advantages:**
 - Reentrant (can be safely used by threaded programs).
 - Allows us to write portable protocol-independent code
 - Works with both IPv4 and IPv6
- **Disadvantages**
 - Somewhat complex
 - Fortunately, a small number of usage patterns suffice in most cases.

Host and Service Conversion: `getaddrinfo`


```
int getaddrinfo(const char *host,           /* Hostname or address */
               const char *service,        /* Port or service name */
               const struct addrinfo *hints, /* Input parameters */
               struct addrinfo **result);   /* Output linked list */

void freeaddrinfo(struct addrinfo *result); /* Free linked list */

const char *gai_strerror(int errcode);     /* Return error msg */
```

- Given host and service, `getaddrinfo` returns result that points to a linked list of **addrinfo** structs, each of which points to a corresponding socket address struct, and which contains arguments for the sockets interface functions.
- **Helper functions:**
 - `freeaddrinfo` frees the entire linked list.
 - `gai_strerror` converts error code to an error message.

Linked List Returned by getaddrinfo

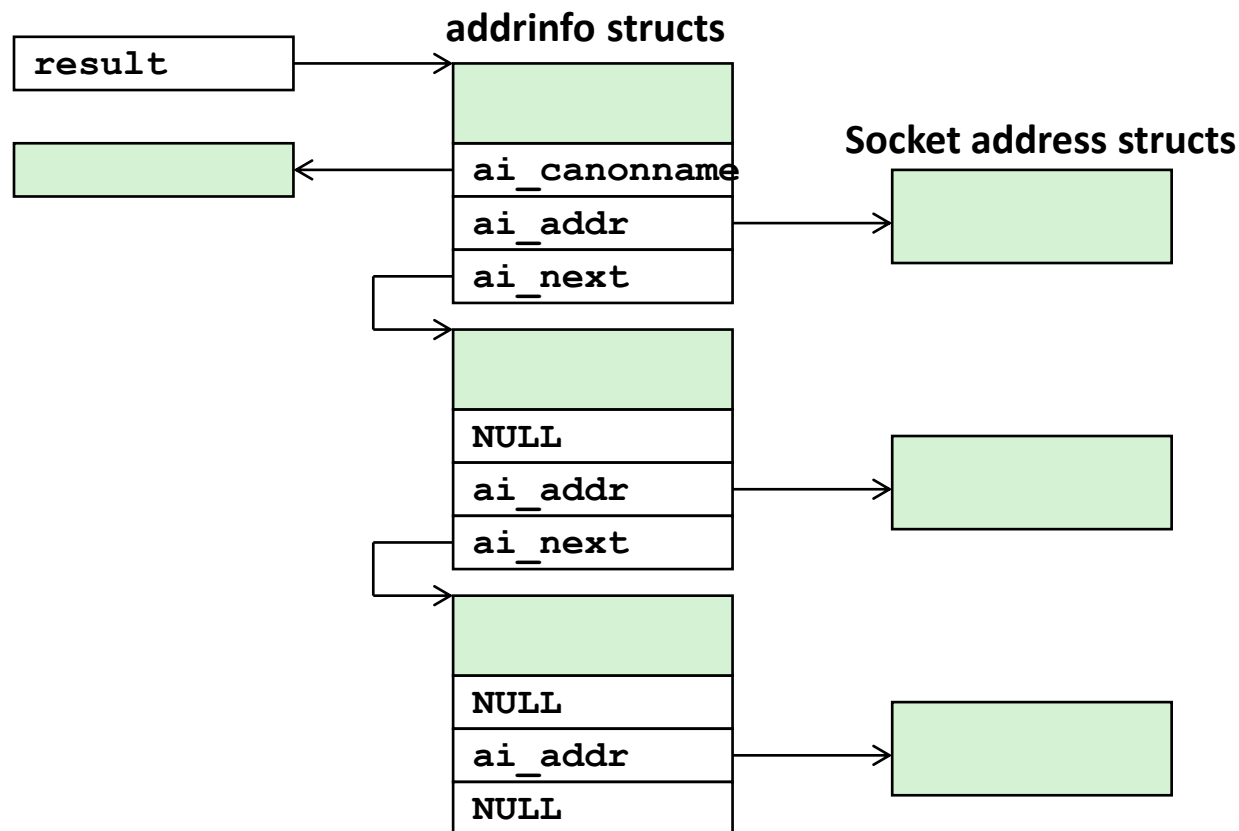

Running hostinfo

```
whaleshark> ./hostinfo localhost  
127.0.0.1
```

```
whaleshark> ./hostinfo whaleshark.ics.cs.cmu.edu  
128.2.210.175
```

```
whaleshark> ./hostinfo twitter.com  
199.16.156.230  
199.16.156.38  
199.16.156.102  
199.16.156.198
```

```
whaleshark> ./hostinfo google.com  
172.217.15.110  
2607:f8b0:4004:802::200e
```


Sockets Interface: `socket`

- Clients and servers use the `socket` function to create a *socket descriptor*:

```
int socket(int domain, int type, int protocol)
```

- Example:

```
int clientfd = socket(AF_INET, SOCK_STREAM, 0);
```

Protocol specific!

Indicates that we are using
32-bit IPV4 addresses


Indicates that the socket
will be the end point of a
reliable (TCP) connection

- Example:

```
int clientfd = socket(ai->ai_family, ai->ai_socktype,  
                    ai->ai_protocol);
```

*Use `getaddrinfo` and you don't have
to know or care which protocol!*

Sockets Interface

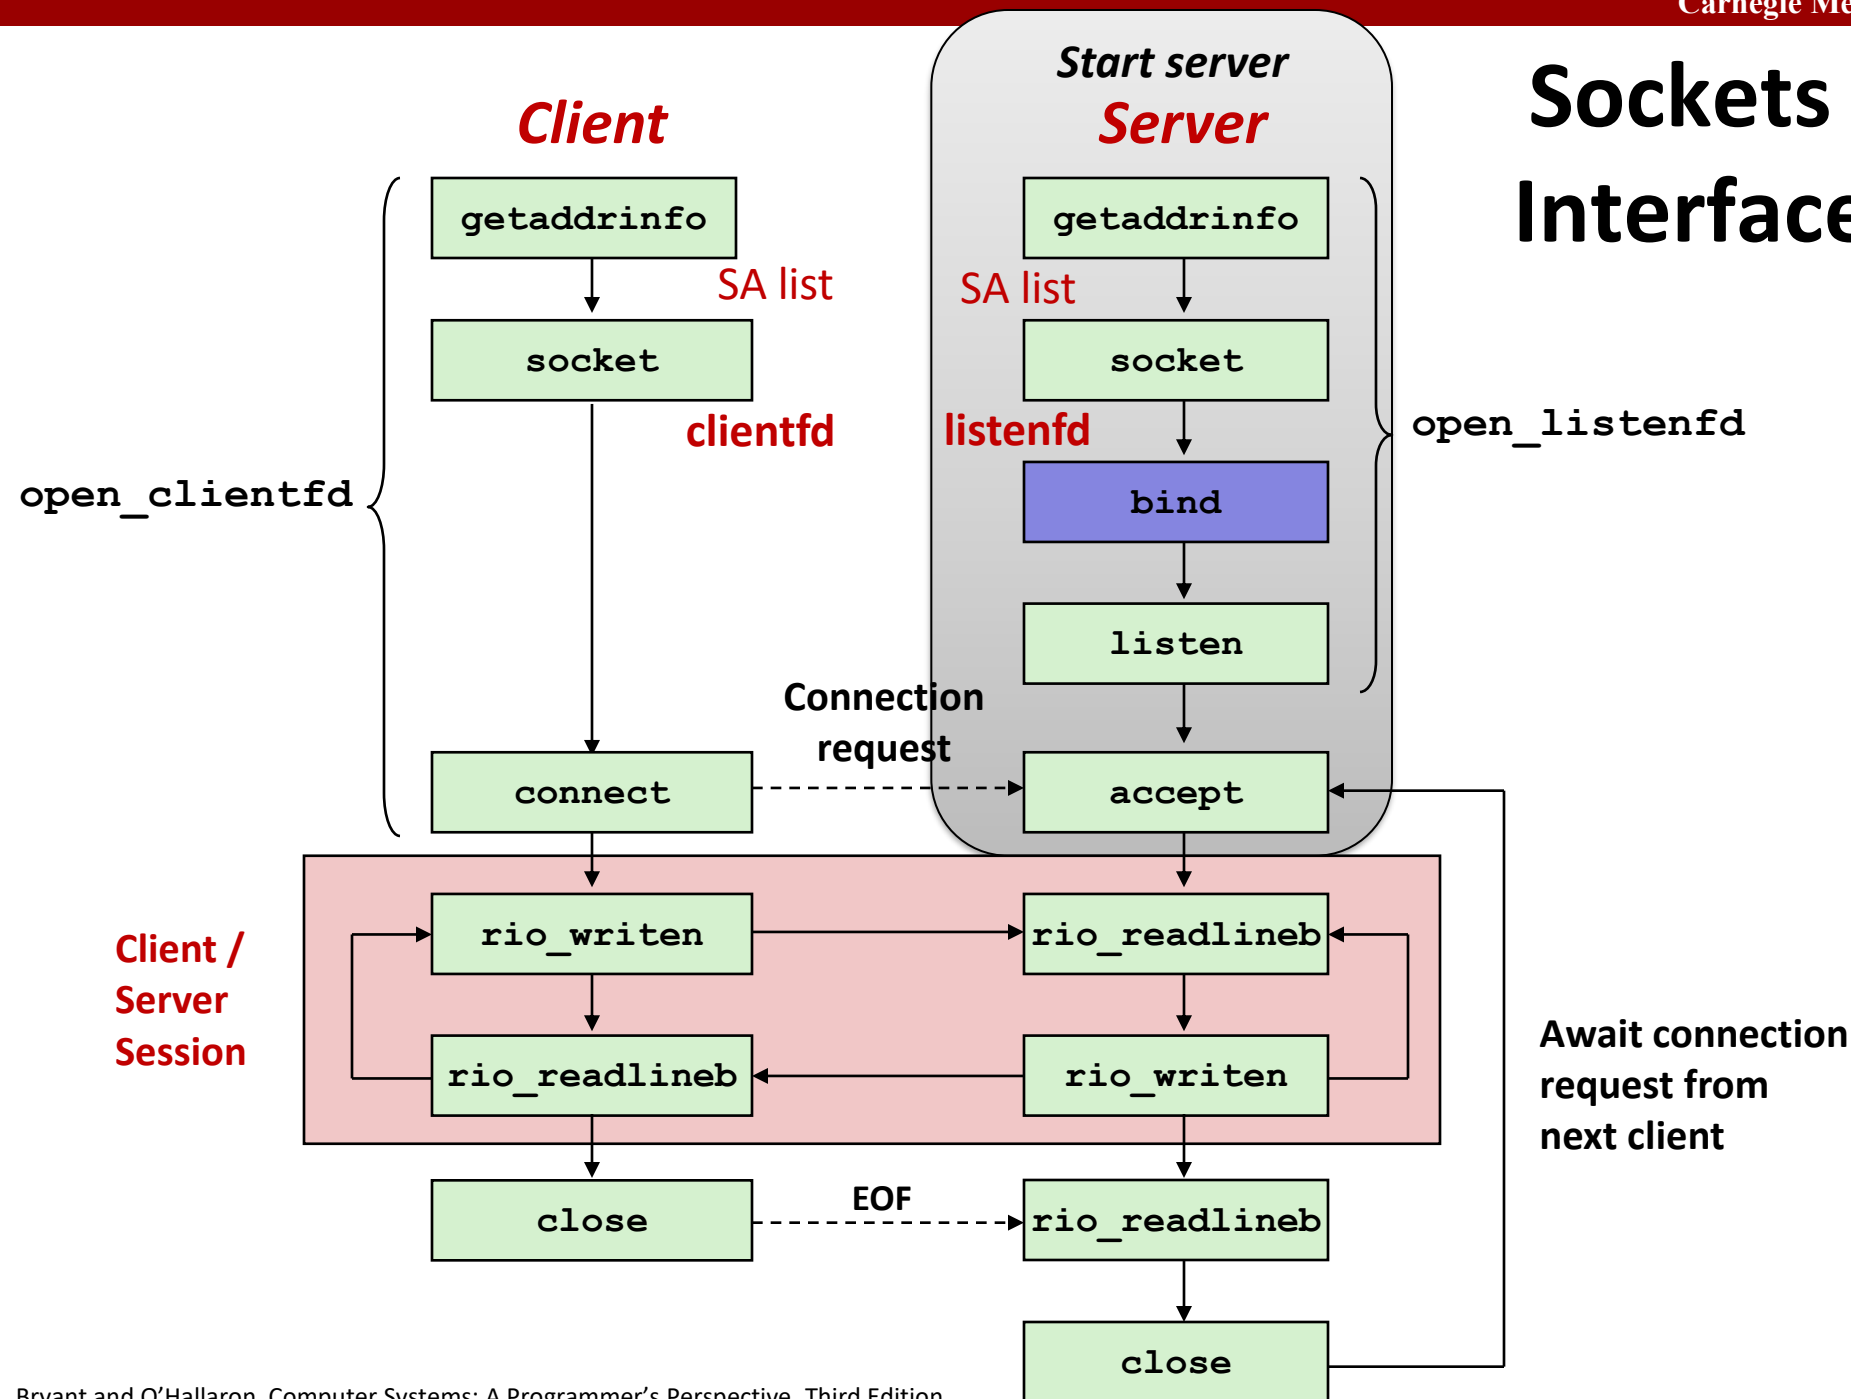

Sockets Interface: `bind`


- A server uses `bind` to ask the kernel to associate the server's socket address with a socket descriptor:

```
int bind(int sockfd, SA *addr, socklen_t addrlen);
```

Our convention: `typedef struct sockaddr SA;`

- Process can read bytes that arrive on the connection whose endpoint is `addr` by reading from descriptor `sockfd`
- Similarly, writes to `sockfd` are transferred along connection whose endpoint is `addr`
- Best practice is to use `getaddrinfo` to supply the arguments `addr` and `addrlen`.

Sockets Interface

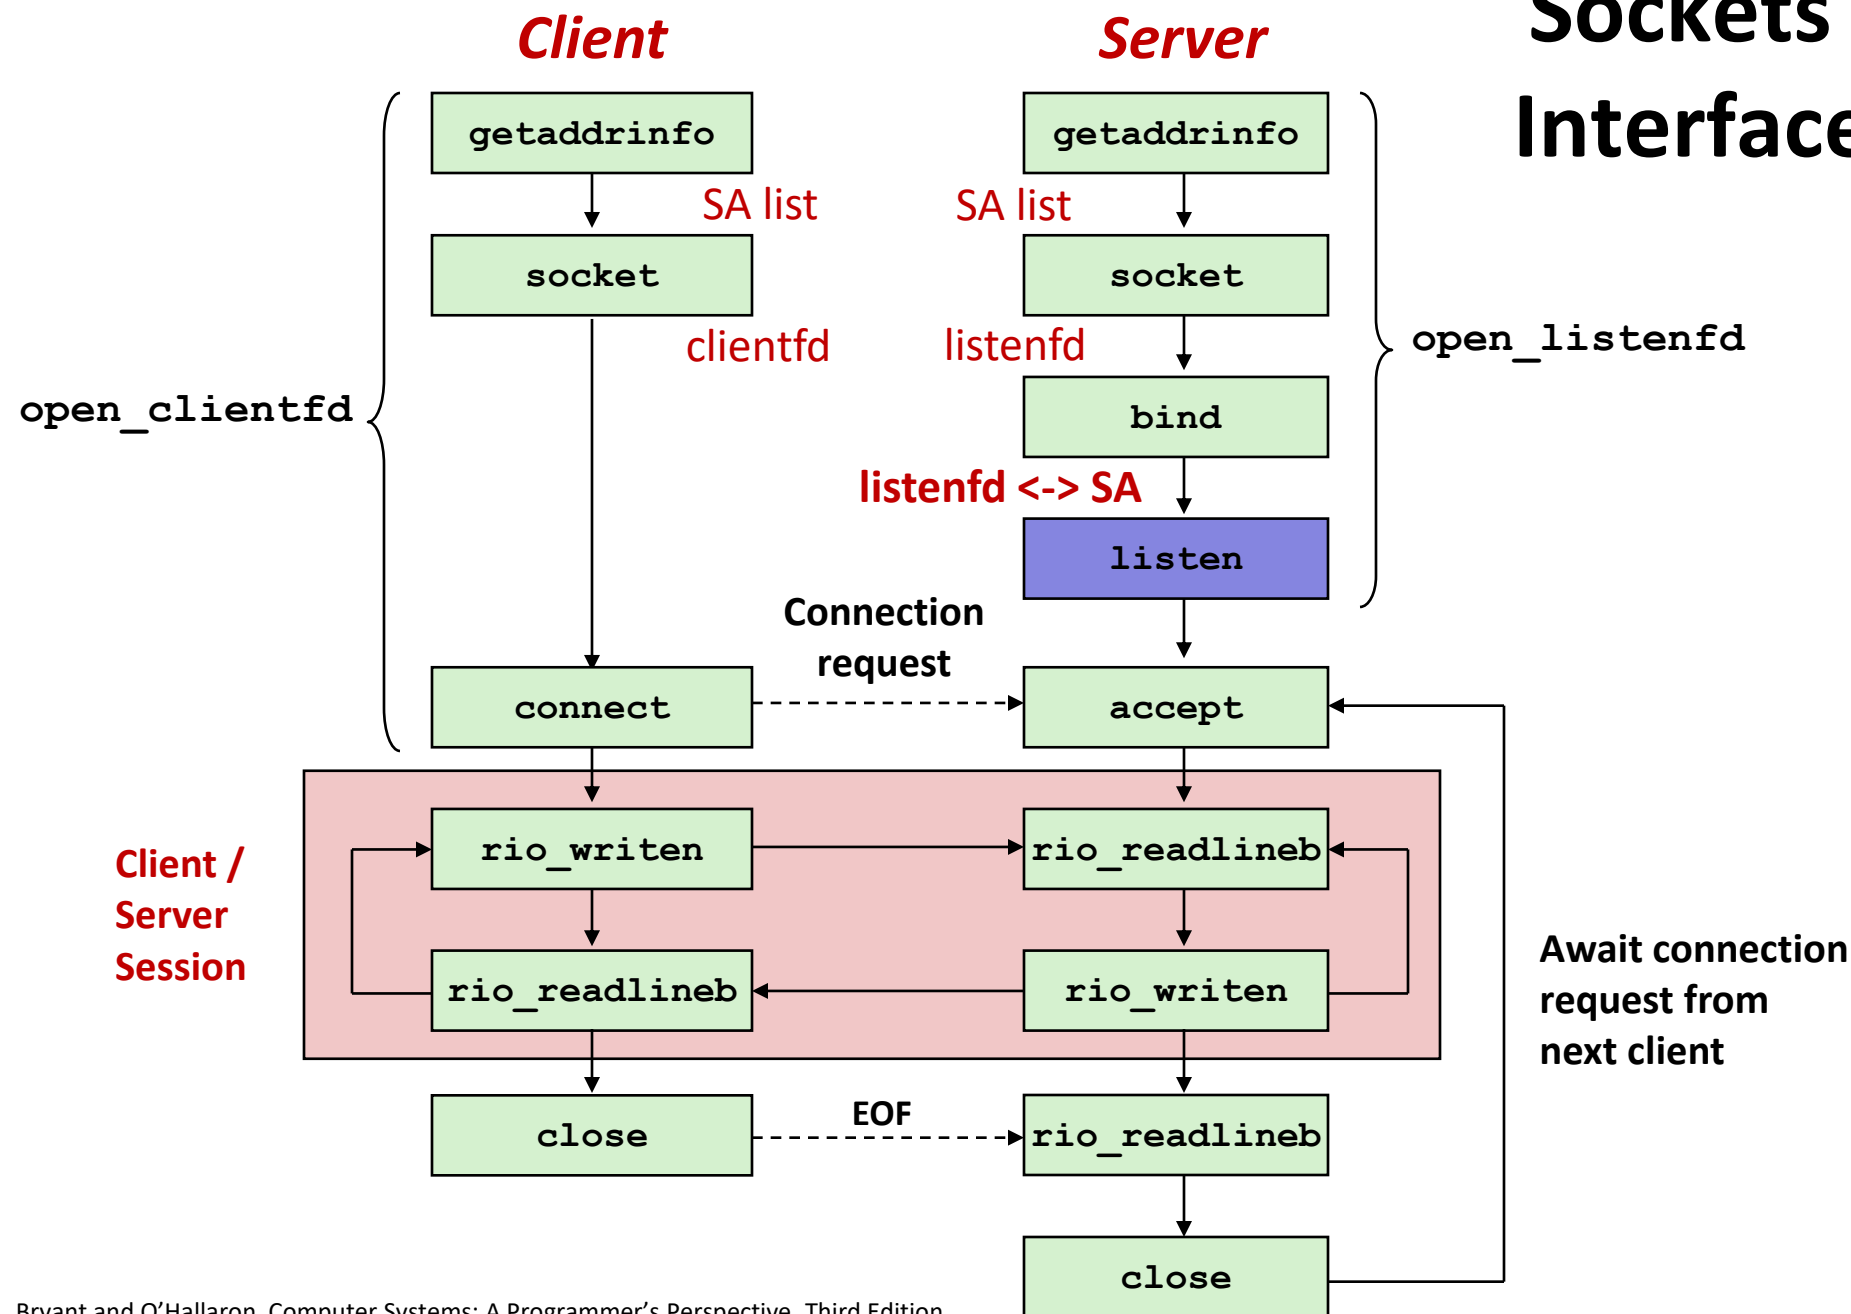


Sockets Interface: `listen`

- Kernel assumes that descriptor from `socket` function is an *active socket* that will be on the client end
- A server calls the `listen` function to tell the kernel that a descriptor will be used by a server rather than a client:

```
int listen(int sockfd, int backlog);
```

- Converts `sockfd` from an active socket to a *listening socket* that can accept connection requests from clients.
- `backlog` is a hint about the number of outstanding connection requests that the kernel should queue up before starting to refuse requests (128-ish by default)

Sockets Interface

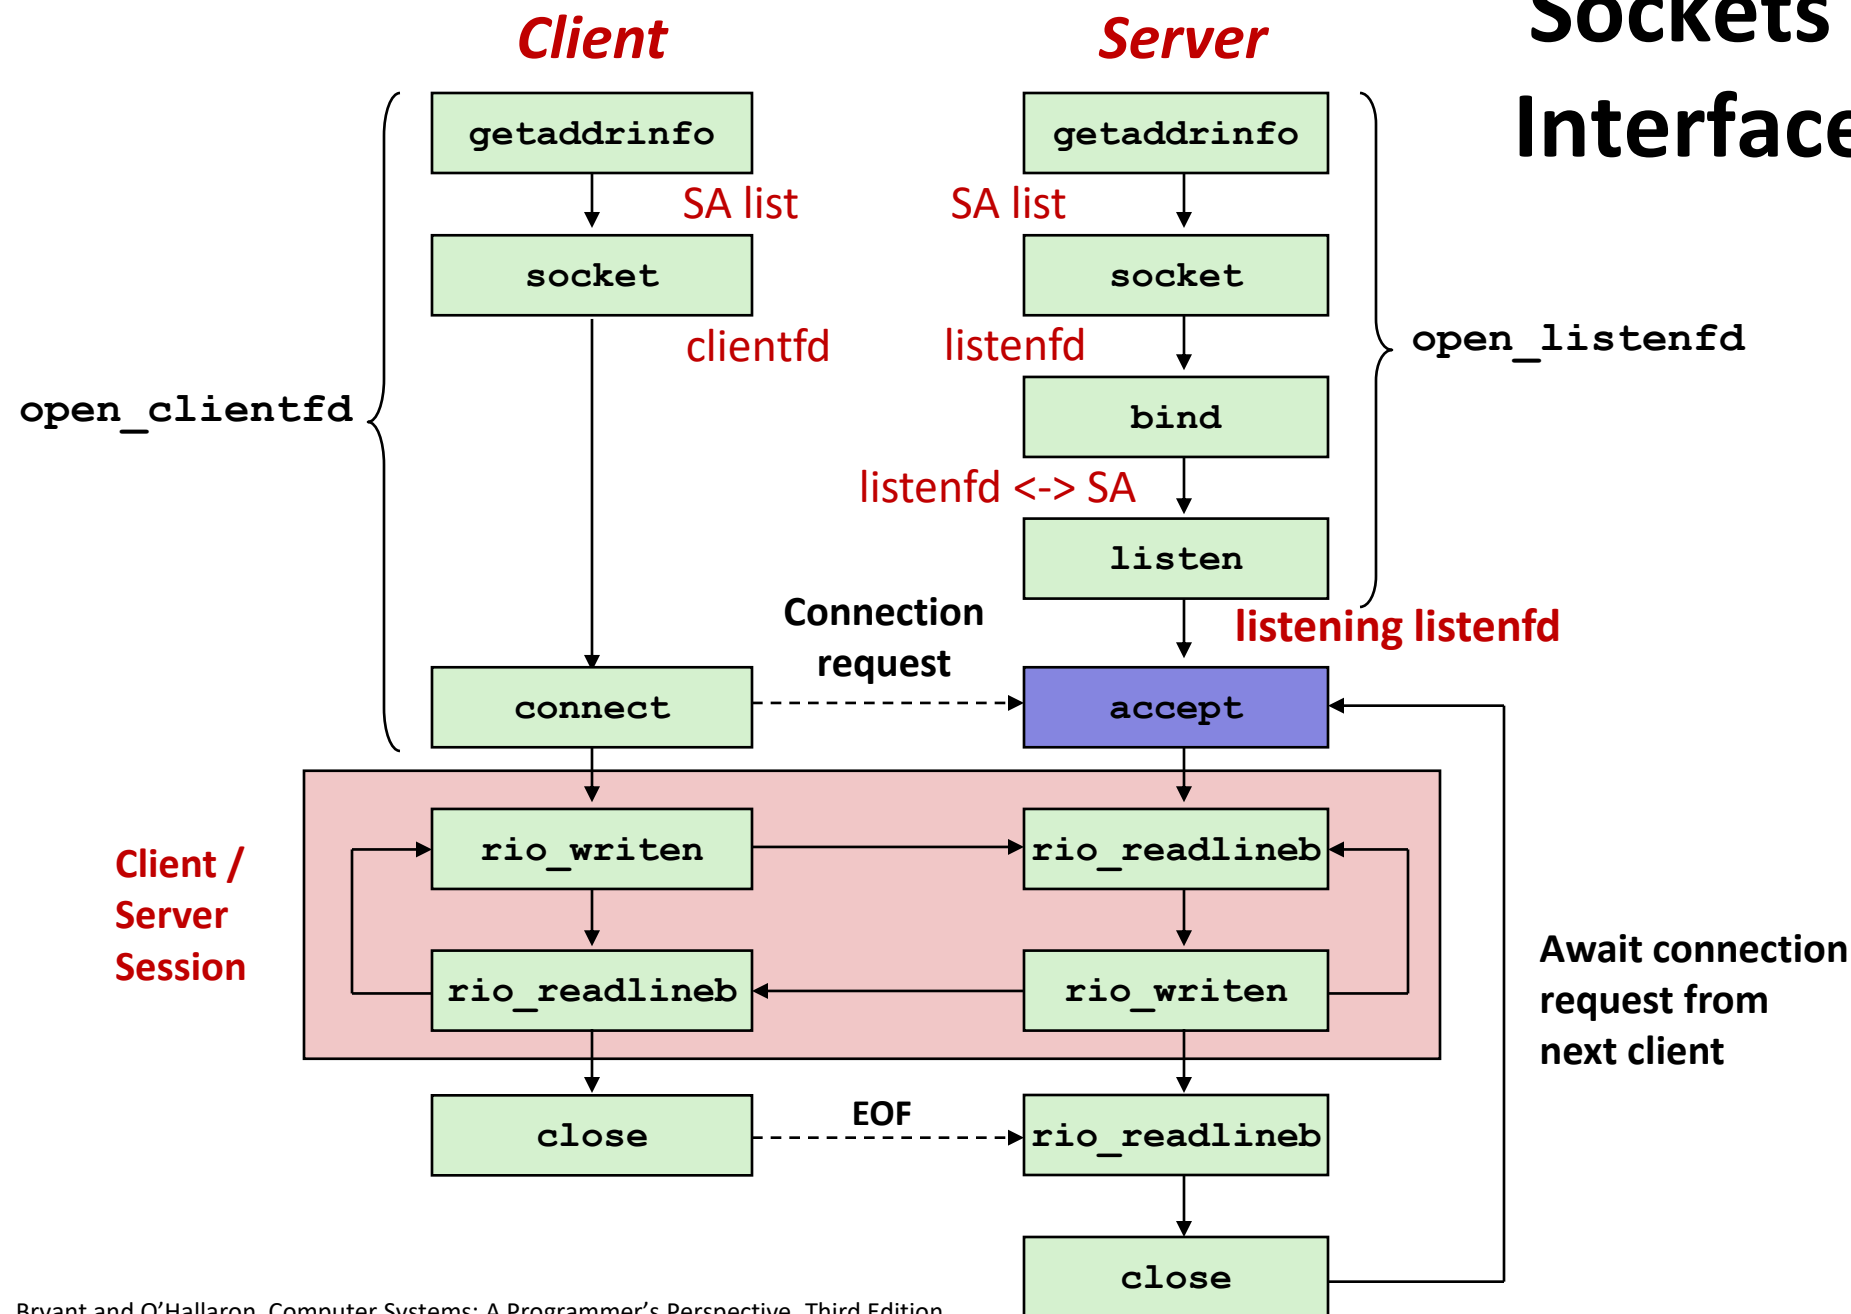


Sockets Interface: `accept`

- Servers wait for connection requests from clients by calling `accept`:

```
int accept(int listenfd, SA *addr, int *addrlen);
```

- Waits for connection request to arrive on the connection bound to `listenfd`, then fills in client's socket address in `addr` and size of the socket address in `addrlen`.
- Returns a *connected descriptor* `connfd` that can be used to communicate with the client via Unix I/O routines.

Sockets Interface

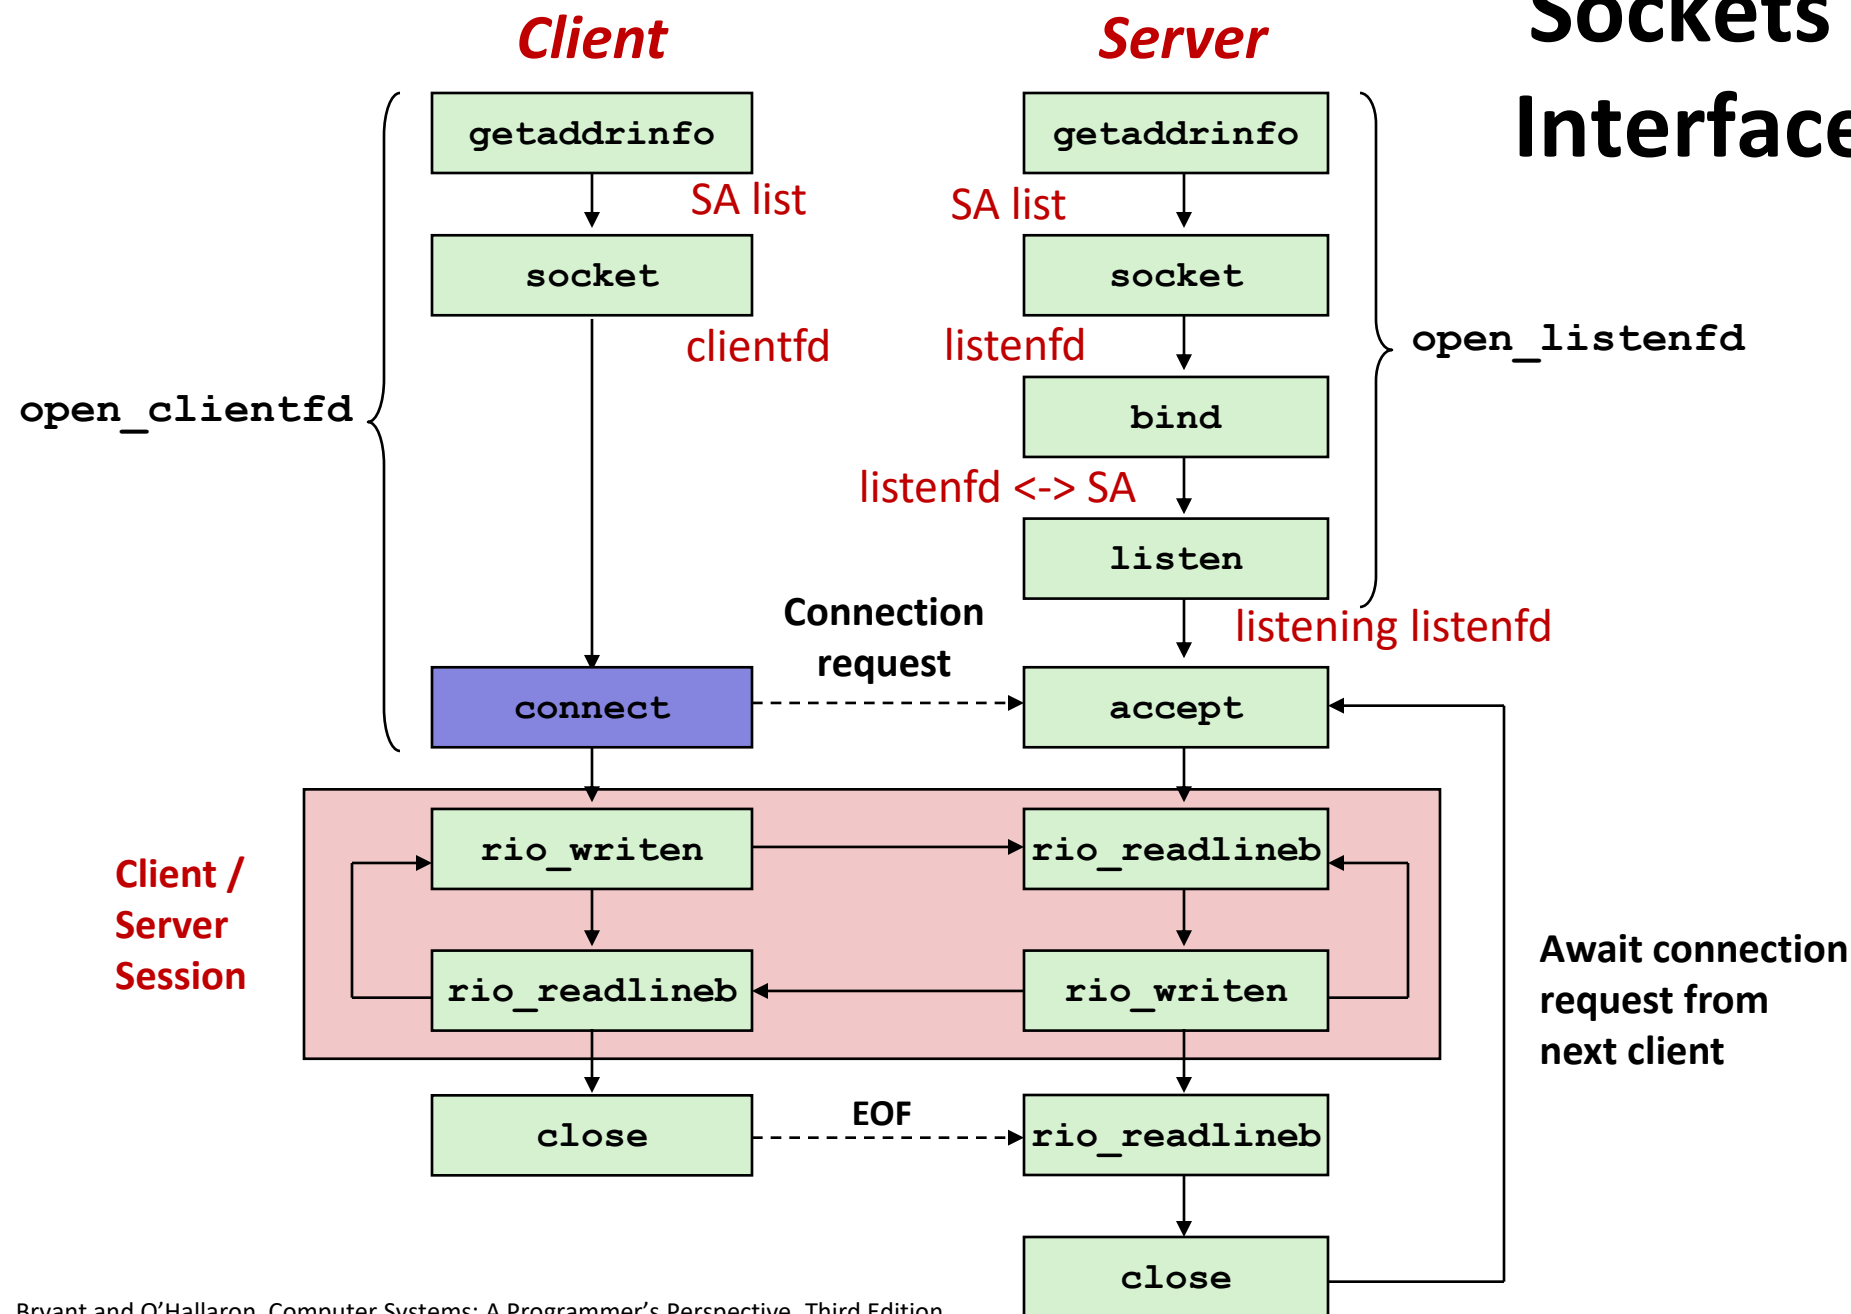

Sockets Interface: connect

- A client establishes a connection with a server by calling **connect**:


```
int connect(int clientfd, SA *addr, socklen_t addrlen);
```

- Attempts to establish a connection with server at socket address **addr**
 - If successful, then **clientfd** is now ready for reading and writing.
 - Resulting connection is characterized by socket pair
(**x:y**, **addr.sin_addr:addr.sin_port**)
 - **x** is client address
 - **y** is ephemeral port that uniquely identifies client process on client host
- Best practice is to use **getaddrinfo** to supply the arguments **addr** and **addrlen**.


connect/accept Illustrated



1. Server blocks in accept, waiting for connection request on listening descriptor `listenfd`

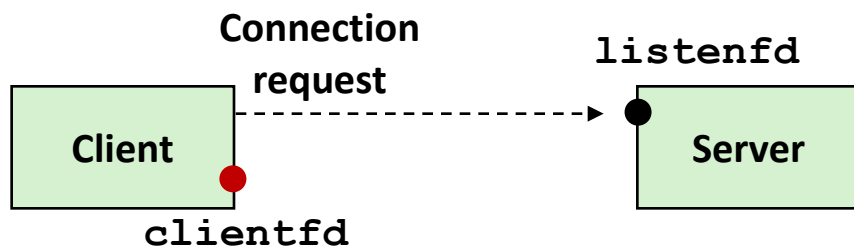

2. Client makes connection request by calling and blocking in `connect`

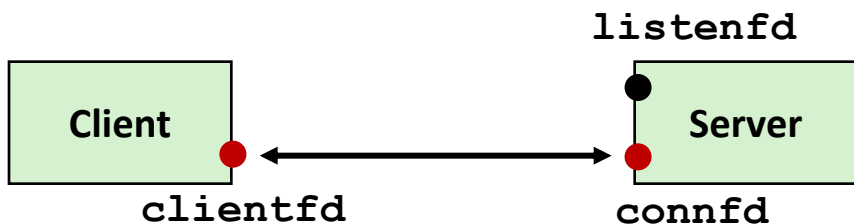

3. Server returns `connfd` from `accept`. Client returns from `connect`. Connection is now established between `clientfd` and `connfd`

Connected vs. Listening Descriptors

■ Listening descriptor


- End point for client connection requests
- Created once and exists for lifetime of the server

■ Connected descriptor

- End point of the connection between client and server
- A new descriptor is created each time the server accepts a connection request from a client
- Exists only as long as it takes to service client

■ Why the distinction?

- Allows for concurrent servers that can communicate over many client connections simultaneously
 - E.g., Each time we receive a new request, we fork a child to handle the request


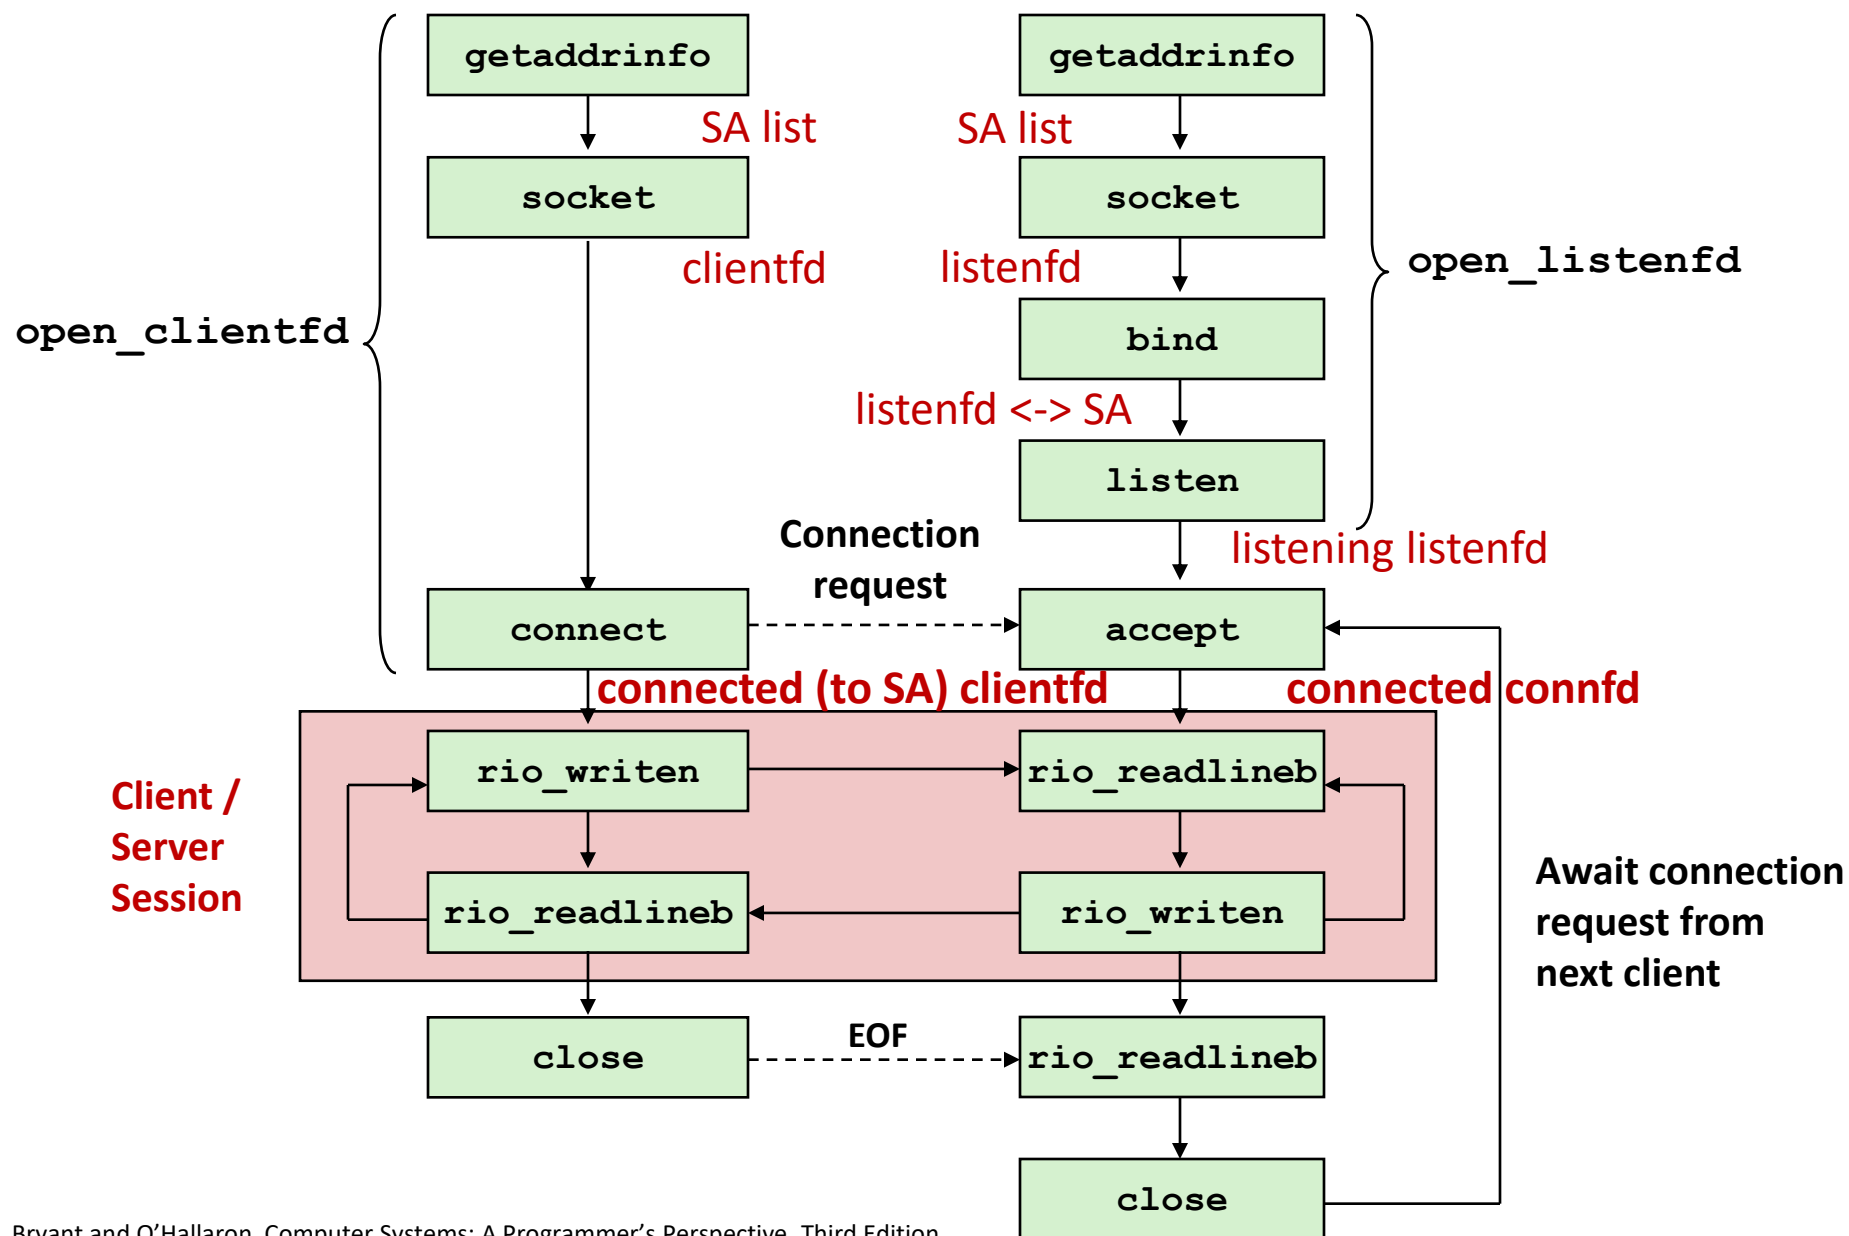
Client**Server**

Outline

- **Network types and structures**
- **Locating a host**
- **Setting up a connection**
- **HTTP Example**

Web Server Basics

- **Clients and servers communicate using the HyperText Transfer Protocol (HTTP)**
 - Client and server establish TCP connection
 - Client requests content
 - Server responds with requested content
 - Client and server close connection (eventually)
- **Current version is HTTP/2.0 but HTTP/1.1 widely used still**
 - RFC 2616, June, 1999.

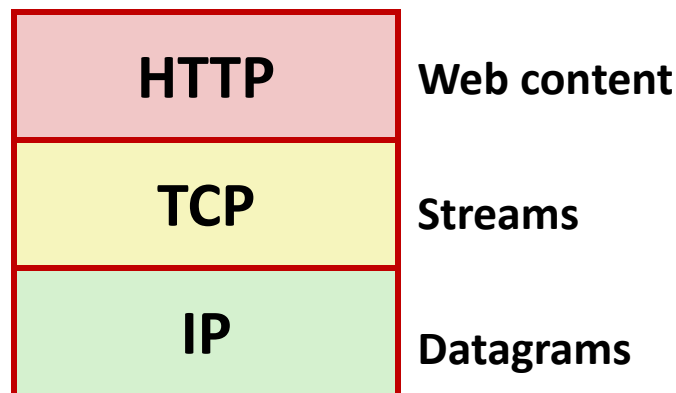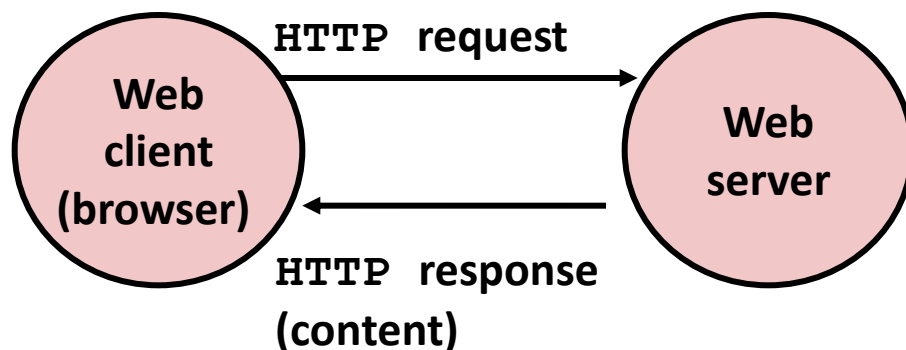

`http://www.w3.org/Protocols/rfc2616/rfc2616.html`

Web Content

■ Web servers return *content* to clients

- *content*: a sequence of bytes with an associated MIME (Multipurpose Internet Mail Extensions) type

■ Example MIME types

- | | |
|---------------------------|-------------------------------------|
| ■ <code>text/html</code> | HTML document |
| ■ <code>text/plain</code> | Unformatted text |
| ■ <code>image/gif</code> | Binary image encoded in GIF format |
| ■ <code>image/png</code> | Binary image encoded in PNG format |
| ■ <code>image/jpeg</code> | Binary image encoded in JPEG format |

You can find the complete list of MIME types at:

<http://www.iana.org/assignments/media-types/media-types.xhtml>

Static and Dynamic Content

- The content returned in HTTP responses can be either *static* or *dynamic*
 - *Static content*: content stored in files and retrieved in response to an HTTP request
 - Examples: HTML files, images, audio clips, Javascript programs
 - Request identifies which content file
 - *Dynamic content*: content produced on-the-fly in response to an HTTP request
 - Example: content produced by a program executed by the server on behalf of the client
 - Request identifies file containing executable code
- ***Web content associated with a file that is managed by the server***

URLs and how clients and servers use them

- Unique name for a file: URL (Universal Resource Locator)
- Example URL: `http://www.cmu.edu:80/index.html`
- Clients use *prefix* (`http://www.cmu.edu:80`) to infer:
 - What kind (protocol) of server to contact (HTTP)
 - Where the server is (`www.cmu.edu`)
 - What port it is listening on (80)
- Servers use *suffix* (`/index.html`) to:
 - Determine if request is for static or dynamic content.
 - No hard and fast rules for this
 - One convention: executables reside in `cgi-bin` directory
 - Find file on file system
 - Initial “/” in suffix denotes home directory for requested content.
 - Minimal suffix is “/”, which server expands to configured default filename (usually, `index.html`)

HTTP Request Example

GET / HTTP/1.1

Host: www.cmu.edu

Client: request line

Client: required HTTP/1.1 header

Client: blank line terminates headers

- HTTP standard requires that each text line end with `"\r\n"`
- Blank line (`"\r\n"`) terminates request and response headers

HTTP Requests

- HTTP request is a *request line*, followed by zero or more *request headers*
- Request line: `<method> <uri> <version>`
 - `<method>` is one of GET, POST, OPTIONS, HEAD, PUT, DELETE, or TRACE
 - `<uri>` is typically URL for proxies, URL suffix for servers
 - A URL is a type of URI (Uniform Resource Identifier)
 - See <http://www.ietf.org/rfc/rfc2396.txt>
 - `<version>` is HTTP version of request (HTTP/1.0 or HTTP/1.1)
- Request headers: `<header name>: <header data>`
 - Provide additional information to the server

HTTP Responses

- HTTP response is a *response line* followed by zero or more *response headers*, possibly followed by *content*, with blank line (“\r\n”) separating headers from content.
- Response line:
`<version> <status code> <status msg>`
 - <version> is HTTP version of the response
 - <status code> is numeric status
 - <status msg> is corresponding English text
 - 200 OK Request was handled without error
 - 301 Moved Provide alternate URL
 - 404 Not found Server couldn't find the file
- Response headers: `<header name>: <header data>`
 - Provide additional information about response
 - **Content-Type**: MIME type of content in response body
 - **Content-Length**: Length of content in response body

Example HTTP Transaction

whaleshark> telnet www.cmu.edu 80

Trying 128.2.42.52...

Connected to WWW-CMU-PROD-VIP.ANDREW.cmu.edu.

Escape character is '^['.

GET / HTTP/1.1

Host: www.cmu.edu

HTTP/1.1 **301 Moved Permanently**

Date: Wed, 05 Nov 2014 17:05:11 GMT

Server: Apache/1.3.42 (Unix)

Location: **http://www.cmu.edu/index.shtml**

Transfer-Encoding: chunked

Content-Type: text/html; charset=...

15c

<HTML><HEAD>

...

</BODY></HTML>

0

Connection closed by foreign host.

Client: open connection to server

Telnet prints 3 lines to terminal

Client: request line

Client: required HTTP/1.1 header

Client: blank line terminates headers

Server: response line

Server: followed by 5 response headers

Server: this is an Apache server

Server: page has moved here

Server: response body will be chunked

Server: expect HTML in response body

Server: empty line terminates headers

Server: first line in response body

Server: start of HTML content

Server: end of HTML content

Server: last line in response body

Server: closes connection

- HTTP standard requires that each text line end with "`\r\n`"
- Blank line ("`\r\n`") terminates request and response headers

Example HTTP Transaction, Take 2

```

whaleshark> telnet www.cmu.edu 80
Trying 128.2.42.52...
Connected to WWW-CMU-PROD-VIP.ANDREW.cmu.edu.
Escape character is '^]'.
GET /index.shtml HTTP/1.1
Host: www.cmu.edu

HTTP/1.1 200 OK
Date: Wed, 05 Nov 2014 17:37:26 GMT
Server: Apache/1.3.42 (Unix)
Transfer-Encoding: chunked
Content-Type: text/html; charset=...

1000
<html ..>
...
</html>
0
Connection closed by foreign host.

```

Client: open connection to server
 Telnet prints 3 lines to terminal

Client: request line
 Client: required HTTP/1.1 header
 Client: blank line terminates headers
 Server: response line
 Server: followed by 4 response headers

Server: empty line terminates headers
 Server: begin response body
 Server: first line of HTML content

Server: end response body
 Server: close connection

Example HTTP(S) Transaction, Take 3

```
whaleshark> openssl s_client www.cs.cmu.edu:443
CONNECTED(00000005)
...
Certificate chain
...
-
Server certificate
-----BEGIN CERTIFICATE-----
MIIGDjCCBPagAwIBAgIRAMiF7LBPDoySilnNoU+mp+gwDQYJKoZIhvcNAQELBQAw
djELMAkGA1UEBhMCVVMxCzAJBgNVBAGTAk1JMRIwEAYDVQQHEwlBbm4gQXJib3Ix
EjAQBgNVBAoTCUluVGybmV0MjERMA8GA1UECzMISW5Db21tb24xHzAdBgNVBAMT
wkWkvDVBBCwKXrShVxQNsJ6J
...
-----END CERTIFICATE-----
subject=/C=US/postalCode=15213/ST=PA/L=Pittsburgh/street=5000 Forbes
Ave/O=Carnegie Mellon University/OU=School of Computer
Science/CN=www.cs.cmu.edu issuer=/C=US/ST=MI/L=Ann
Arbor/O=Internet2/OU=InCommon/CN=InCommon RSA Server CA
SSL handshake has read 6274 bytes and written 483 bytes
...
>GET / HTTP/1.0


HTTP/1.1 200 OK
Date: Tue, 12 Nov 2019 04:22:15 GMT
Server: Apache/2.4.10 (Ubuntu)
Set-Cookie: SHIBLOCATION=scsweb; path=/; domain=.cs.cmu.edu
... HTML Content Continues Below ...
```

TODO: What is a proxy?


Appendix



The ARPANET in December 1969

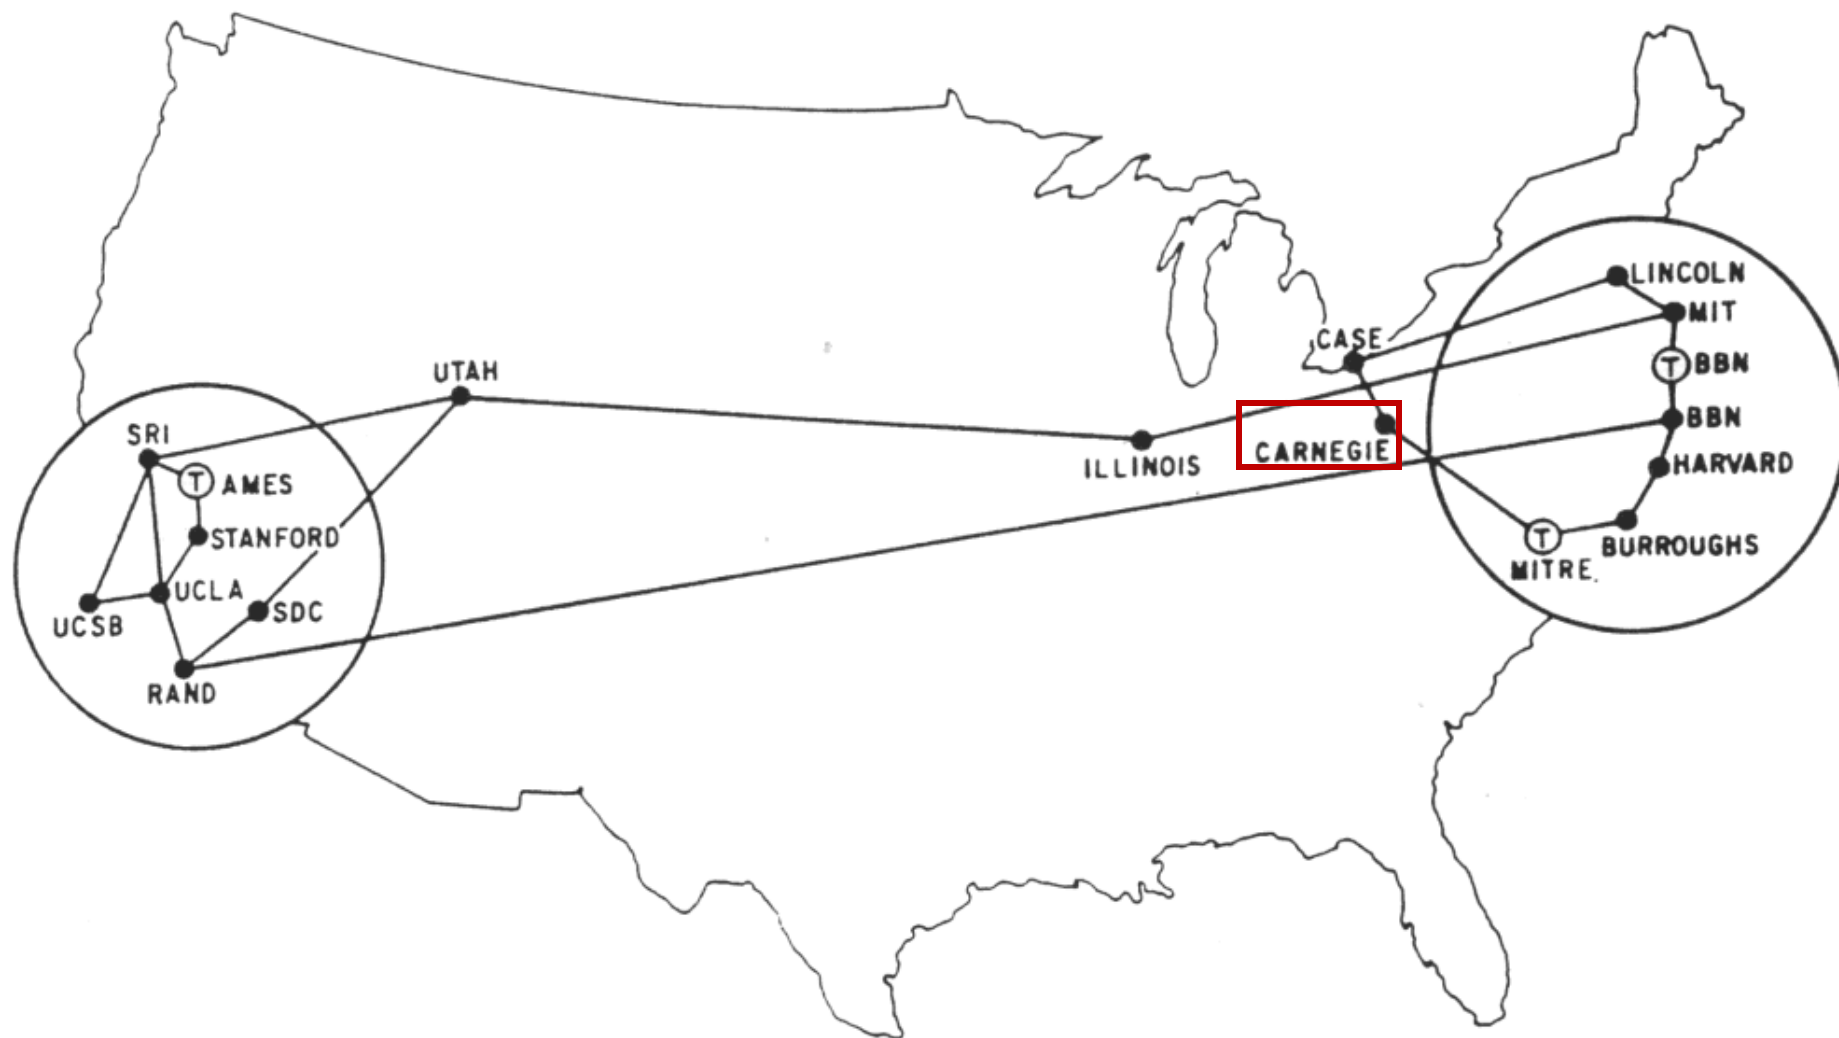


The ARPANET in December 1970

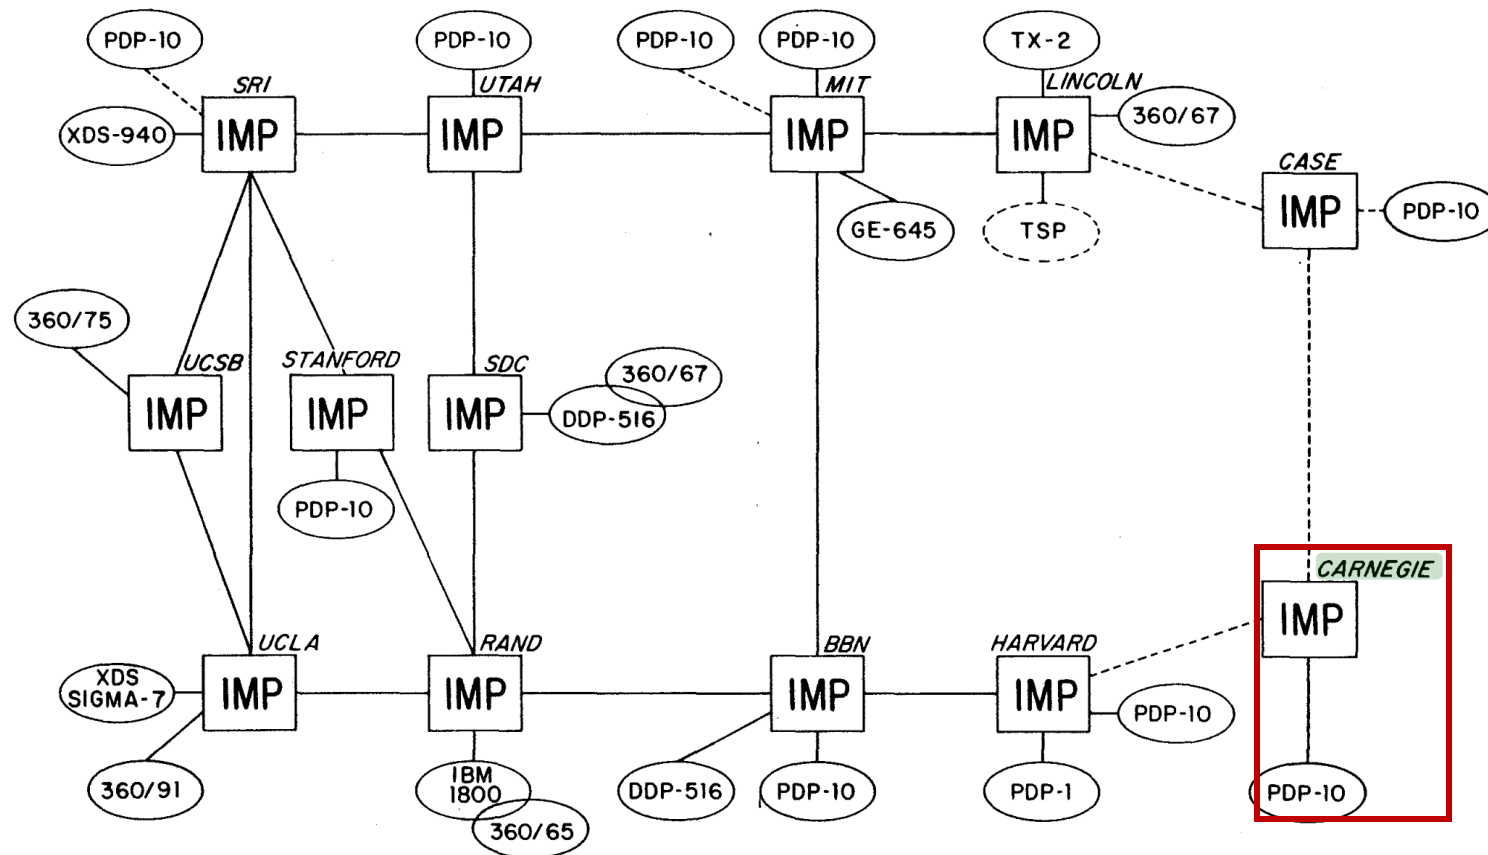


ARPA NET, DECEMBER 1970

ARPANET LOGICAL MAP, MARCH 1977

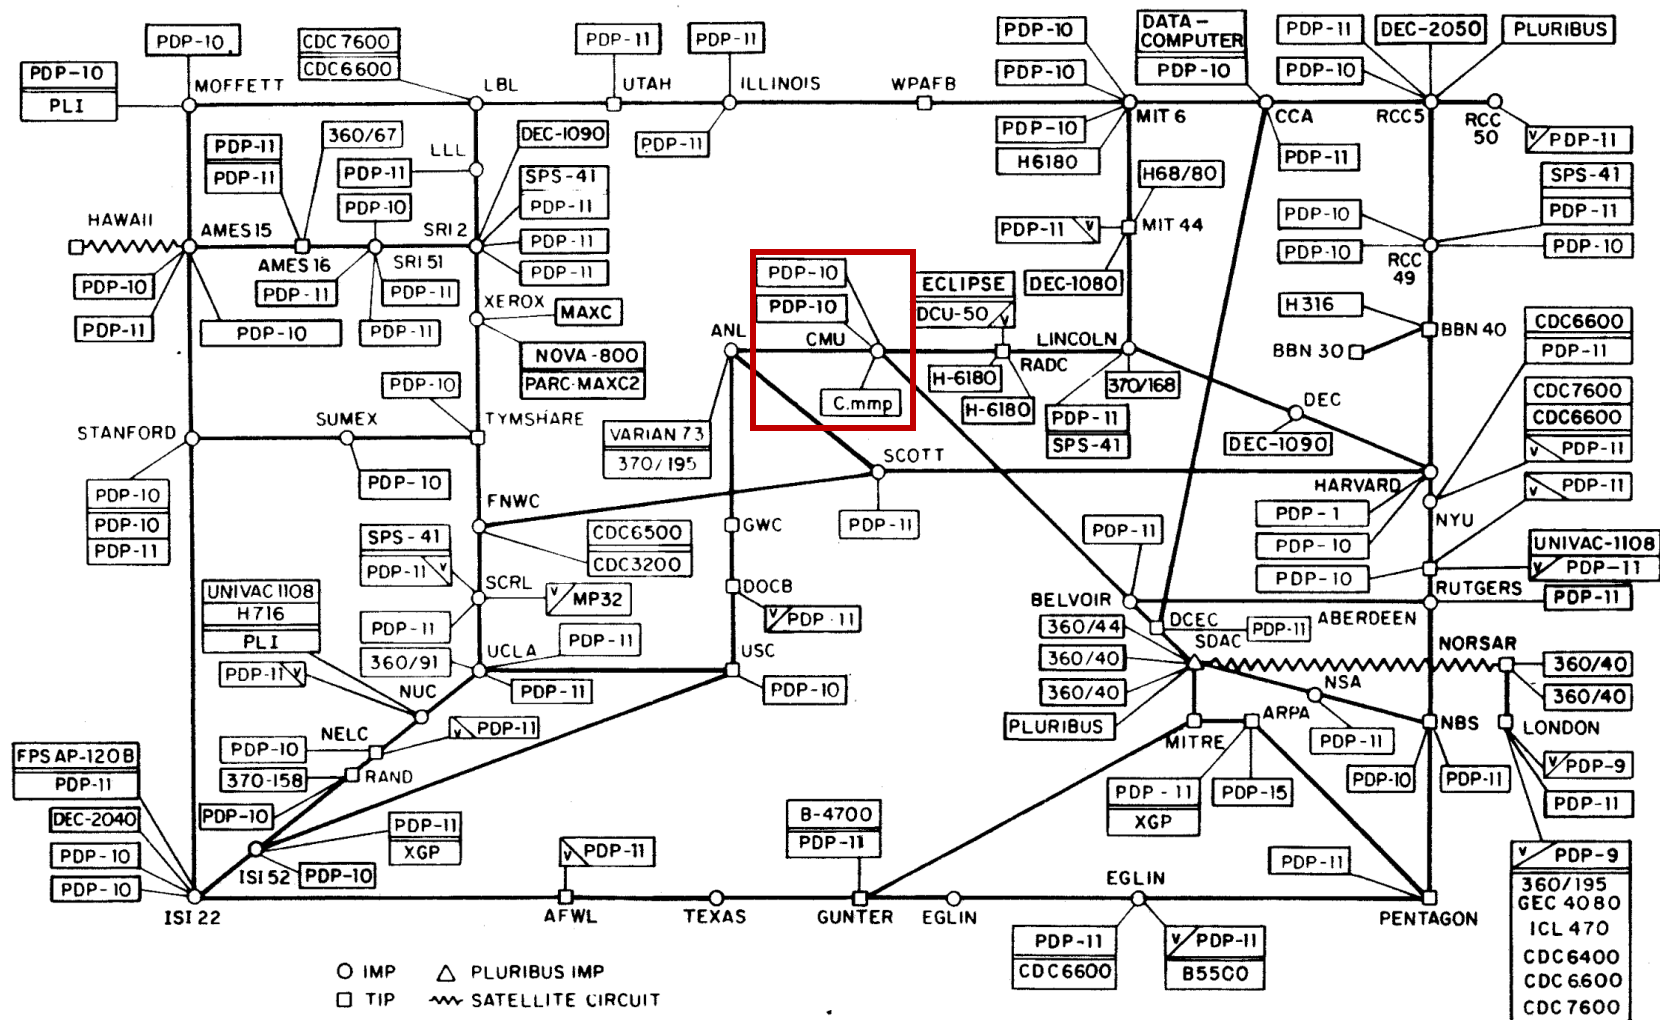


(PLEASE NOTE THAT WHILE THIS MAP SHOWS THE HOST POPULATION OF THE NETWORK ACCORDING TO THE BEST INFORMATION OBTAINABLE, NO CLAIM CAN BE MADE FOR ITS ACCURACY)

SUBMARINE CABLE MAP 2022

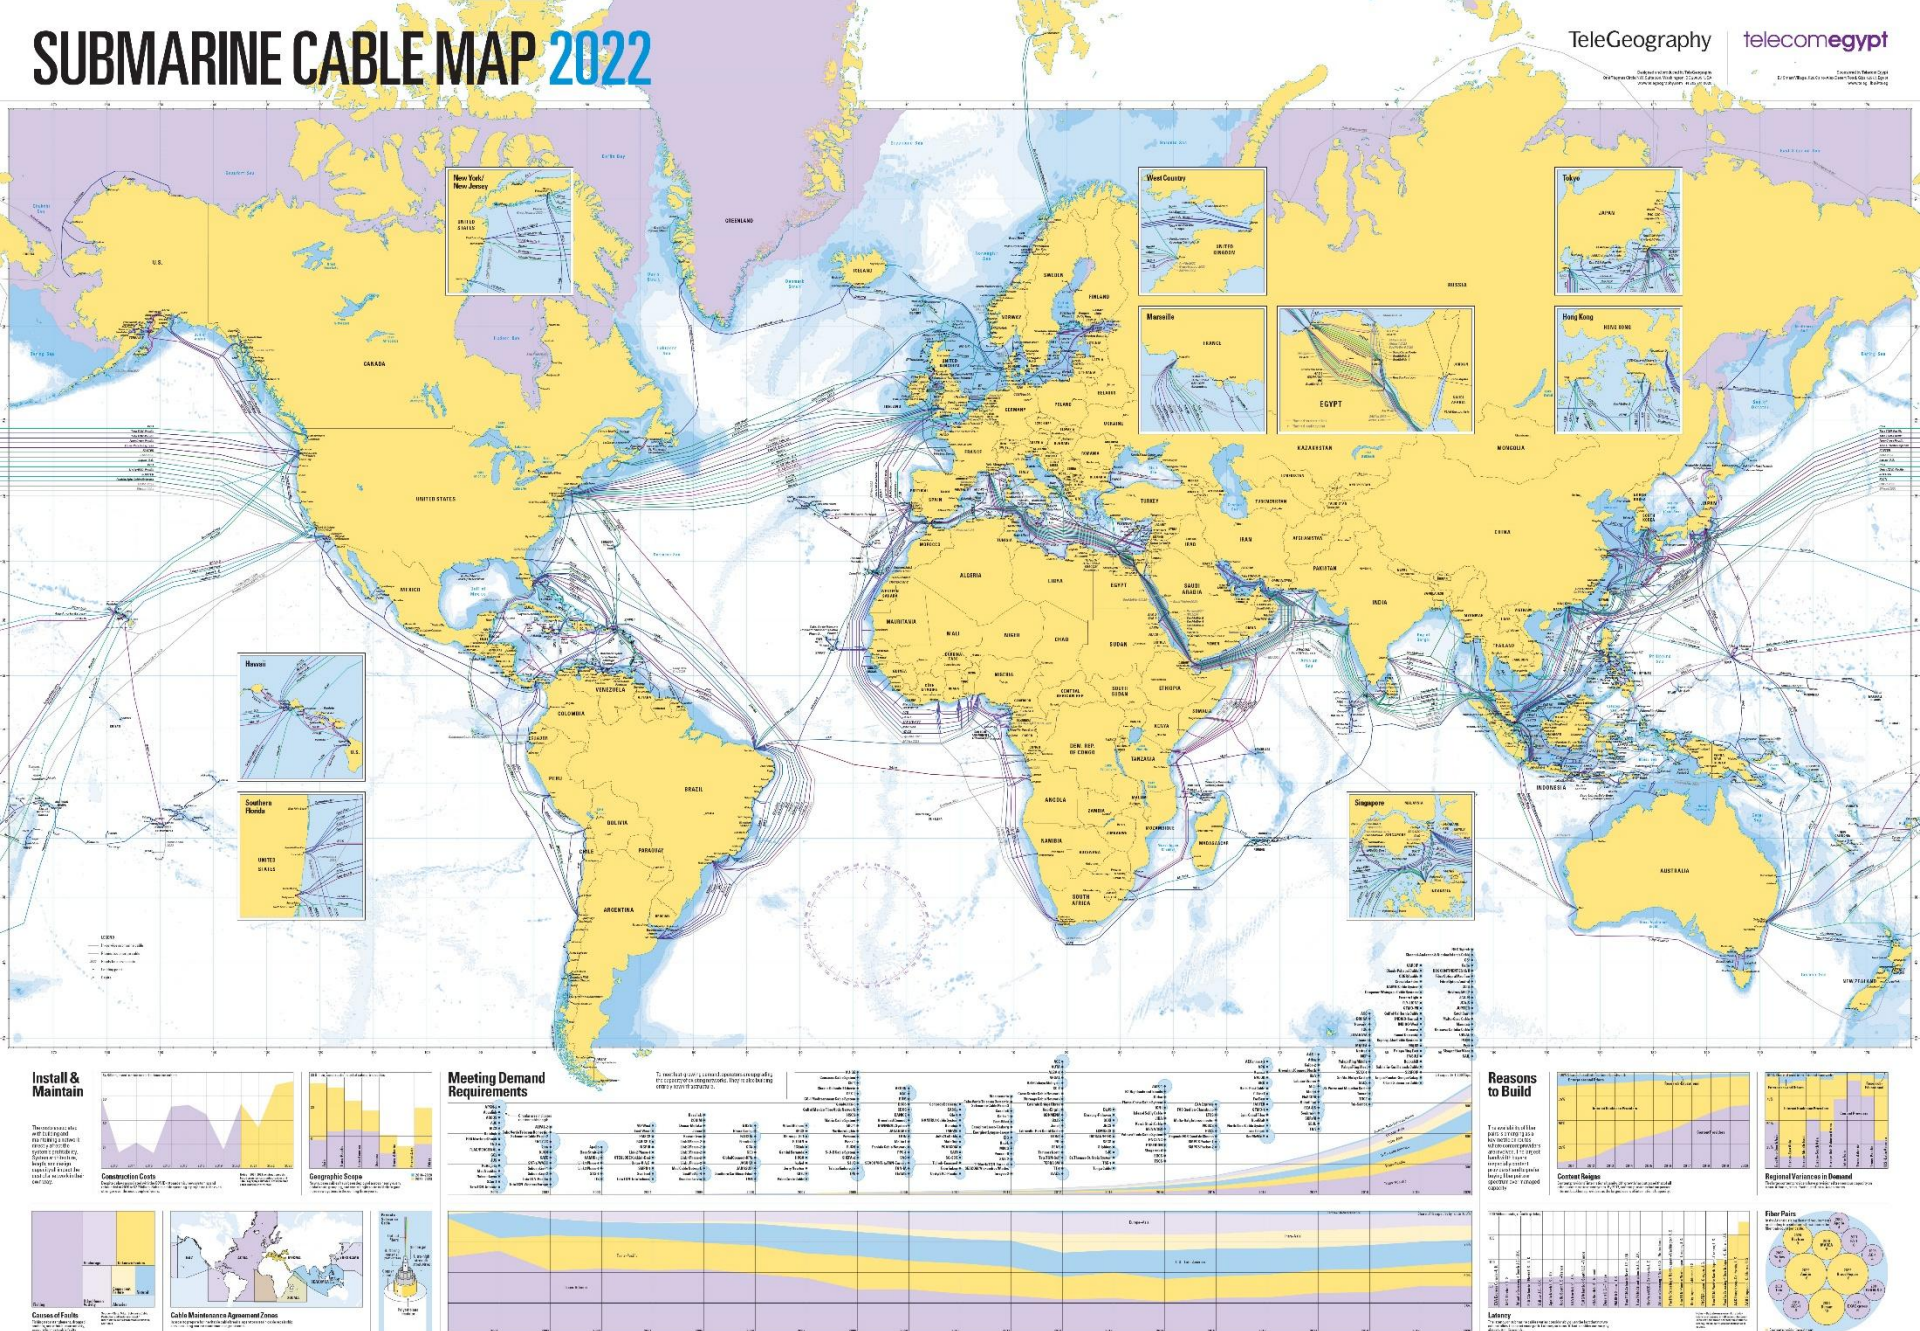

A Map of 460 Billion Device Connections to the Internet collected by the Carna Botnet

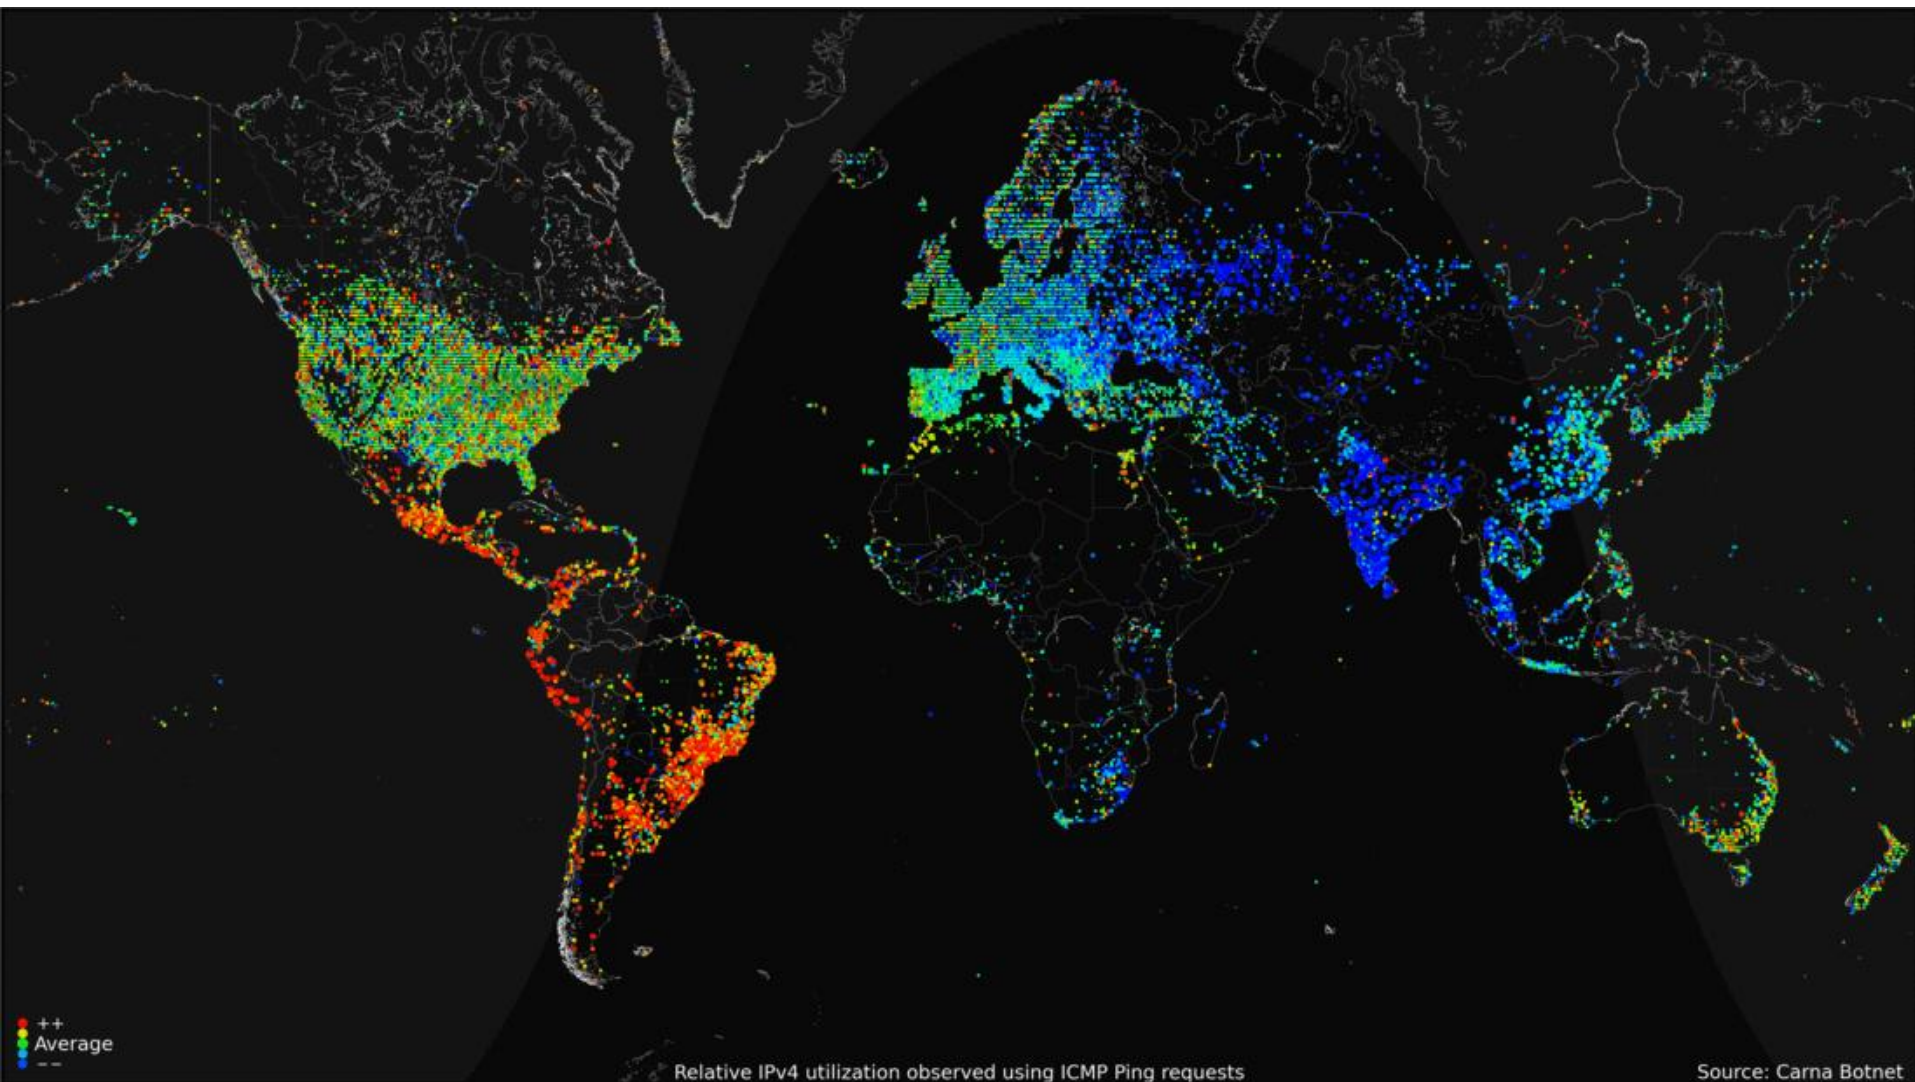

Basic Internet Components

■ Internet backbone:

- collection of routers (nationwide or worldwide) connected by high-speed point-to-point networks

■ Internet Exchange Points (IXP):

- router that connects multiple backbones (often referred to as peers)
- Also called Network Access Points (NAP)

■ Regional networks:

- smaller backbones that cover smaller geographical areas (e.g., cities or states)

■ Point of presence (POP):

- machine that is connected to the Internet

■ Internet Service Providers (ISPs):

- provide dial-up or direct access to POPs

Internet Connection Hierarchy

