

---

---

**18-452/750**

**Wireless Networks and Applications**

**Lecture 23:**

**Dynamic Spectrum Access**

**Peter Steenkiste**

**CSD and ECE, Carnegie Mellon University**

**Spring Semester 2020**

**<http://www.cs.cmu.edu/~prs/wirelessS20/>**

# Overview

---

- **Spectrum use background**
- **Concepts and approaches**
- **DSA technologies**
- **Case study: TV white spaces**
  
- **Some material based on slides by Ian Akyildiz, Raj Jain**

# Spectrum Availability

---

- **300 GHz is huge amount of spectrum!**
  - Spectrum can also be reused in space
- **Not quite that easy:**
  - Most of it is hard or expensive to use!
  - Noise and interference limits efficiency
  - Most of the spectrum is allocated by FCC
- **FCC controls who can use the spectrum and how it can be used.**
  - Need a license for most of the spectrum
  - Limits on power, placement of transmitters, coding, ...
  - Need to optimize benefit: guarantee emergency services, simplify communication, return on capital investment, ...
  - **National Telecommunications and Information Agency (NTIA) for federal government**


# Spectrum Allocation

---

<http://www.ntia.doc.gov/osmhome/allocchrt.html>

- Most bands are (statically) allocated
- Industrial, Scientific, and Medical (ISM) bands are “unlicensed”
  - But still subject to various constraints on the operator, e.g. 1 W output
  - 433-868 MHz (Europe)
  - 902-928 MHz (US)
  - 2.4000-2.4835 GHz
  - Unlicensed National Information Infrastructure (UNII) band is 5.725-5.875 GHz

# Spectrum Allocation in US

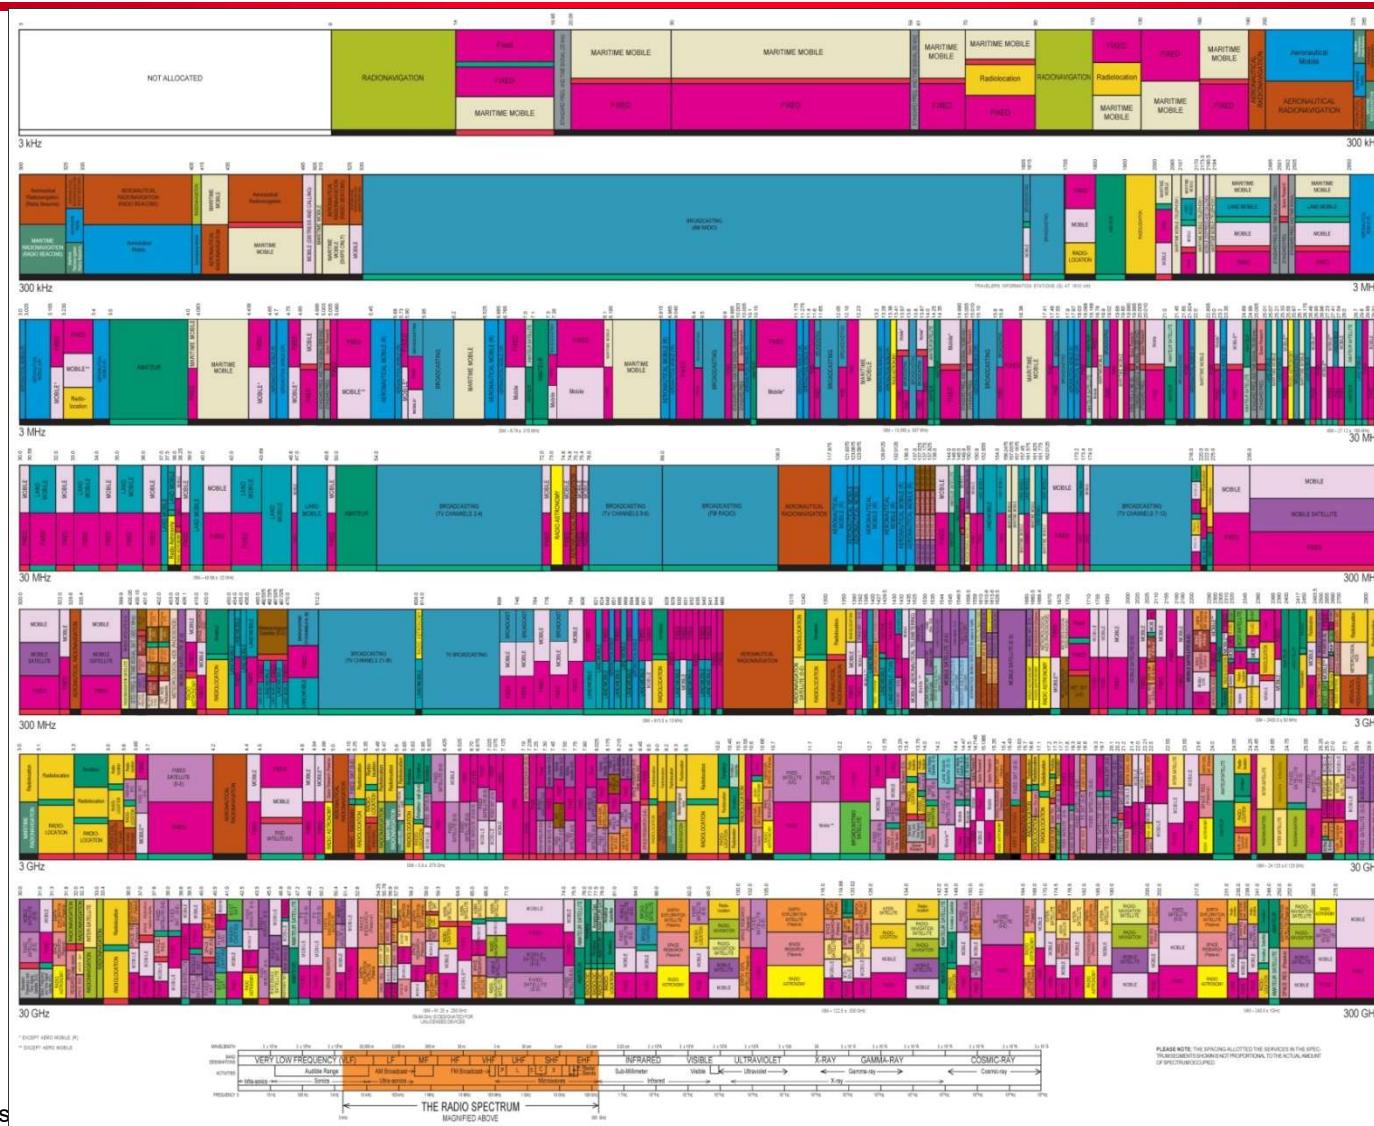

# Different Ways of Controlling Access to Bands

---

- **Licensed spectrum: users need a license to use the spectrum band**
  - Cellular, radio/TV broadcast, federal agencies, ...
  - License typically provides exclusive use, i.e. license holder has full control over use of spectrum band
  - Commercial entities often pay for the license, e.g. through an auction
- **Unlicensed spectrum: no user license required**
  - Various constraints are placed on the radio to improve coexistence between users
    - E.g. transmit power, modulation, MAC, ...
  - Devices must be licensed

# New Spectrum is Scarce

---


- Suppose you need to find X MHz for a new technology or service
- All easy to use frequencies have been allocated
- Difficult to reallocate existing bands for new uses
  - Need to move current users somewhere
  - Significant investment in infrastructure
- Exception: higher frequency bands that become viable because of technology advances

# But Allocated Spectrum is not Used Effectively


---

- **Many bands only used in certain regions**
  - E.g. big cities, airports, etc.
- **Some bands have low utilization or are only used at certain times**
  - Driven by events, seasonal, ..
  - Wrong predictions about demand and use
- **Some bands are used inefficiently**
  - Use outdated technology
  - Expensive to replace
- **Static allocation is fundamentally inefficient**
  - This is not an unusual problem!
  - But context is unique

# Examples of Low Utilization

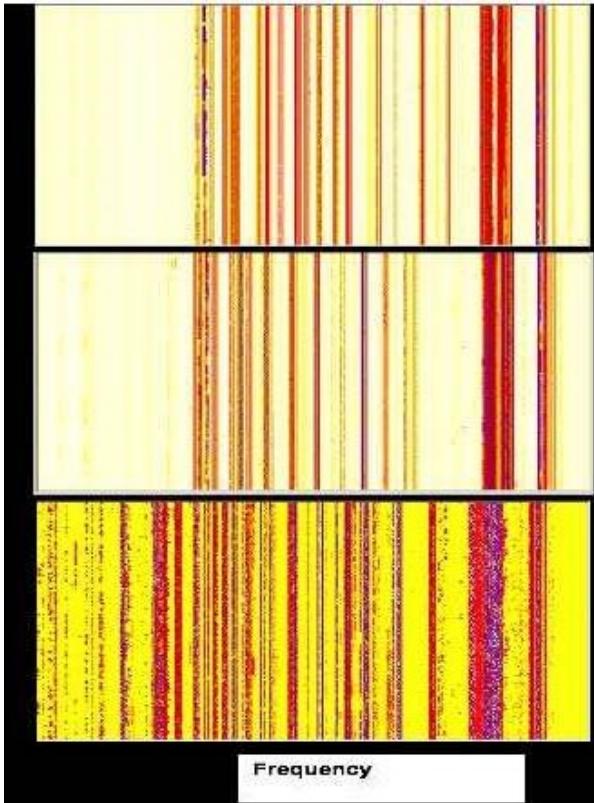

Snapshot of utilization of 700 MHz slice of spectrum below 1 GHz

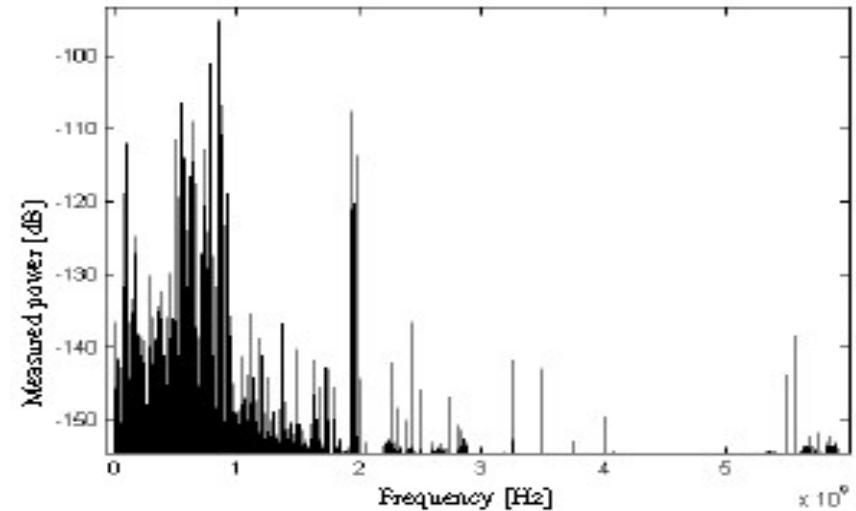

- Utilization of 0.5% in the 3-4 GHz
- 0.3% in 4-5 GHz

- According to FCC spatial and temporal utilization of assigned spectrum ranges from 15% to 85%

# Dynamic Spectrum Access

---

- **Make allocation “more dynamic”**
  - Can better adjust to allocation to needs
- **Main concern: avoid interference to “incumbents”**
  - Often have major investment in infrastructure
  - Interference can be fatal, e.g. first responders, businesses, ...
- **Many models are possible:**
  - License holder leases spectrum to third party
  - Allow secondary users that need to coexist with primary users – many models
- **DSA makes use of “cognitive radios”**
  - Radio parameters can be adapted at runtime based on its environments and goals
  - Can opportunistically operate in best available spectrum

# Overview


---

- **Spectrum use background**
- **Concepts and approaches**
- **DSA technologies**
- **Case study: TV white spaces**

# Dynamic Spectrum Access (DSA)

---

- Dynamic spectrum access allows different wireless users and different types of services to utilize radio spectrum

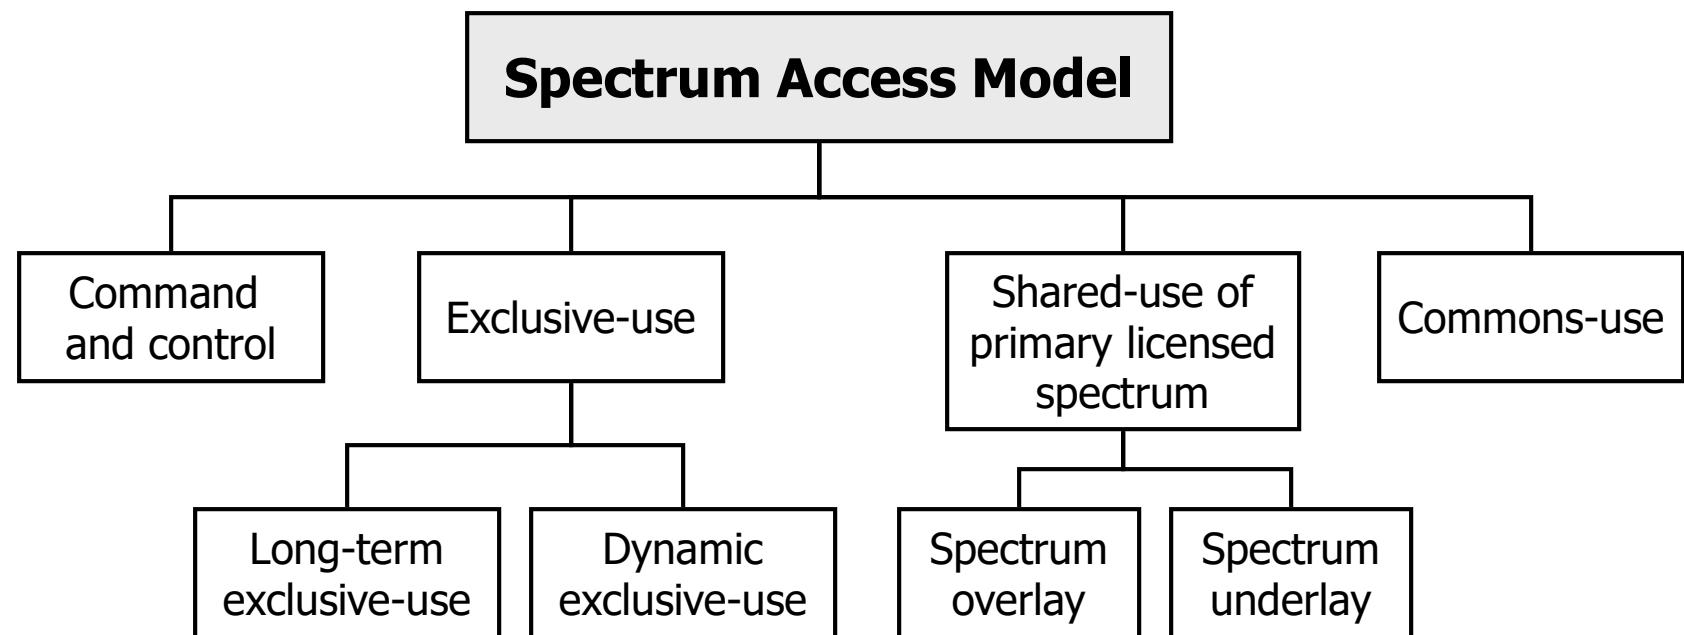



# Exclusive-Use Model

---

## Exclusively owned and used by single owner

- **Long-term exclusive-use**
  - E.g., cellular service licenses
  - Wireless technology can change (GSM, CDMA, OFDMA)
  - Owner and duration of license do not change
- **Dynamic exclusive-use (micro-licenses)**
  - Non-real-time secondary market
  - Multi-operator sharing homogeneous bands
    - dynamically change spatio-temporal allocation along with the amount of spectrum among multiple operators
    - different technology can be used
  - Multi-operator sharing heterogeneous services

# Shared Use of Primary Licensed Spectrum Model

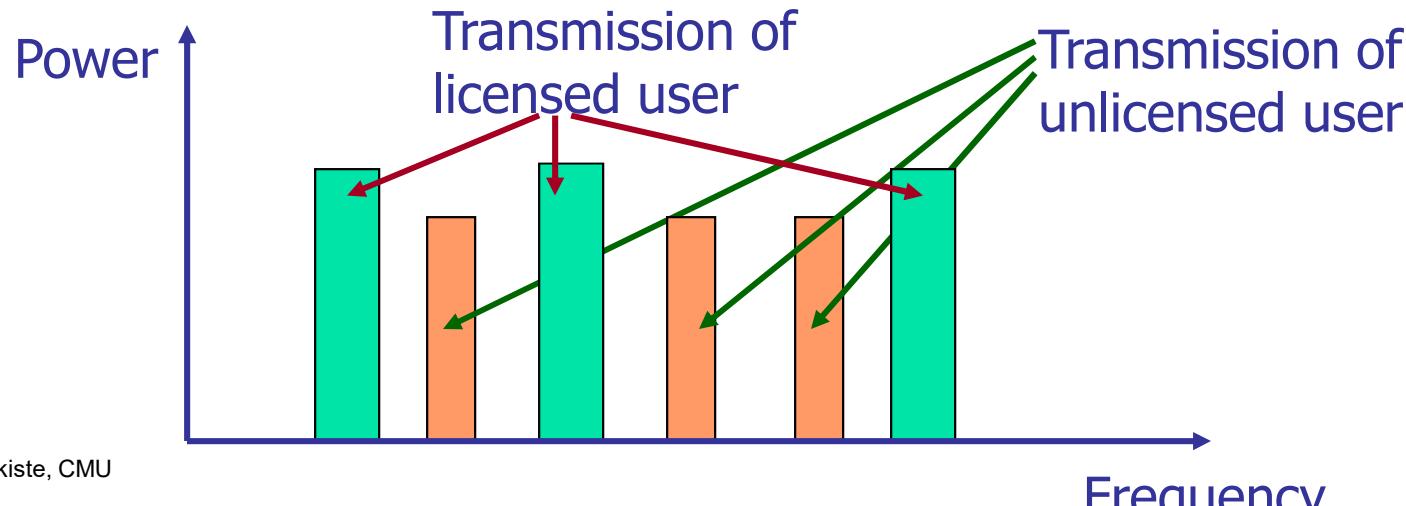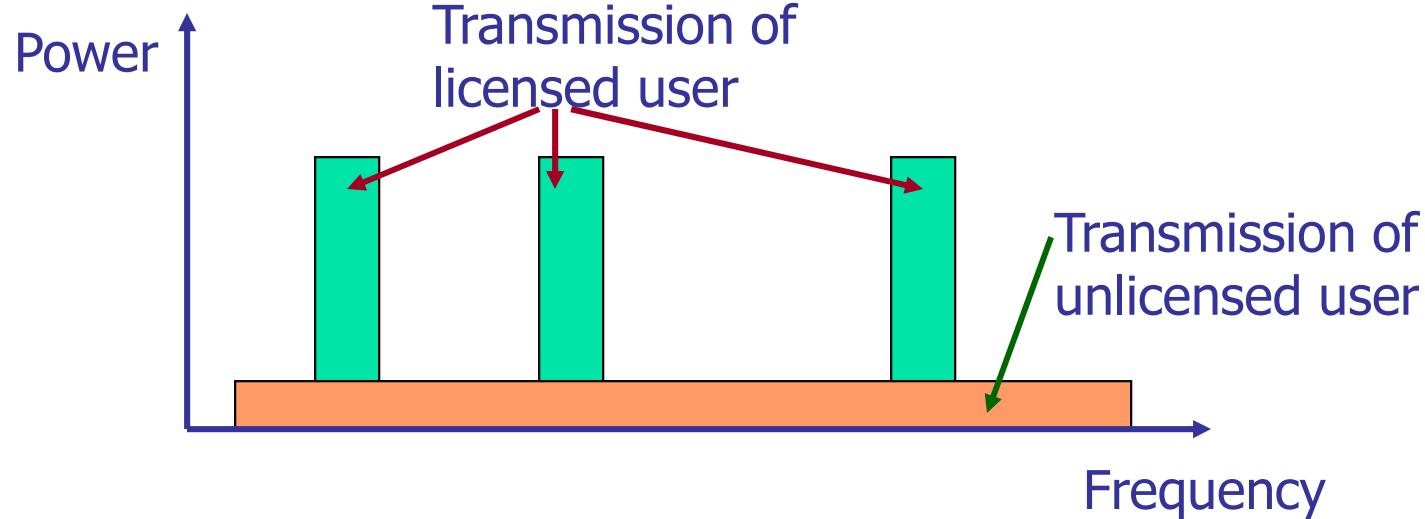

# Spectrum Underlay

---

- **Spectrum underlay approach constraints the transmission power of secondary users so that they operate below the interference temperature limit of primary users.**
- **One possible approach is to transmit the signals in a very wide frequency band (e.g., UWB communications) so that high data rate is achieved with extremely low transmission power.**
- **It is based on the worst-case assumption that primary users transmit all the time; hence does not exploit spectrum white space.**

# Spectrum Overlay


---

- **Spectrum overlay approach does not necessarily impose any severe restriction on the transmission power by secondary users – allows secondary users to identify and exploit the spectrum holes defined in space, time, and frequency (*Opportunistic Spectrum Access*).**
- **Compatible with the existing spectrum allocation – legacy systems can continue to operate without being affected by the secondary users.**
- **Regulatory policies define basic etiquettes for secondary users to ensure compatibility with legacy systems.**

# Example

---

- Use of temporally unused spectrum, which is referred to as **spectrum hole** or **white space**.

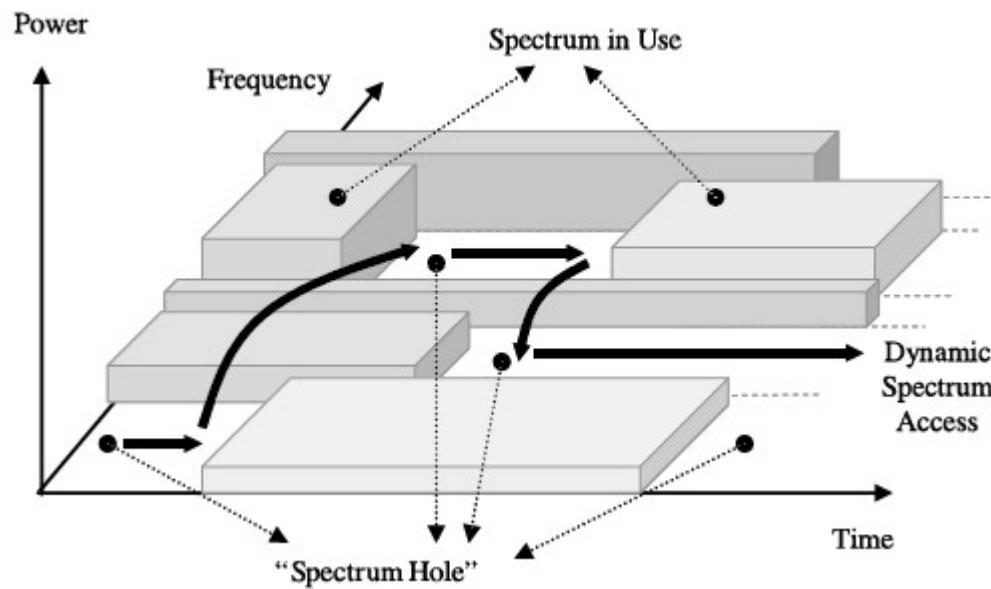

# Overview


---

---

- **Spectrum use background**
- **Concepts and approaches**
- **DSA technologies**
- **Case study: TV white spaces**

# Cognitive Radio - Architecture

- The novel characteristic of CR transceiver is a wideband sensing capability of the **RF front-end**.
  - RF hardware should be capable of tuning to any part of a large range of frequency spectrum.

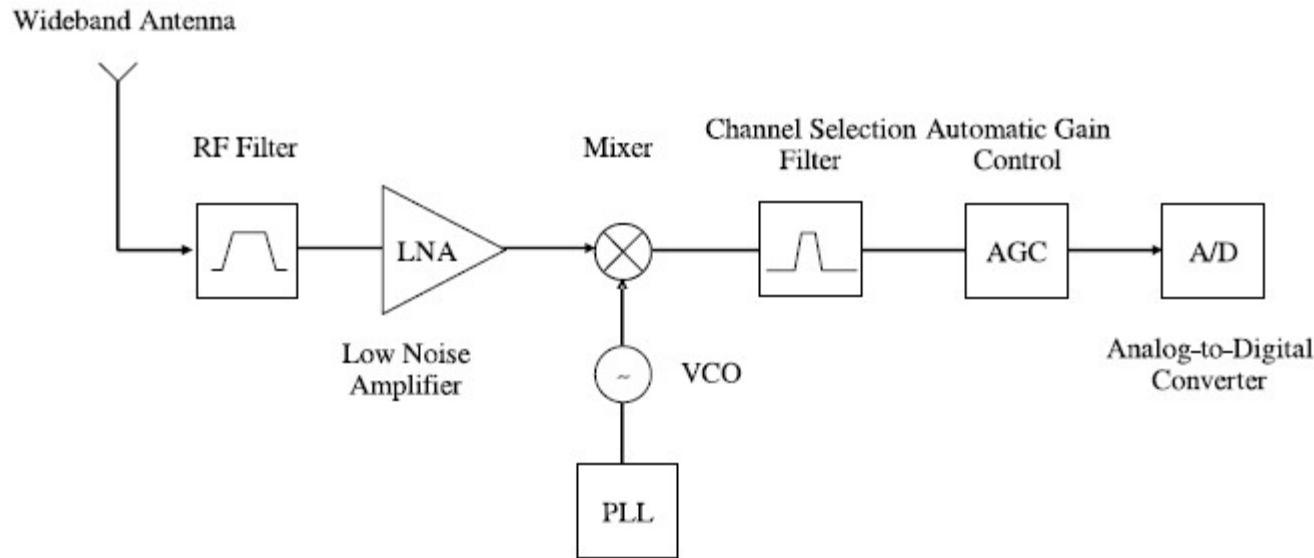

# Cognitive Radio - Reconfigurability

---


- The capability to adjust operating parameters for transmission on the fly without any modifications on the hardware components
  - **Operating frequency**
  - **Modulation**
    - Reconfigure the modulation scheme adaptive to the users requirements and channel conditions.
  - **Transmission power**
    - If higher power operation is not necessary, the CR reduces the transmitter power to a lower level to allow more users to share the spectrum and to decrease the interference
  - **Communication technology**

# Main Function in DSA

---


- **Spectrum sensing**
  - Detecting unused spectrum and sharing the spectrum without harmful interference with other users
- **Spectrum management**
  - Capturing the best available spectrum to meet user communication requirements
- **Spectrum mobility**
  - Maintaining seamless communication requirements during the transition to better spectrum
- **Spectrum sharing**
  - Providing the fair spectrum scheduling method among coexisting users

# DSA – Cognitive Cycle

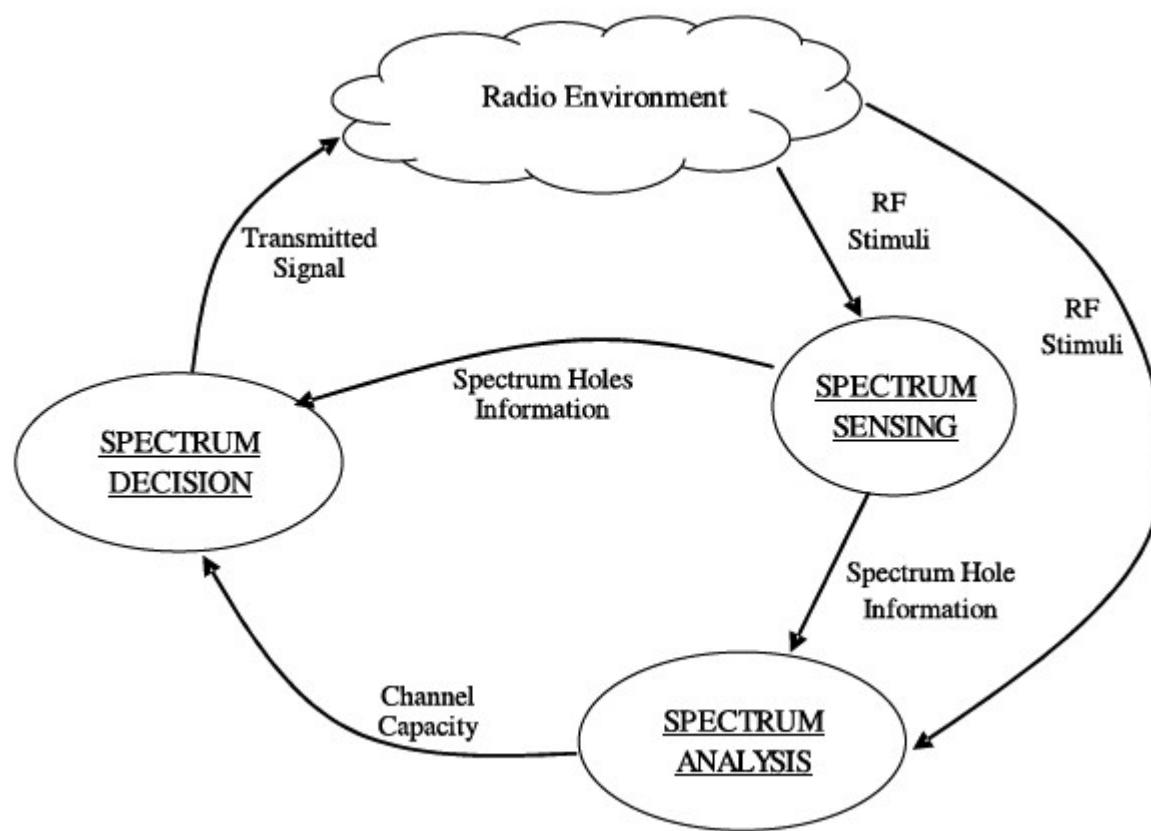

# Example of DSA

- DSA networks is deployed to exploit the spectrum holes through cognitive communication techniques

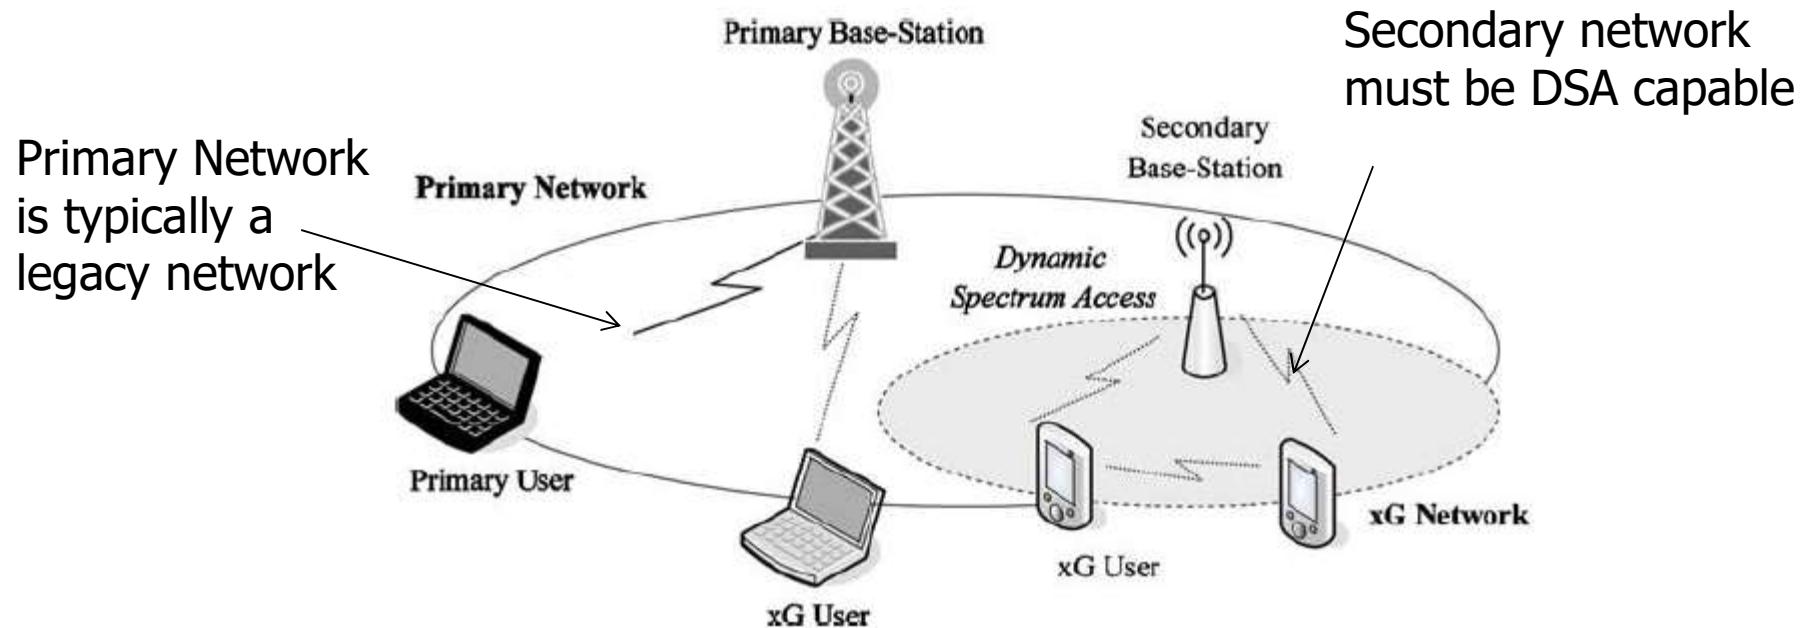


# Network Applications

---


- **Leased network**
  - The primary network can provide a leased network by
    - allowing opportunistic access to its licensed spectrum with the agreement with a third party without sacrificing the service quality of the primary users.
    - e.g., Mobile Virtual Network Operator (MVNO)
- **Cognitive mesh network**
  - Networks have the ability to add temporary or permanent spectrum to the infrastructure links used for relaying in case of high traffic load.
- **Emergency network**
- **Military network**

# Spectrum Sensing

- Secondary user monitors the spectrum
  - Must detect primary users that are receiving data within its communication range
- In practice, it is difficult for a cognitive radio to have a direct measurement of a channel between a primary receiver and a transmitter.

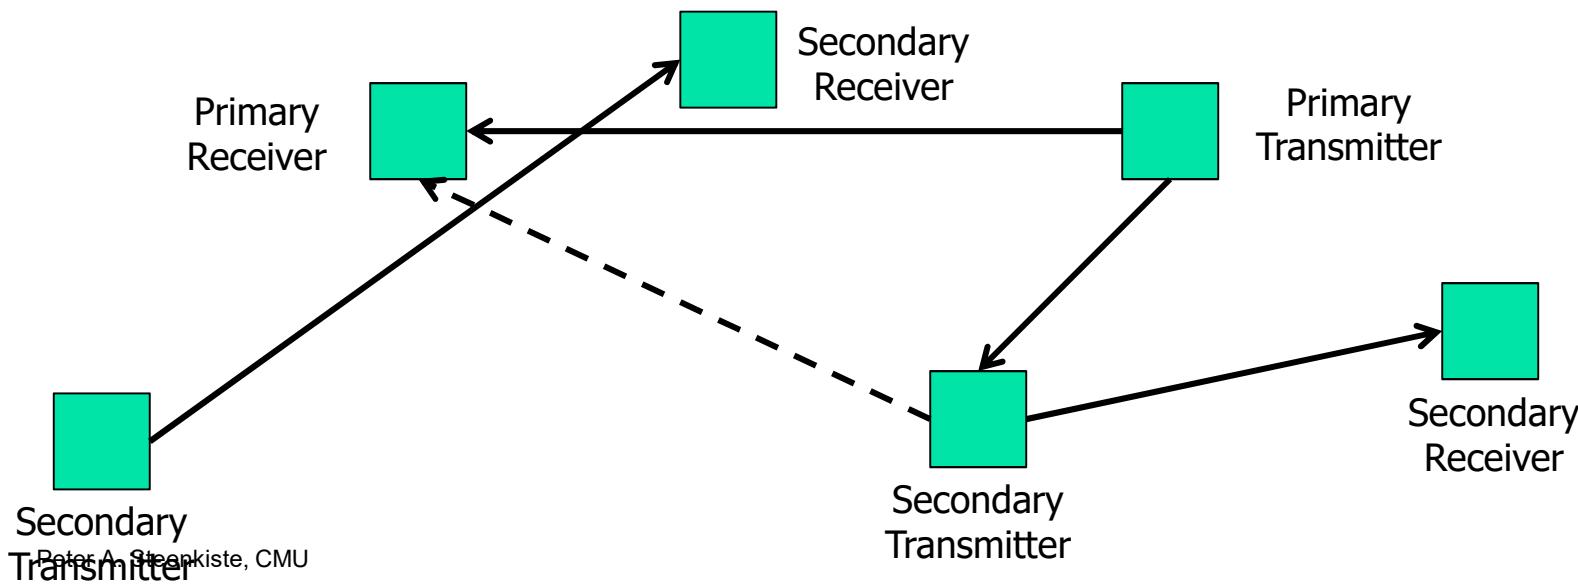


# Classification of Spectrum Sensing Techniques

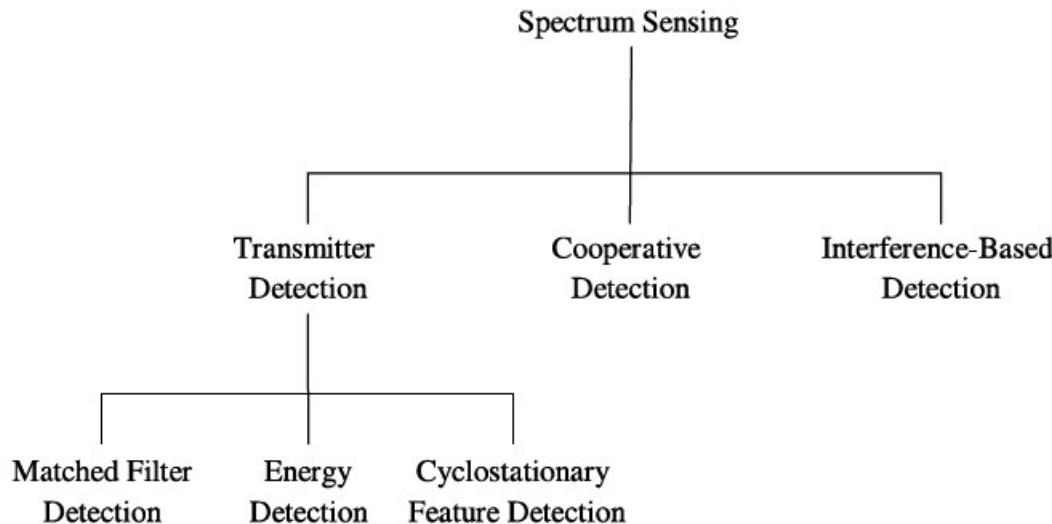


- **Transmitter detection approach: the detection of the weak signal from a primary transmitter through the local observations**
- **Basic hypothesis**  $x(t) = \begin{cases} n(t) & H_0, \\ hs(t) + n(t) & H_1, \end{cases}$ 
  - ↓  $\hookrightarrow$  **transmitted signal of the primary users**
  - the amplitude gain of the channel**

# Transmitter Detection Problem

- Transmitter detection problem
  - Receiver uncertainty (a)
  - Shadowing uncertainty (b)
- Even more difficult if receiver does not

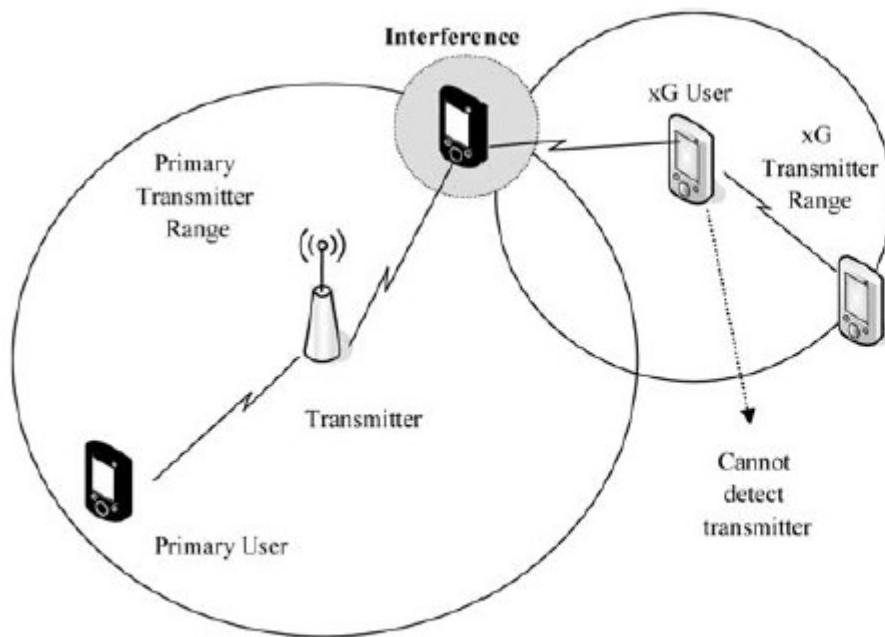

(a)

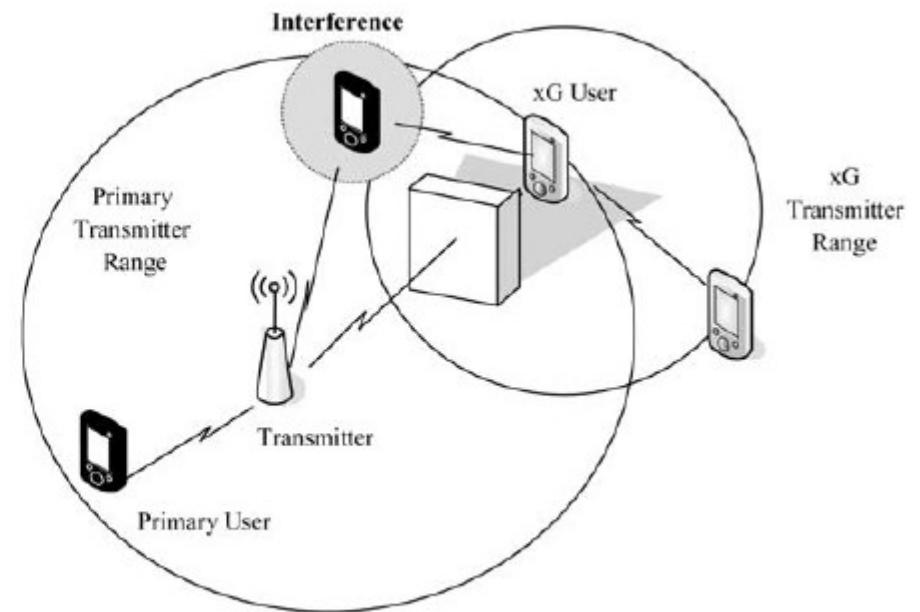

(b)


# Sensing Techniques

---

- **Energy detection** senses for energy in the time or frequency domain
  - Can be very difficult, e.g. receive only devices
- **Matched filter** can be used if a priori knowledge of primary user signal is available
  - E.g., modulation type, shaping signal, ...
  - Optimal because it maximizes SNR in AWGN channel
- **Cyclostationary detectors** look for signals with periodic properties
  - Modulated signals have a mean and autocorrelation that exhibit periodicity.
  - These features are detected by analyzing a spectral correlation function.

# Cooperated Spectrum Sensing

- Cooperated spectrum sensing methods where information from multiple secondary users are incorporated for primary user detection.
  - allow to mitigate the multi-path fading and shadowing effects, which improves the detection

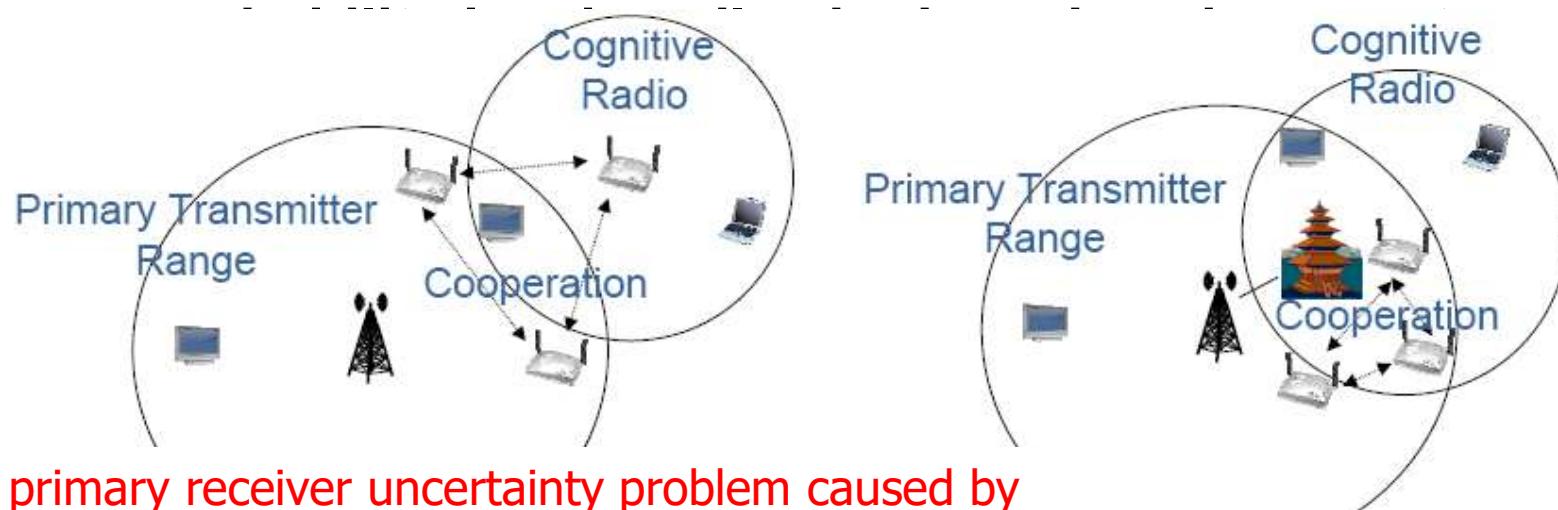

The primary receiver uncertainty problem caused by the lack of the primary receiver location knowledge is unsolved.

# Spectrum Analysis

---


- The available spectrum holes show different characteristics which vary over time.
- Spectrum analysis enables the characterization of different spectrum bands,
  - which can be exploited to get the spectrum band appropriate to the user requirements.
- In order to describe the dynamic nature of DSA networks, each spectrum hole should be characterized considering
  - not only time-varying radio environment and
  - but also the primary user activity and the spectrum band information.

# Spectrum Sharing Process

---

- **Spectrum sensing**
- **Spectrum allocation**
  - The allocation not only depends on spectrum availability, but it is also determined based on internal (and possible external) policies.
- **Spectrum access**
  - The access should be coordinated in order to prevent multiple users colliding in overlapping portions of the spectrum.
- **Transmitter-receiver handshake**
- **Spectrum mobility**

# Classification of Spectrum Sharing

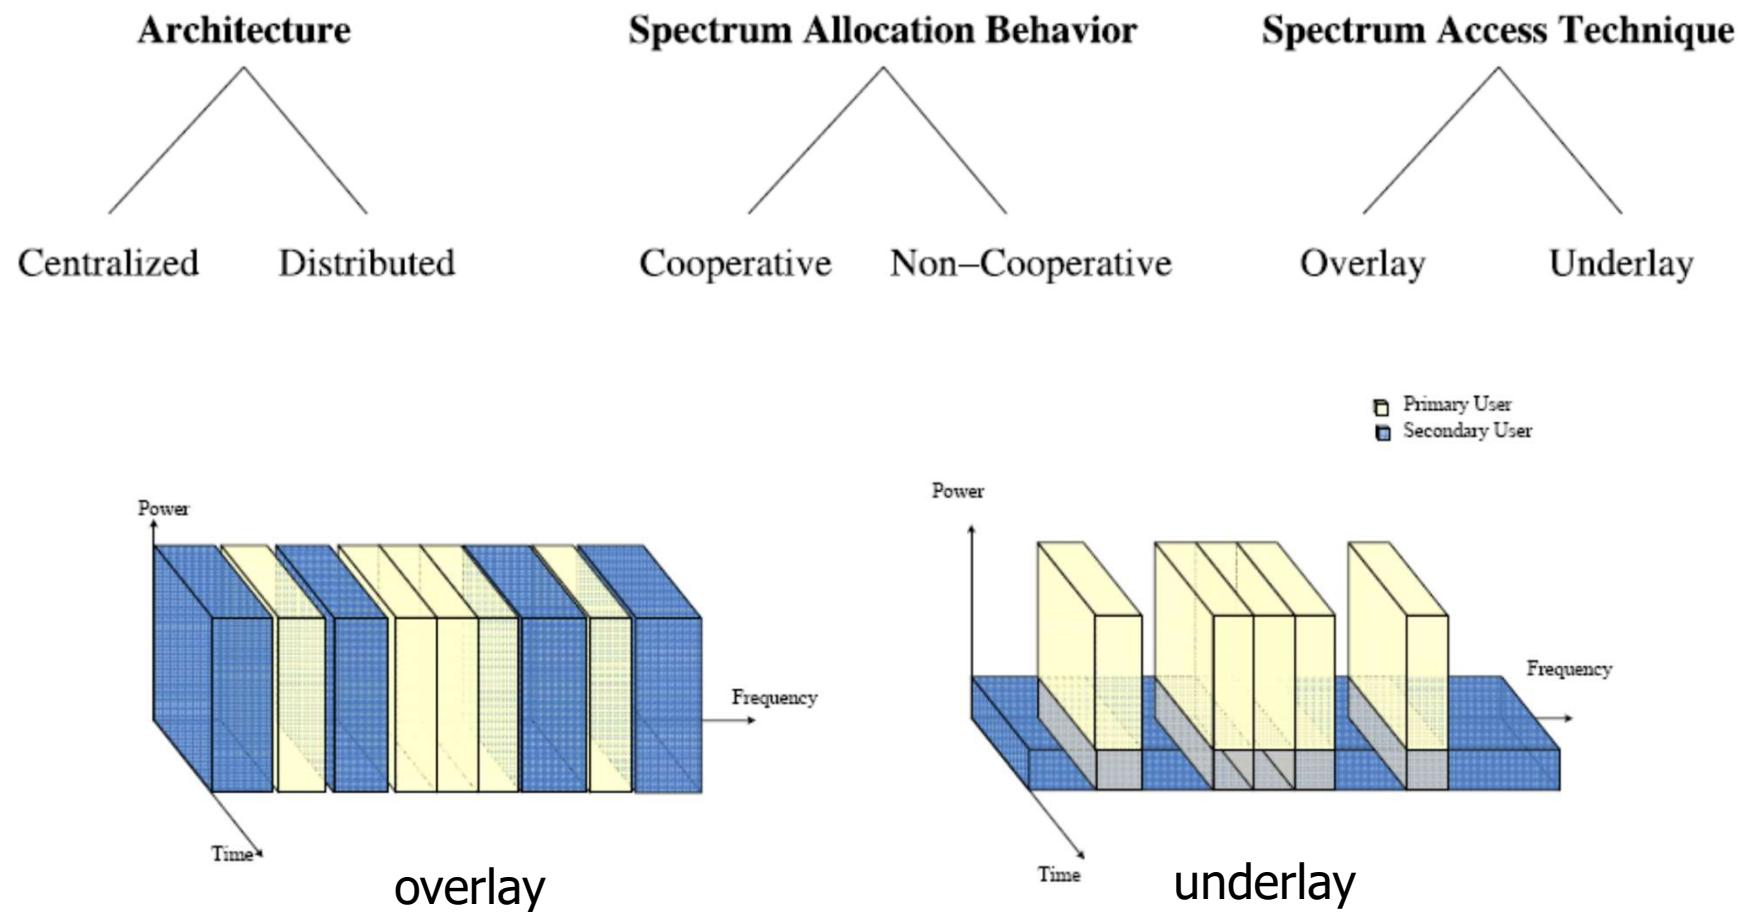


# Cooperative/Centralized DSA

---

- **A centralized server maintains a database of spectrum availability and access information (based on information received from secondary users, e.g., through a dedicated control channel).**
- **Spectrum management is simpler and coordinated and enables efficient spectrum sharing.**

# Cooperative/Centralized DSA

---

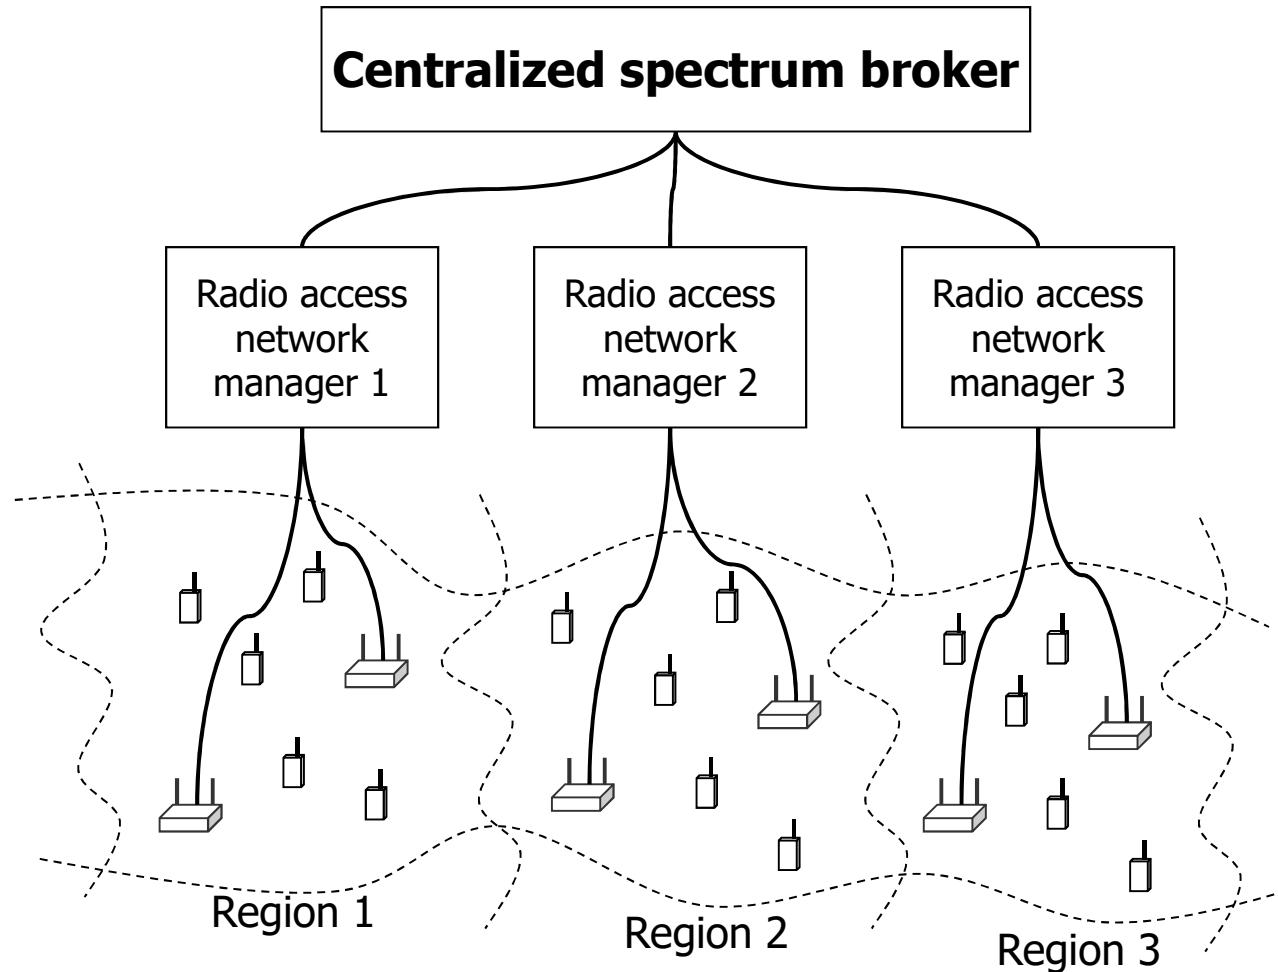


# Cooperative/Distributed DSA

---

- Cooperative/distributed strategy relies on cooperative local actions throughout the network (to achieve a performance close to the global optimal performance).
- May suffer due to hidden node problem and large control overheads
- In both centralized and distributed strategies, the primary user may or may not cooperate.

# Cooperative/Distributed DSA Example

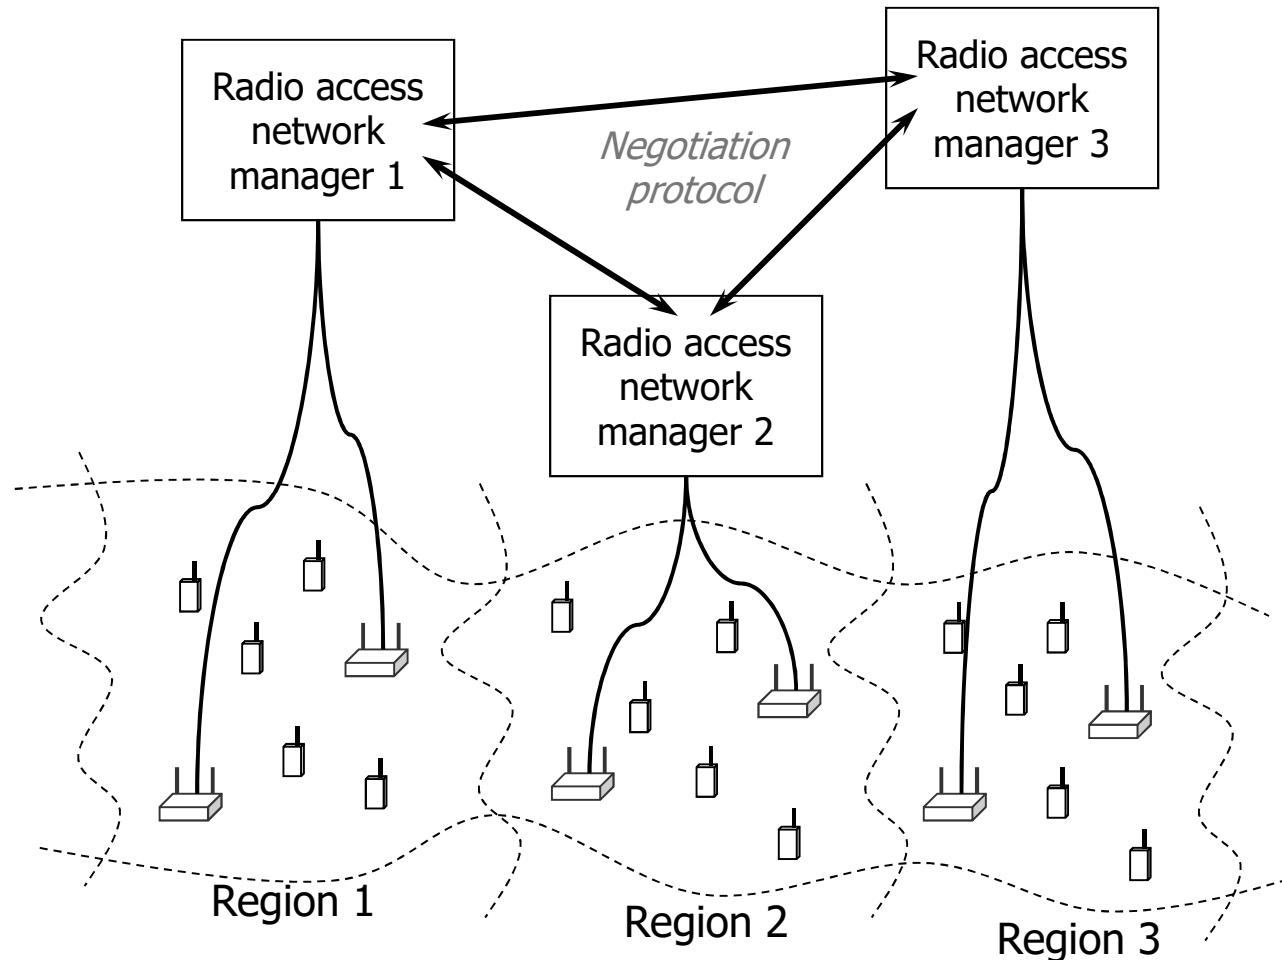


# Overview

---

---

- **Spectrum use background**
- **Concepts and approaches**
- **DSA technologies**
- **Case study: TV white spaces**

Higher Frequency

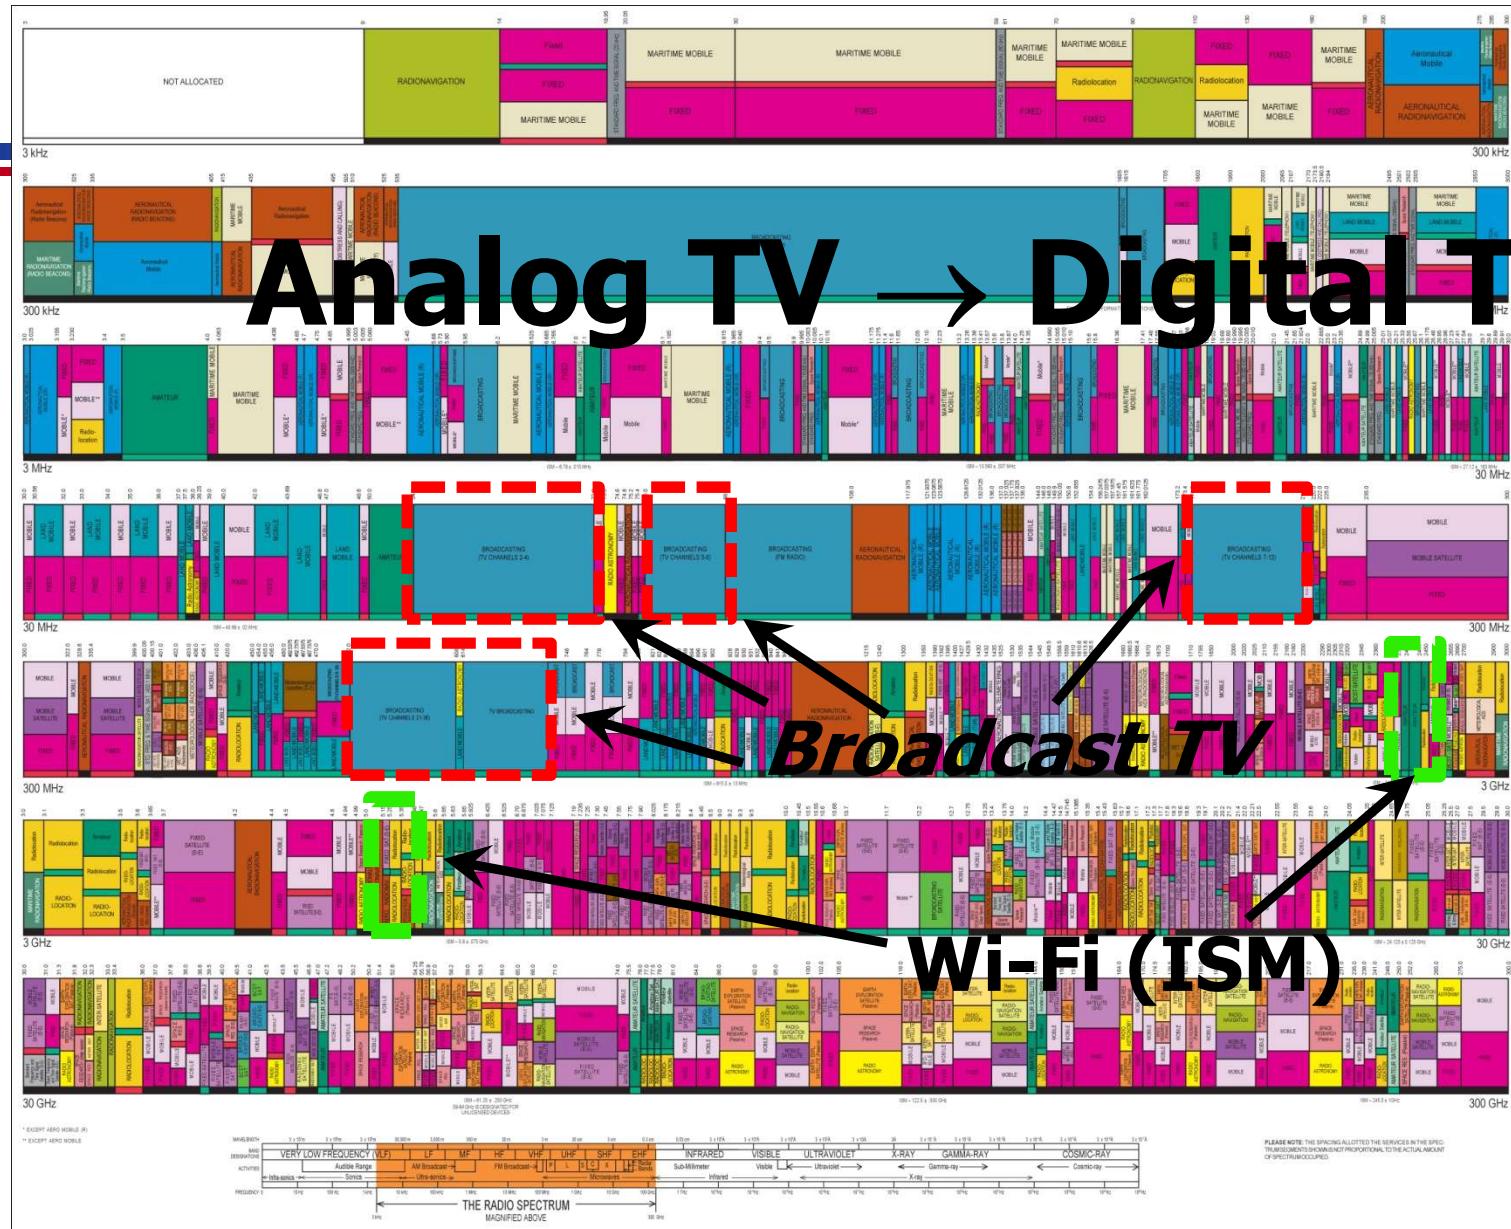


# TV White Spaces

---

- TV channels are “allotted” to cities to serve the local area
- Other licensed and unlicensed services are also in TV bands
  - Wireless microphones
- “White Spaces” are the channels that are “unused” at any given location by licensed devices
  - FCC regulation allows access by unlicensed devices subject to many rules


# What are TV White Spaces?

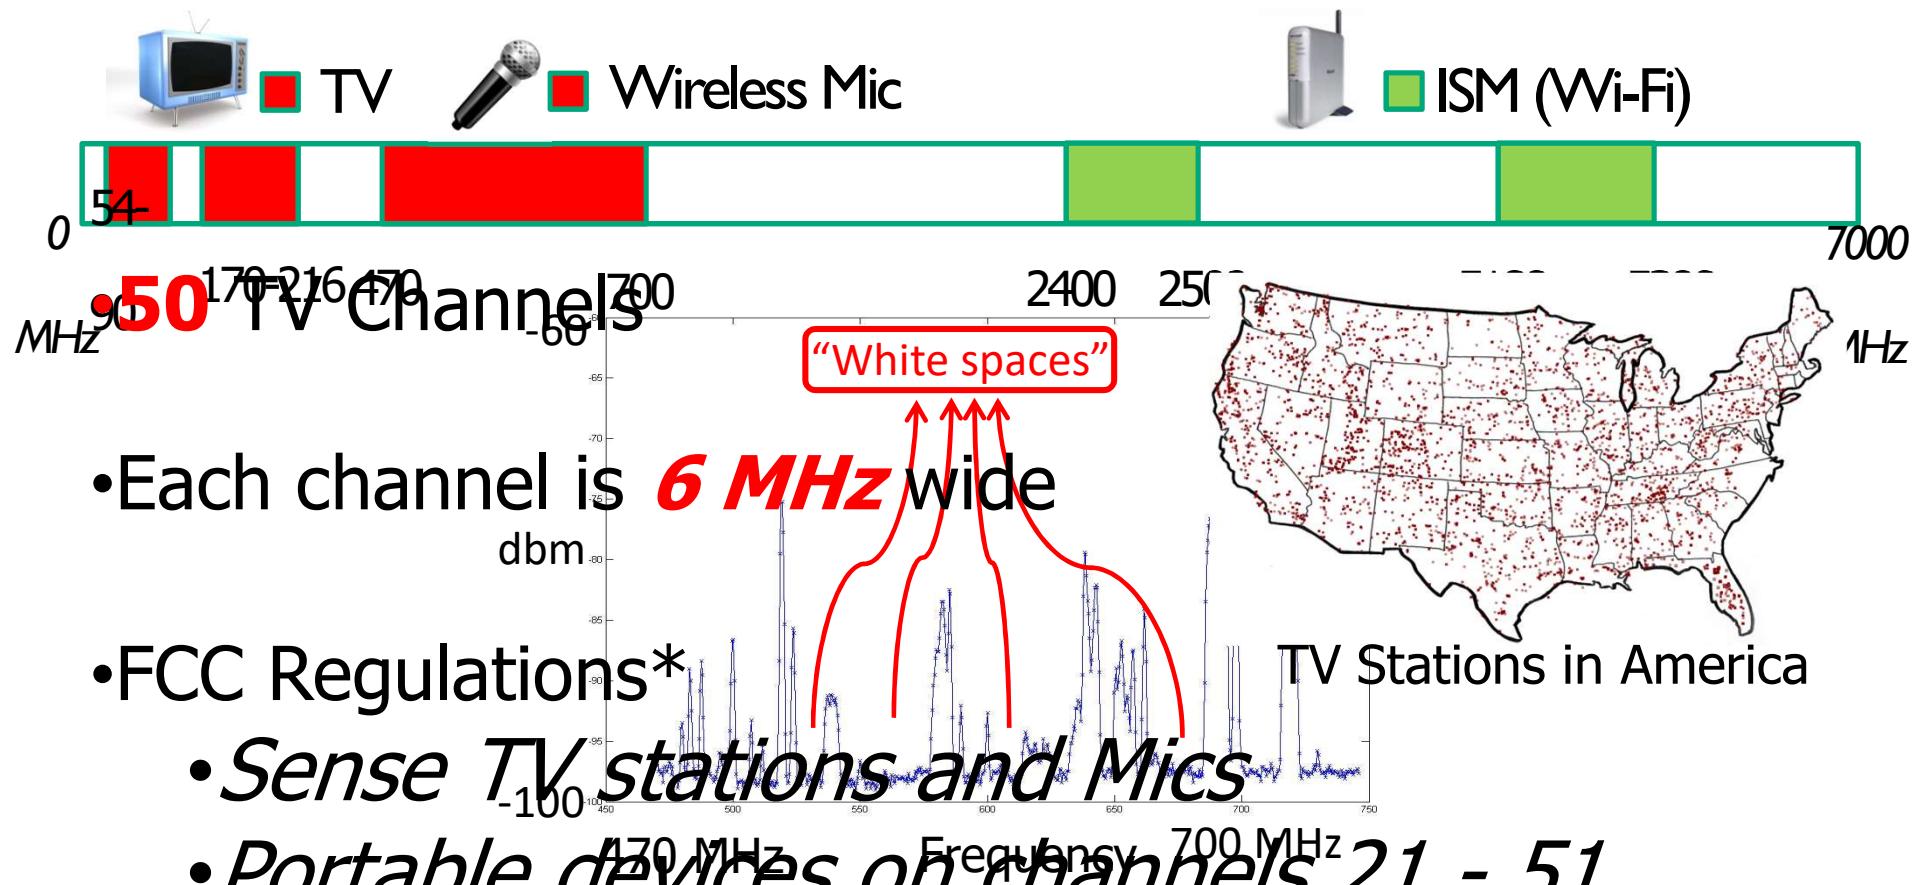

White Spaces

are *Unoccupied TV Channels*

# The Promise of White Spaces

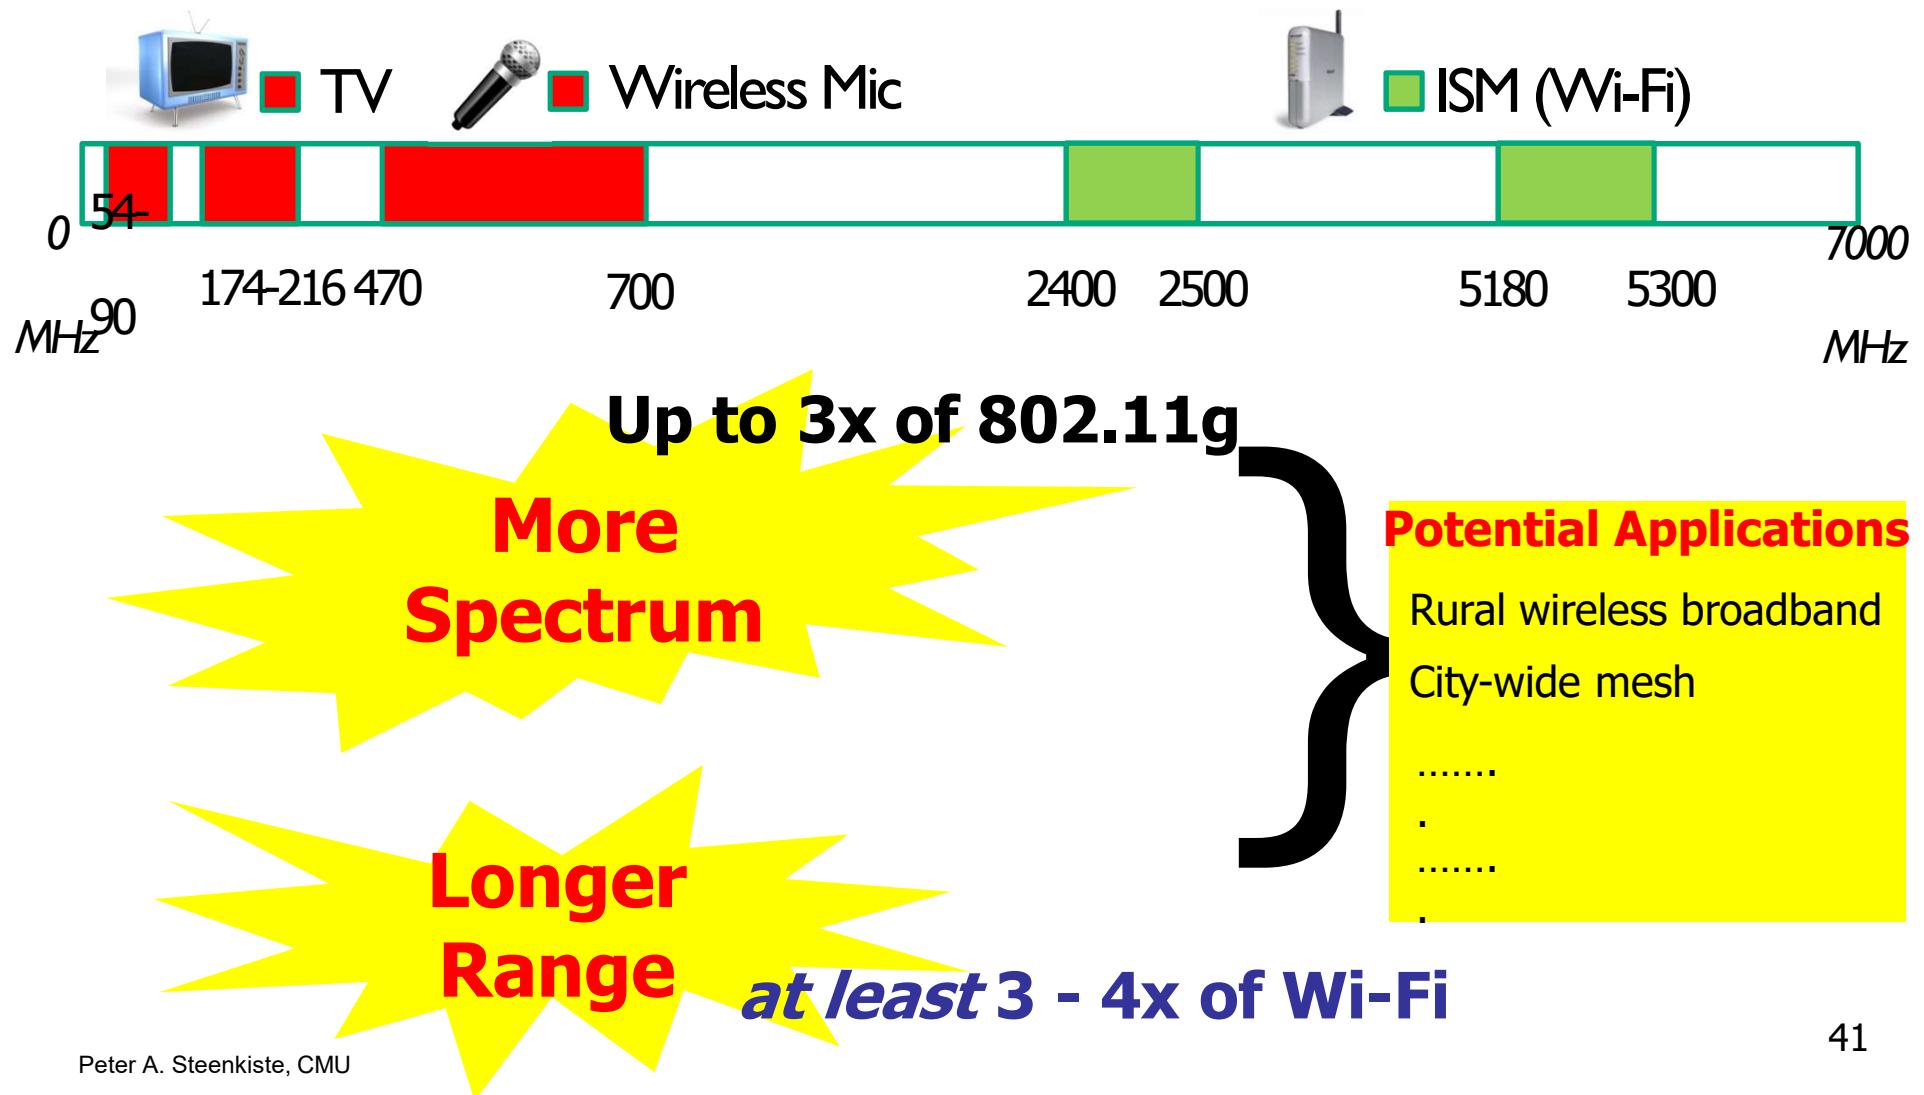

# Why Using Geolocation & Database


---

- **Based on prototype test program sensing-only solutions not sufficiently developed**
  - Very long scan times, poor performance in presence of strong adjacent channel signal, ..
  - Difficult to reliably detecting wireless microphones
  - Inability to determine presence of passive receive sites
- **Disagreement on technical parameters for sensing**
  - What is detection threshold for determining presence of a signal? How is measurement accomplished? Type of detector
- **Tradeoff between continuing to develop sensing technology first vs. earlier deployment**
- **Requires geolocation capability in conjunction with a database to provide each device with a list of available channels specific to its location**

# TV White Space Rules



- Final rules adopted 9/2010; modified 4/2012
  - First new spectrum for unlicensed devices below 5 GHz in many years
  - Access based on geolocation & database
- Incumbent services protect by database
  - TV broadcast stations, translator and booster stations, cable TV headends, ...
  - Land mobile (in some cities); wireless mics

[https://www.whitespaceforus.com/wsdb/wsdb\\_ui/Channel\\_Availability.html](https://www.whitespaceforus.com/wsdb/wsdb_ui/Channel_Availability.html)

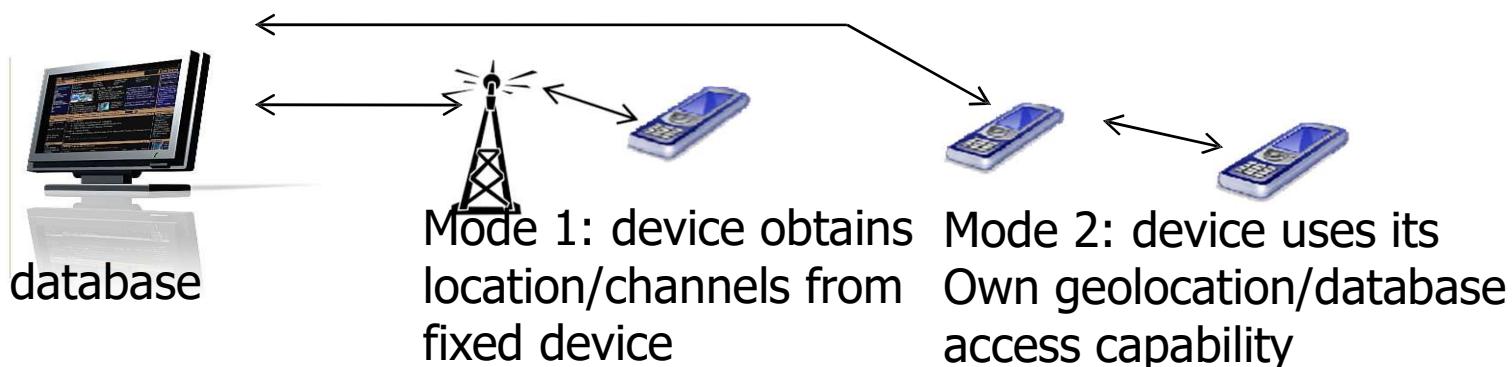


## TV White Space Spectrum Availability Map - Fixed

Number of Available Channels by Census Block Groups

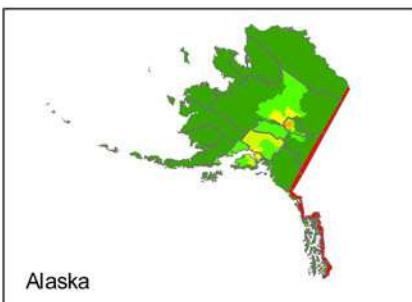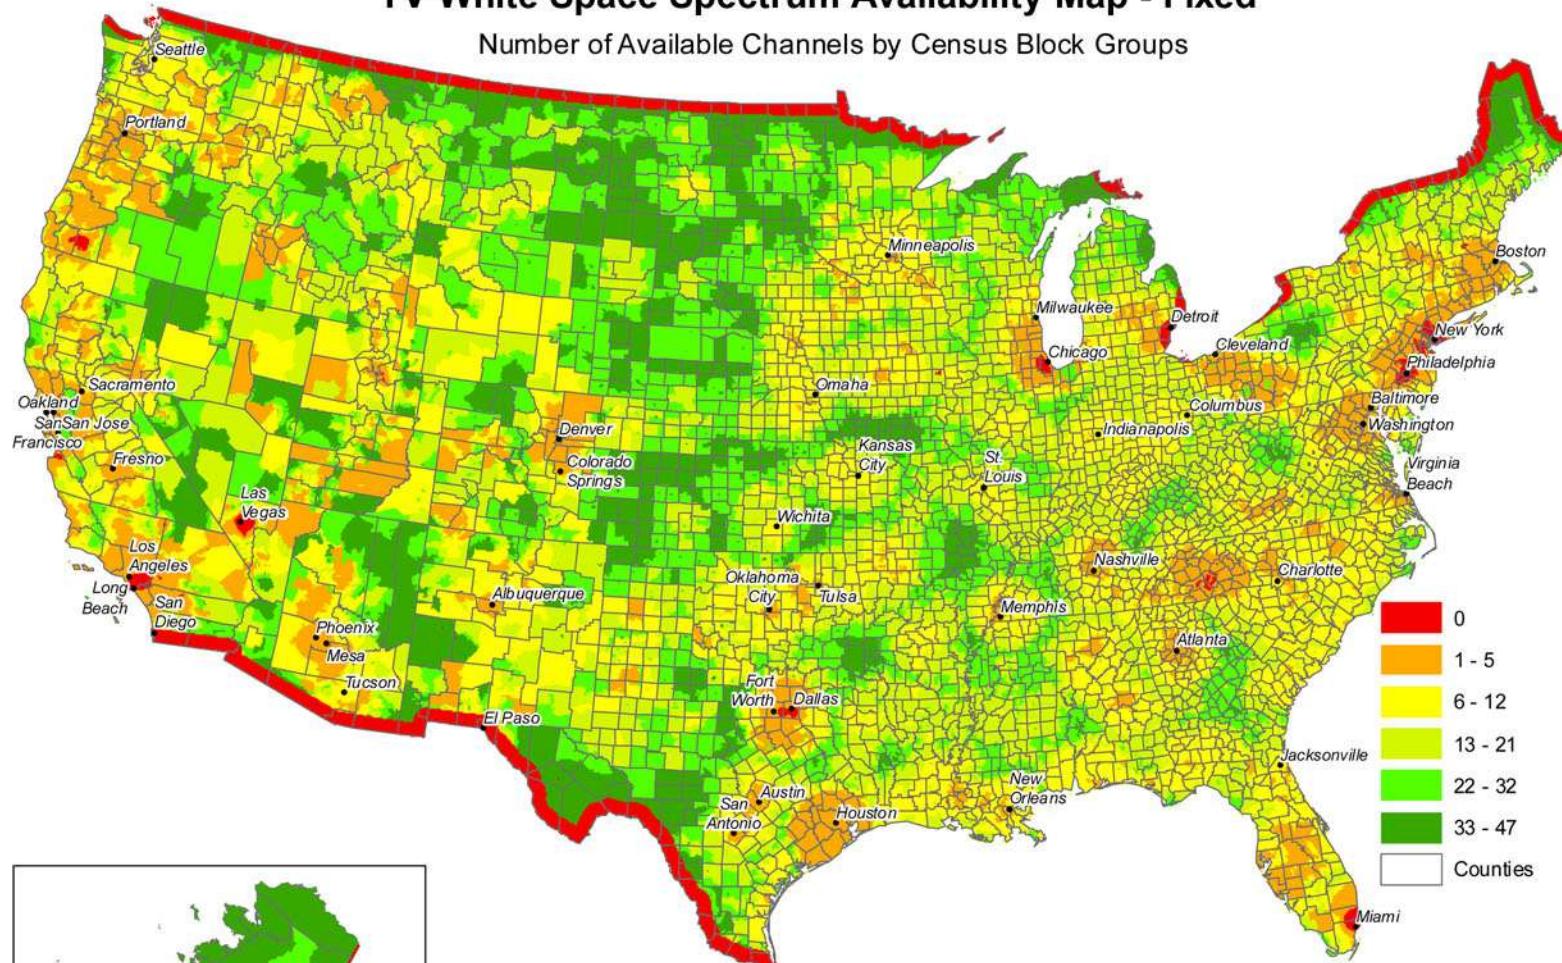

Alaska



Hawaii




  
**COMSEARCH**  
A CommScope Company



Puerto Rico & US  
Virgin Islands

## TV White Space Spectrum Availability Map - Mode II

Number of Available Channels by Census Block Groups

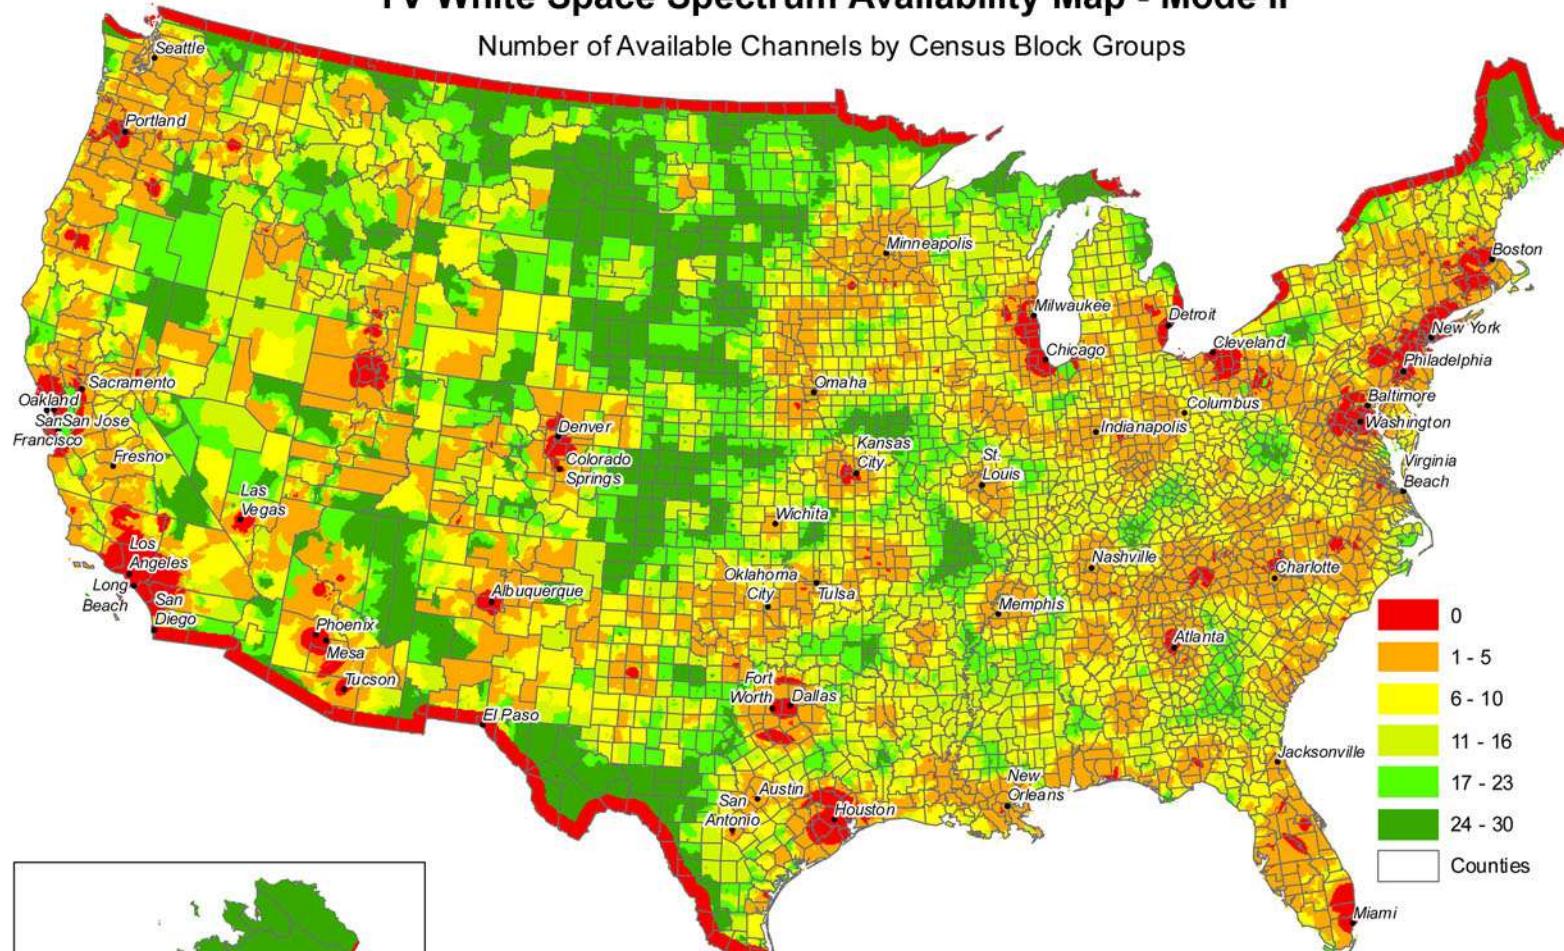

# Standards for White Spaces

---

- IEEE 802.11af: Wireless Local Area Network
- IEEE 802.22: Cognitive Wireless Regional Area Network
- IEEE 802.15.4m: Wireless Personal Area Network
- IEEE 802.19.1: Coexistence in white spaces
- IETF PAWS: Database access
- Other standards organizations:
  - ETSI BRAN: European Telecommunications Standards Institute Broadband Radio Access Networks
  - CEPT ECC SE43: European Conference of Postal and Telecommunications Administrations Electronics Communications Committee Spectrum Engineering
  - ITU-WP1B: International Telecommunication Union Working Party 1B – Spectrum Management Methodologies

# Coexistence Problem

- **Exposed Terminal:** 802.11af can not transmit because 802.22 keeps the channel busy
- **Hidden Terminal:** 802.11af interferes with 802.22 transmissions

