

Readings:

K&F: 8.1, 8.2, 8.3, 8.7.1

K&F: 9.1, 9.2, 9.3, 9.4

Variable Elimination 2

Clique Trees

Graphical Models – 10708


Carlos Guestrin

Carnegie Mellon University


October 13th, 2006

1

Complexity of variable elimination – Graphs with loops

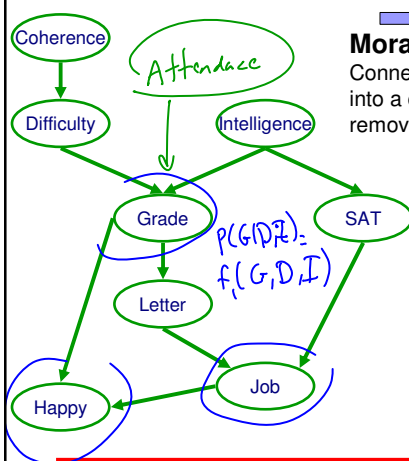

Moralize graph:
Connect parents
into a clique and
remove edge directions

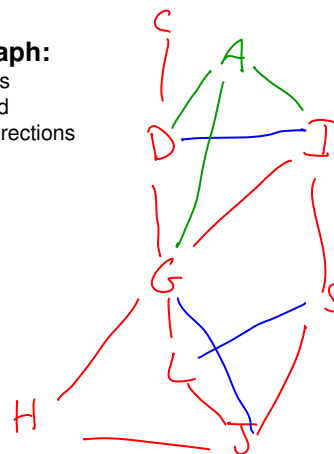


Connect nodes that appear together in an initial factor

10-708 – ©Carlos Guestrin 2006

2

Induced graph

The **induced graph** $I_{F \prec}$ for elimination order $\prec$ has an edge $X_i - X_j$ if X_i and X_j appear together in a factor generated by VE for elimination order $\prec$ on factors F

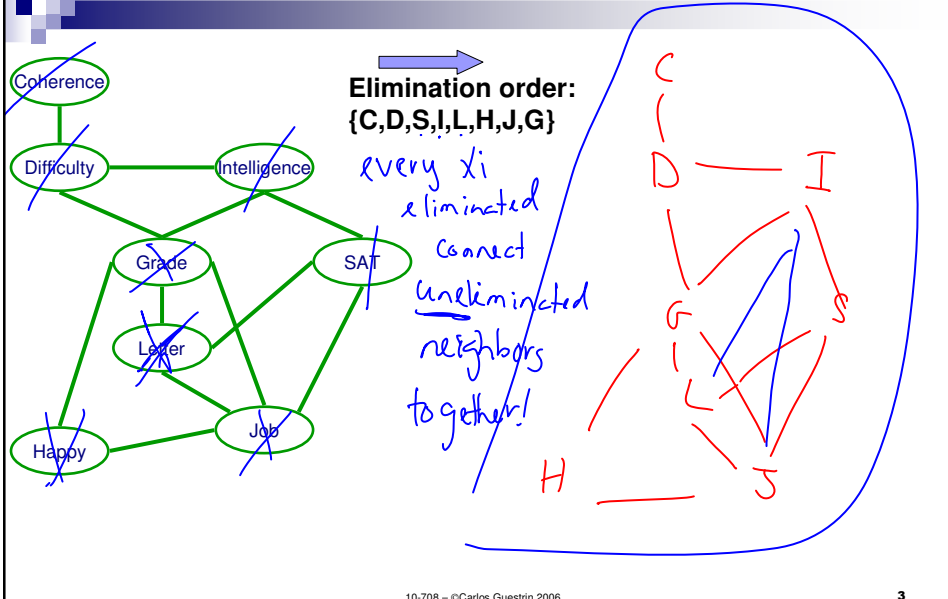


10-708 - ©Carlos Guestrin 2006

3

Induced graph and complexity of VE

Read complexity from cliques in induced graph

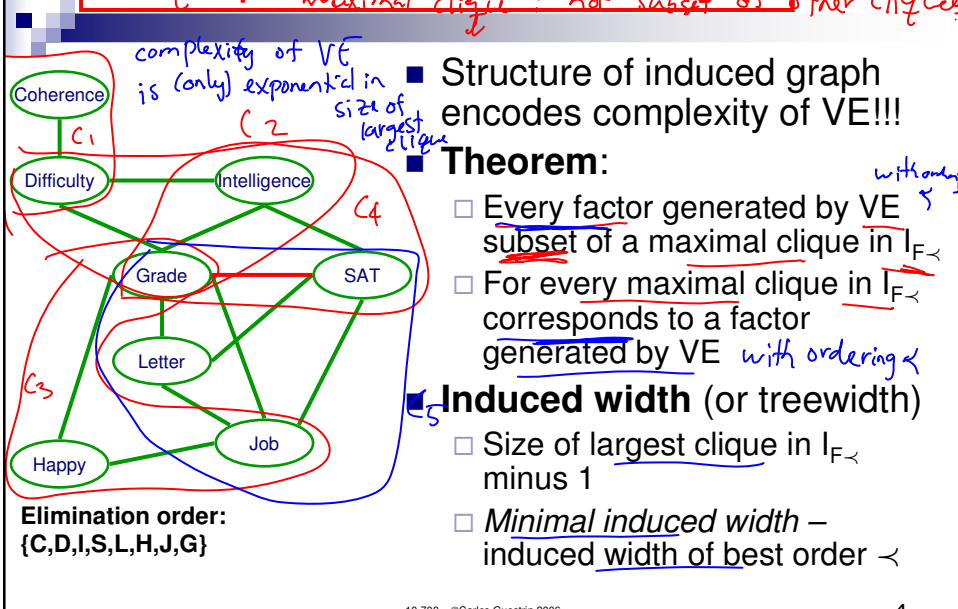

10-708 - ©Carlos Guestrin 2006


4

Example: Large induced-width with small number of parents

Compact representation $\nrightarrow$ Easy inference ☹️

5

Finding optimal elimination order

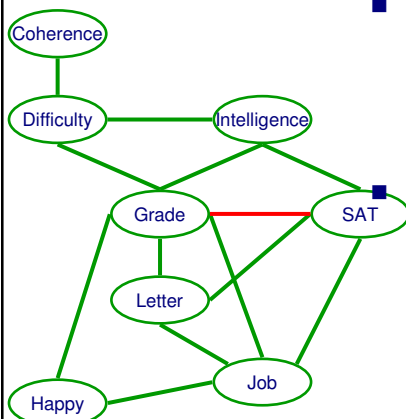

■ **Theorem:** Finding best elimination order is NP-complete:

- Decision problem: Given a graph, determine if there exists an elimination order that achieves induced width $\leq K$

■ **Interpretation:**


- Hardness of finding elimination order in addition to hardness of inference
- Actually, can find elimination order in time exponential in size of largest clique – same complexity as inference

Elimination order:
{C,D,I,S,L,H,J,G}

10.708 – ©Carlos Guestrin 2006

6

Induced graphs and chordal graphs

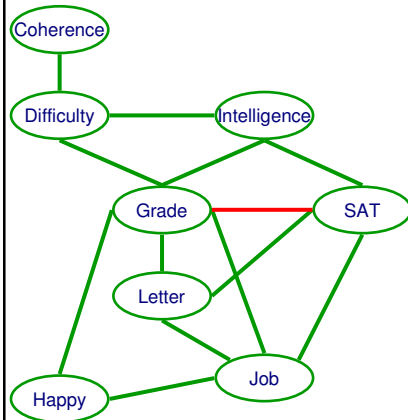

■ Chordal graph:

- Every cycle $X_1 - X_2 - \dots - X_k - X_1$ with $k \geq 3$ has a chord
- Edge $X_i - X_j$ for non-consecutive i & j

■ Theorem:


- Every induced graph is chordal

- “Optimal” elimination order easily obtained for chordal graph

10-708 – ©Carlos Guestrin 2006

7

Chordal graphs and triangulation

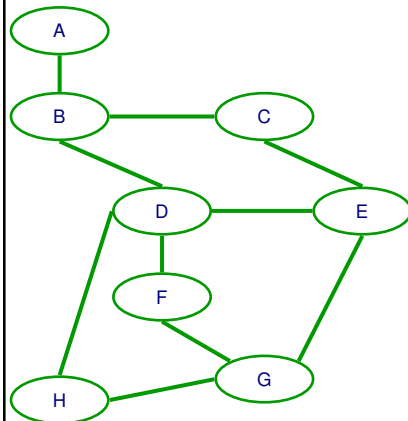

- **Triangulation:** turning graph into chordal graph

■ Max Cardinality Search:

- Simple heuristic
- Initialize unobserved nodes **X** as unmarked
- For $k = |\mathbf{X}|$ to 1
 - $X \leftarrow$ unmarked var with most **marked** neighbors
 - $\prec(X) \leftarrow k$
 - Mark X


- **Theorem:** Obtains optimal order for chordal graphs

- Often, not so good in other graphs!

10-708 – ©Carlos Guestrin 2006

8

Minimum fill/size/weight heuristics

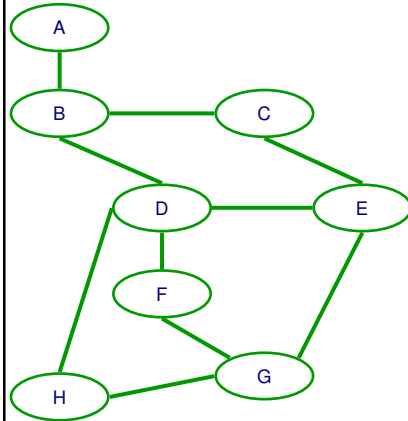

- Many more effective heuristics
 - see reading
- **Min (weighted) fill heuristic**
 - Often very effective
- Initialize unobserved nodes **X** as unmarked
- For $k = 1$ to $|X|$
 - $X \leftarrow$ unmarked var whose elimination adds fewest edges
 - $\prec(X) \leftarrow k$
 - Mark X
 - Add fill edges introduced by eliminating X
- Weighted version:
 - Consider size of factor rather than number of edges

10-708 – ©Carlos Guestrin 2006

9

Choosing an elimination order

- Choosing best order is NP-complete
 - Reduction from MAX-Clique
- Many good heuristics (some with guarantees)
- Ultimately, can't beat NP-hardness of inference
 - Even optimal order can lead to exponential variable elimination computation
- In practice
 - Variable elimination often very effective
 - Many (many many) approximate inference approaches available when variable elimination too expensive
 - Most approximate inference approaches build on ideas from variable elimination

10-708 – ©Carlos Guestrin 2006

10

Announcements


- Recitation on advanced topic:
 - Carlos on Context-Specific Independence
 - On Monday Oct 16, 5:30-7:00pm in Wean Hall 4615A

10.708 – ©Carlos Guestrin 2006

11

Most likely explanation (MLE)

- Query: $\operatorname{argmax}_{x_1, \dots, x_n} P(x_1, \dots, x_n \mid e)$



- Using defn of conditional probs:

$$\operatorname{argmax}_{x_1, \dots, x_n} P(x_1, \dots, x_n \mid e) = \operatorname{argmax}_{x_1, \dots, x_n} \frac{P(x_1, \dots, x_n, e)}{P(e)}$$

- Normalization irrelevant:

$$\operatorname{argmax}_{x_1, \dots, x_n} P(x_1, \dots, x_n \mid e) = \operatorname{argmax}_{x_1, \dots, x_n} P(x_1, \dots, x_n, e)$$

10.708 – ©Carlos Guestrin 2006

12


Max-marginalization



10.708 – ©Carlos Guestrin 2006

13


Example of variable elimination for MLE – Forward pass

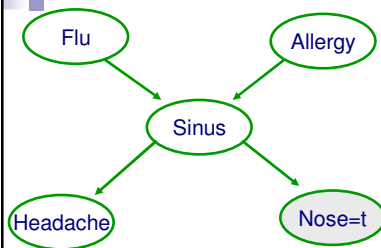

10.708 – ©Carlos Guestrin 2006

14

Example of variable elimination for MLE – Backward pass

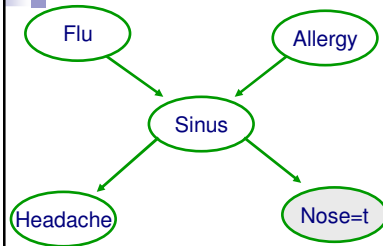

10-708 – ©Carlos Guestrin 2006

15

MLE Variable elimination algorithm – Forward pass

- Given a BN and a MLE query $\max_{x_1, \dots, x_n} P(x_1, \dots, x_n, \mathbf{e})$
- Instantiate evidence $\mathbf{E}=\mathbf{e}$
- Choose an ordering on variables, e.g., $X_1, \dots, X_n$
- For $i = 1$ to n , If $X_i \notin \mathbf{E}$
 - Collect factors $f_1, \dots, f_k$ that include X_i
 - Generate a new factor by eliminating X_i from these factors

$$g = \max_{x_i} \prod_{j=1}^k f_j$$

- Variable X_i has been eliminated!

10-708 – ©Carlos Guestrin 2006

16

MLE Variable elimination algorithm – Backward pass

- $\{x_1^*, \dots, x_n^*\}$ will store maximizing assignment
- For $i = n$ to 1 , If $X_i \notin \mathbf{E}$
 - Take factors $f_1, \dots, f_k$ used when X_i was eliminated
 - Instantiate $f_1, \dots, f_k$, with $\{x_{i+1}^*, \dots, x_n^*\}$
 - Now each f_j depends only on X_i
 - Generate maximizing assignment for X_i :

$$x_i^* \in \operatorname{argmax}_{x_i} \prod_{j=1}^k f_j$$

10-708 – ©Carlos Guestrin 2006

17


What you need to know about VE

- Variable elimination algorithm
 - Eliminate a variable:
 - Combine factors that include this var into single factor
 - Marginalize var from new factor
 - Cliques in induced graph correspond to factors generated by algorithm
 - Efficient algorithm (“only” exponential in induced-width, not number of variables)
 - If you hear: “Exact inference only efficient in tree graphical models”
 - You say: “No!!! Any graph with low induced width”
 - And then you say: “And even some with very large induced-width” (special recitation)
- Elimination order is important!
 - NP-complete problem
 - Many good heuristics
- Variable elimination for MLE
 - Only difference between probabilistic inference and MLE is “sum” versus “max”

10-708 – ©Carlos Guestrin 2006

18

What if I want to compute
 $P(X_i | x_0, x_{n+1})$ for each i ?

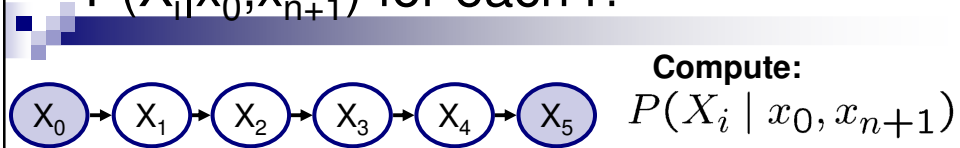


Variable elimination for each i ?

Variable elimination for every i , what's the complexity?

10.708 – ©Carlos Guestrin 2006

19


Reusing computation

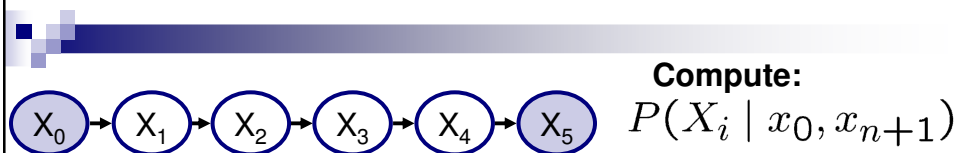

10.708 – ©Carlos Guestrin 2006


20

Cluster graph

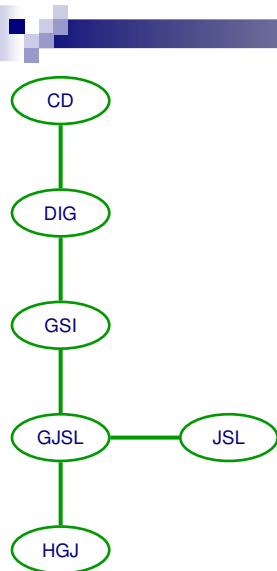

Cluster graph: For set of factors F


- Undirected graph
- Each node i associated with a cluster C_i
- *Family preserving*: for each factor $f_j \in F$, $\exists$ node i such that $\text{scope}[f_j] \subseteq C_i$
- Each edge $i - j$ is associated with a separator $S_{ij} = C_i \cap C_j$



10-708 - ©Carlos Guestrin 2006

21

Factors generated by VE

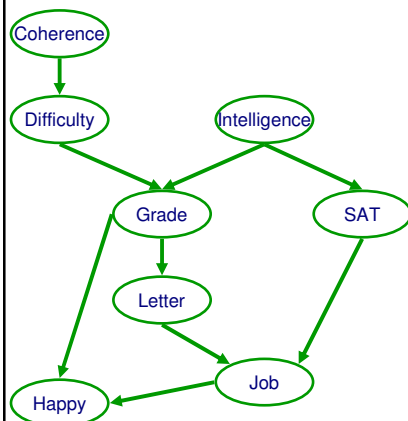


Elimination order:
 $\{C, D, I, S, L, H, J, G\}$

10-708 - ©Carlos Guestrin 2006

22

Cluster graph for VE

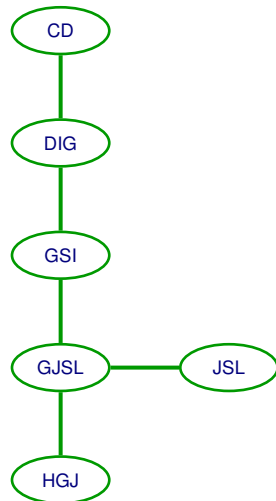

■ VE generates cluster tree!

- One clique for each factor used/generated
- Edge $i - j$, if f_i used to generate f_j
- “Message” from i to j generated when marginalizing a variable from f_i
- Tree because factors only used once


■ Proposition:

- “Message” δ_{ij} from i to j
- $\text{Scope}[\delta_{ij}] \subseteq \mathbf{S}_{ij}$

10-708 – ©Carlos Guestrin 2006

23

Running intersection property

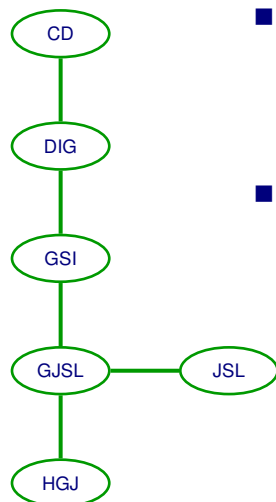

■ Running intersection property (RIP)

- Cluster tree satisfies RIP if whenever $X \in \mathbf{C}_i$ and $X \in \mathbf{C}_j$ then X is in every cluster in the (unique) path from $\mathbf{C}_i$ to $\mathbf{C}_j$

■ Theorem:

- Cluster tree generated by VE satisfies RIP

10-708 – ©Carlos Guestrin 2006

24

Constructing a clique tree from VE


- Select elimination order

$\prec$

- Connect factors that would be generated if you run VE with order $\prec$

- Simplify!

- Eliminate factor that is subset of neighbor

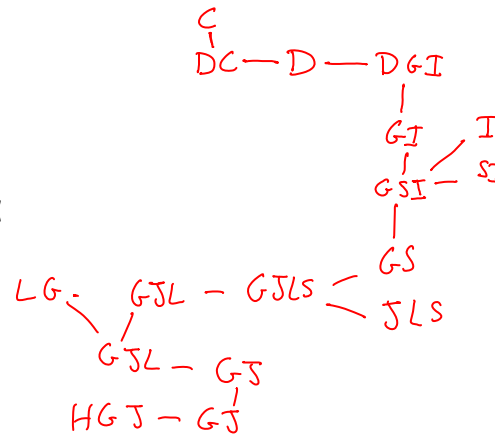

10-708 - ©Carlos Guestrin 2006

25

Find clique tree from chordal graph


- Triangulate moralized graph to obtain chordal graph

- Find maximal cliques

- NP-complete in general
- Easy for chordal graphs
- Max-cardinality search

- Maximum spanning tree finds clique tree satisfying RIP!!!

- Generate weighted graph over cliques
- Edge weights (i,j) is separator size - $|C_i \cap C_j|$



10-708 - ©Carlos Guestrin 2006

26

Clique tree & Independencies



■ Clique tree (or Junction tree)

- A cluster tree that satisfies the RIP


■ Theorem:

- Given some BN with structure G and factors F
- For a clique tree T for F consider $C_i - C_j$ with separator S_{ij} :
 - X – any set of vars in C_i side of the tree
 - Y – any set of vars in C_j side of the tree
- Then, $(X \perp Y \mid S_{ij})$ in BN
- Furthermore, $I(T) \subseteq I(G)$

10-708 – ©Carlos Guestrin 2006


27

Variable elimination in a clique tree 1



■ Clique tree for a BN

- Each CPT assigned to a clique
- Initial potential $\pi_0(C_i)$ is product of CPTs



10-708 – ©Carlos Guestrin 2006

28

Variable elimination in a clique tree 2




■ VE in clique tree to compute $P(X_i)$

- Pick a root (any node containing X_i)
- Send messages recursively from leaves to root
 - Multiply incoming messages with initial potential
 - Marginalize vars that are not in separator
- Clique *ready* if received messages from all neighbors

10-708 – ©Carlos Guestrin 2006

29

Belief from message

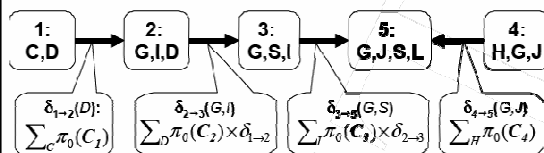

■ Theorem: When clique C_i is ready

- Received messages from all neighbors
- Belief $\pi_i(C_i)$ is product of initial factor with messages:


10-708 – ©Carlos Guestrin 2006

30


Choice of root

- Message does not depend on root!!!

Root: node 5

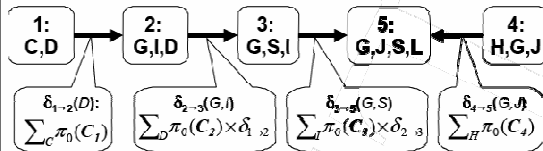


Root: node 3

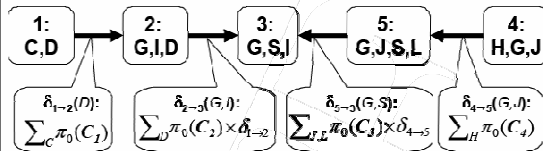


“Cache” computation: Obtain belief for all roots in linear time!!

Shafer-Shenoy Algorithm (a.k.a. VE in clique tree for all roots)

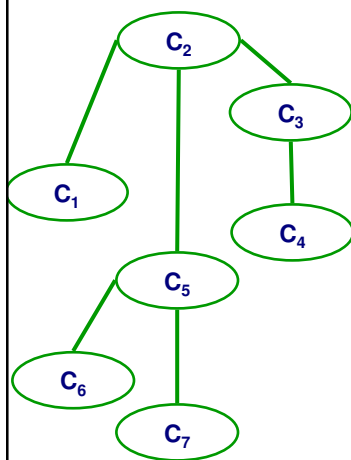

- Clique C_i ready to transmit to neighbor C_j if received messages from all neighbors but j
 - Leaves are always ready to transmit
- While $\exists C_i$ ready to transmit to C_j
 - Send message $\delta_{i \rightarrow j}$
- Complexity: Linear in # cliques
 - One message sent each direction in each edge
- Corollary: At convergence
 - Every clique has correct belief

Calibrated Clique tree



- Initially, neighboring nodes don't agree on "distribution" over separators
- **Calibrated clique tree:**
 - At convergence, tree is *calibrated*
 - Neighboring nodes agree on distribution over separator

10-708 – ©Carlos Guestrin 2006

33

Answering queries with clique trees

- Query within clique
- Incremental updates – Observing evidence $Z=z$
 - Multiply some clique by indicator $\mathbf{1}(Z=z)$
- Query outside clique
 - Use variable elimination!

10-708 – ©Carlos Guestrin 2006

34

Message passing with division



- Computing messages by multiplication:

- Computing messages by division:


10-708 – ©Carlos Guestrin 2006

35

Lauritzen-Spiegelhalter Algorithm (a.k.a. belief propagation)

Simplified description
see reading for details

- Initialize all separator potentials to 1
 - $\mu_{ij} \leftarrow 1$
- All messages ready to transmit
- While $\exists \delta_{i \rightarrow j}$ ready to transmit
 - $\mu_{ij}' \leftarrow$
 - If $\mu_{ij}' \neq \mu_{ij}$
 - $\delta_{i \rightarrow j} \leftarrow$
 - $\pi_j \leftarrow \pi_j \times \delta_{i \rightarrow j}$
 - $\mu_{ij} \leftarrow \mu_{ij}'$
 - $\forall$ neighbors k of j , $k \neq i$, $\delta_{j \rightarrow k}$ ready to transmit
- Complexity: Linear in # cliques
 - for the “right” schedule over edges (leaves to root, then root to leaves)
- **Corollary:** At convergence, every clique has correct belief



10-708 – ©Carlos Guestrin 2006

36

VE versus BP in clique trees

- VE messages (the one that multiplies)
- BP messages (the one that divides)

10-708 – ©Carlos Guestrin 2006

37

Clique tree invariant

- **Clique tree potential:**
 - Product of clique potentials divided by separators potentials
- **Clique tree invariant:**
 - $P(\mathbf{X}) = \pi_T(\mathbf{X})$

10-708 – ©Carlos Guestrin 2006

38

Belief propagation and clique tree invariant

- **Theorem:** Invariant is maintained by BP algorithm!
- BP reparameterizes clique potentials and separator potentials
 - At convergence, potentials and messages are marginal distributions

10-708 – ©Carlos Guestrin 2006

39

Subtree correctness

- **Informed message** from i to j , if all messages into i (other than from j) are informed
 - Recursive definition (leaves always send informed messages)
- **Informed subtree:**
 - All incoming messages informed
- **Theorem:**
 - Potential of connected informed subtree T' is marginal over $\text{scope}[T']$
- **Corollary:**
 - At convergence, clique tree is *calibrated*
 - $\pi_i = P(\text{scope}[\pi_i])$
 - $\mu_{ij} = P(\text{scope}[\mu_{ij}])$

10-708 – ©Carlos Guestrin 2006

40

Clique trees versus VE

- Clique tree advantages
 - Multi-query settings
 - Incremental updates
 - Pre-computation makes complexity explicit
- Clique tree disadvantages
 - Space requirements – no factors are “deleted”
 - Slower for single query
 - Local structure in factors may be lost when they are multiplied together into initial clique potential

10-708 – ©Carlos Guestrin 2006

41

Clique tree summary

- Solve marginal queries for all variables in only twice the cost of query for one variable
- Cliques correspond to maximal cliques in induced graph
- Two message passing approaches
 - VE (the one that multiplies messages)
 - BP (the one that divides by old message)
- Clique tree invariant
 - Clique tree potential is always the same
 - We are only reparameterizing clique potentials
- Constructing clique tree for a BN
 - from elimination order
 - from triangulated (chordal) graph
- Running time (only) exponential in size of largest clique
 - Solve **exactly** problems with thousands (or millions, or more) of variables, and cliques with tens of nodes (or less)

10-708 – ©Carlos Guestrin 2006

42