Example Assembly Problems

Problem 1:

Consider the following pairs of C functions and assembly code. Fill in the missing instructions in the assembly code (one instruction per a blank). Your answers should be syntactically correct assembly.

```
int goose()
{
  return -4;
}
```

```
goose:
        pushl   %ebp
        movl    %esp, %ebp

        _____________________________
        popl    %ebp
        ret
```

```
int cow(int a, int b)
{
 return a - b;
}
```

```
cow:
        pushl   %ebp
        movl    %esp, %ebp
        movl    8(%ebp), %eax

        _____________________________
        popl    %ebp
        ret
```

```
int pig(int a)
{
  return a*3;
}
```

```
pig:
        pushl   %ebp
        movl    %esp, %ebp
        movl    8(%ebp), %eax

        leal    _________________________
        popl    %ebp
        ret
```

```
int sheep(int c)
{
  if(c < 0)
   return 1;
  else
   return 0;
}
```

```
sheep:
        pushl   %ebp
        movl    %esp, %ebp
        movl    8(%ebp), %eax
        ---------------------------
        popl    %ebp
        ret
```

```
int duck(int a)
{
  if(sheep(a))
   return -a;
  else
   return a;
}
```

```
duck:
        pushl   %ebp
        movl    %esp, %ebp
        pushl   %ebx
        movl    8(%ebp), %ebx
        ---------------------------
        call    sheep
        movl    %ebx, %edx
        ---------------------------
        je      .L6
        negl    %edx
.L6:
        movl    %edx, %eax
        addl    $4, %esp
        popl    %ebx
        popl    %ebp
        ret
```

Problem 2:

This problem tests your understanding of IA32 condition codes.

A. Consider the instruction:

```
cmpl a,b
```

Write in the values (0 if clear, 1 if set) of the condition flags if this instruction is executed with the given values of *a* and *b*.

a	*b*	Zero Flag (ZF)	Sign Flag (SF)	Carry Flag (CF)	Overflow Flag (OF)
-4	0xfffffffc				
4	0xfffffffc				
-1	1				
2	0x80000000				
0x7fffffff	0x80000000				
0x80000000	0x7fffffff				
1	0x7fffffff				
0x80000000	0x80000000				
0x7fffffff	0xffffffff				

B. On an IA32 architecture, compare and test instructions aren't the only instructions which set the condition codes and conditional branches aren't the only instructions which read the condition codes. Specifically, the `add` instruction sets the condition codes based on the result and the add with carry instruction (`adc`) computes the sum of its two operands and the carry flag. That is, `adcl %edx,%eax` computes `eax = eax + edx + CF`. Briefly describe a specific instance where the compiler can make use of this combination of instructions.

Problem 3:

Consider the following C functions and assembly code:

```
int fun1(int i, int j)
{
  if(i+3 != j)
   return i+3;
  else
   return j*16;
}

int fun2(int i, int j)
{
  if(i+3 != (unsigned)j)
   return i;
  else
   return j*4;
}

int fun3(int i, int j)
{
  if(i+3 <= (unsigned)j)
   return i;
  else
   return j>>2;
}
```

```
        pushl   %ebp
        movl    %esp, %ebp
        movl    8(%ebp), %eax
        movl    12(%ebp), %ecx
        leal    3(%eax), %edx
        cmpl    %ecx, %edx
        jne     .L4
        leal    0(,%ecx,4), %eax
.L4:
        popl    %ebp
        ret
```

Which of the functions compiled into the assembly code shown?

Problem 4:

Consider the following C function and assembly code fragments:

```
int woohoo(int a, int r)
{
 int ret = 0;
 switch(a)
 {
   case 11:
    ret = 4;
    break;
   case 22:
   case 55:
    ret = 7;
    break;
   case 33:
   case 44:
    ret = 11;
    break;

   default:
    ret = 1;
 }
 return ret;
}
```

Fragment 1

```
woohoo:
        pushl   %ebp
        movl    %esp, %ebp
        movl    8(%ebp), %edx
        movl    $0, %ecx
        cmpl    $11, %edx
        jne     .L2
        movl    $4, %ecx
        jmp     .L3
.L2:
        cmpl    $22, %edx
        jne     .L3
        movl    $7, %ecx
.L3:
        cmpl    $55, %edx
        jne     .L5
        movl    $7, %ecx
.L5:
        cmpl    $33, %edx
        sete    %al
        cmpl    $44, %edx
        sete    %dl
        orl     %edx, %eax
        testb   $1, %al
        je      .L6
        movl    $11, %ecx
.L6:
        movl    %ecx, %eax
        popl    %ebp
        ret
```

Fragment 2

```
woohoo:
        pushl   %ebp
        movl    $1, %eax
        movl    %esp, %ebp
        movl    8(%ebp), %edx
        decl    %edx
        cmpl    $4, %edx
        ja      .L2
        jmp     *.L9(,%edx,4)
        .section        .rodata
        .align 4
        .align 4
.L9:
        .long   .L3
        .long   .L5
        .long   .L7
        .long   .L7
        .long   .L5
        .text
.L3:
        movl    $4, %eax
        jmp     .L2
.L5:
        movl    $7, %eax
        jmp     .L2
.L7:
        movl    $11, %eax
.L2:
        popl    %ebp
        ret
```

Fragment 3

```
woohoo:
        pushl   %ebp
        movl    %esp,%ebp
        movl    8(%ebp),%eax
        subl    $11,%eax
        je      .L6
        subl    $11,%eax
        je      .L7
        subl    $11,%eax
        je      .L8
        subl    $11,%eax
        je      .L8
        subl    $11,%eax
        je      .L7
        jmp     .L9
.L6:
        movl    $4,%eax
        jmp     .L4
.L7:
        movl    $7,%eax
        jmp     .L4
.L8:
        movl    $11,%eax
        jmp     .L4
.L9:
        movl    $1,%eax
.L4:
        ret
```

Which of the assembly code fragments matches the C function shown?

Problem 5:

This problem tests your understanding of how `for` loops in C relate to IA32 machine code. Consider the following IA32 assembly code for a procedure `dog()`:

```
dog:
        pushl   %ebp
        movl    %esp, %ebp
        movl    12(%ebp), %ecx
        movl    $1, %eax
        movl    8(%ebp), %edx
        cmpl    %ecx, %edx
        jge     .L7
.L5:
        imull   %edx, %eax
        addl    $2, %edx
        cmpl    %ecx, %edx
        jl      .L5
.L7:
        popl    %ebp
        ret
```

Based on the assembly code, fill in the blanks below in its corresponding C source code. (Note: you may only use symbolic variables x, y, i, and $result$, from the source code in your expressions below — do *not* use register names.)

```
int dog(int x, int y)
{
  int i, result;

  result = _________;

  for (i = _________; _______________; _________)  {

       result = ____________________;
     }
  }
  return result;
}
```

Problem 6:

This problem tests your understanding of how `while` loops in C relate to IA32 machine code. Consider the following IA32 assembly code for a procedure `cat()`:

```
cat:
        pushl   %ebp
        movl    %esp, %ebp
        movl    8(%ebp), %ecx
        pushl   %ebx
        xorl    %ebx, %ebx
        movl    12(%ebp), %eax
        decl    %ecx
        cmpl    $-1, %ecx
        je      .L6
        movl    %ecx, %edx
        imull   %eax, %edx
        negl    %eax
        .p2align 4,,15
.L4:
        decl    %ecx
        addl    %edx, %ebx
        addl    %eax, %edx
        cmpl    $-1, %ecx
        jne     .L4
.L6:
        movl    %ebx, %eax
        popl    %ebx
        popl    %ebp
        ret
```

Based on the assembly code, fill in the blanks below in its corresponding C source code. (Note: you may only use symbolic variables x, y, i, and ret, from the source code in your expressions below — do *not* use register names.)

```
int cat(int x, int y) {
  int i, ret;

  ret = _________;

  i = _________;

  while(_______________)
  {
    ret = ____________________________;
  }
  return ret;
}
```

Problem 7:

This problem tests your understanding of how `switch` statements in C relate to IA32 machine code. Consider the following IA32 assembly code for a procedure `frog()`:

```
frog:
        pushl   %ebp
        movl    %esp, %ebp
        movl    8(%ebp), %edx
        movl    12(%ebp), %eax
        cmpl    $7, %edx
        ja      .L8
        jmp     *.L9(,%edx,4)
        .section        .rodata
        .align 4
        .align 4
.L9:
        .long   .L8
        .long   .L4
        .long   .L8
        .long   .L5
        .long   .L8
        .long   .L4
        .long   .L6
        .long   .L2
        .text
.L4:
        movl    $7, %eax
        jmp     .L2
.L5:
        decl    %eax
        jmp     .L2
.L6:
        incl    %eax
        jmp     .L2
.L8:
        movl    $-1, %eax
.L2:
        popl    %ebp
        ret
```

Based on the assembly code, fill in the blanks below in its corresponding C source code. (Note: you may only use symbolic variables a, b, and $result$, from the source code in your expressions below — do *not* use register names.)

```
int frog(int a, int b)
{
  int result;

  switch(_______)
  {
   case _______:

   case _______:

     result = _______;
     break;

   case _______:

     result = ___________;
     break;

   case _______:

     __________;

   case 7:
     result = _______;
     break;

   default:

    result = _______;
  }

  return result;
}
```

Problem 8:

This problem tests your understanding of the stack discipline and byte ordering. Consider the following C functions and assembly code:

```
void top_secret(int len)
{
    char buf[8];
    scanf("%s", buf);
    if(strlen(buf) != len)
         exit(1);
}

int main()
{
    printf("Enter a passphrase: ");
    top_secret(8);
    printf("The chicken flies at midnight!\n");
    return 0;
}
```

```
08048530 <top_secret>:
 8048530:       55                      push   %ebp
 8048531:       89 e5                   mov    %esp,%ebp
 8048533:       83 ec 08                sub    $0x8,%esp
 8048536:       8d 45 f8                lea    0xfffffff8(%ebp),%eax
 8048539:       50                      push   %eax
 804853a:       68 40 86 04 08          push   $0x8048640
 804853f:       e8 44 fe ff ff          call   8048388 <scanf>
 8048544:       8d 45 f8                lea    0xfffffff8(%ebp),%eax
 8048547:       50                      push   %eax
 8048548:       e8 5b fe ff ff          call   80483a8 <strlen>
 804854d:       83 c4 0c                add    $0xc,%esp
 8048550:       3b 45 08                cmp    0x8(%ebp),%eax
 8048553:       74 0b                   je     8048560 <top_secret+0x30>
 8048555:       6a 01                   push   $0x1
 8048557:       e8 8c fe ff ff          call   80483e8 <exit>
 804855c:       8d 74 26 00             lea    0x0(%esi,1),%esi
 8048560:       89 ec                   mov    %ebp,%esp
 8048562:       5d                      pop    %ebp
 8048563:       c3                      ret
```

Here are some notes to help you work the problem:

- `scanf("%s", buf)` reads an input string from the standard input stream (stdin) and stores it at address `buf` (including the terminating `\0` character). It does **not** check the size of the destination buffer.
- `strlen(s)` returns the length of the null-terminated string `s`.
- `exit(1)` halts execution of the current process without returning.
- Recall that Linux/x86 machines are Little Endian.

You may find the following diagram helpful to work out your answers.

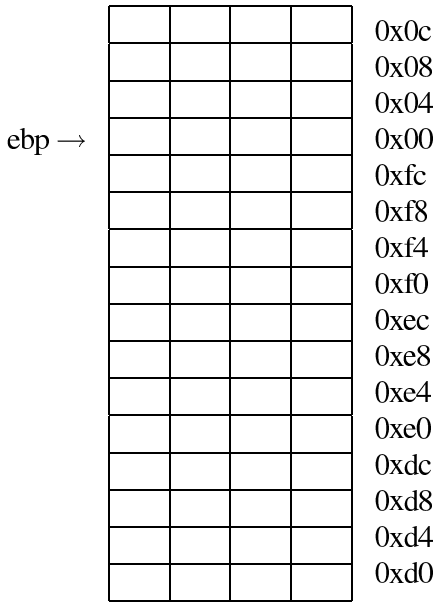

A. **Circle the address** (relative to `ebp`) of the following items. Assume that the code has executed up to (but not including) the call to `scanf` at `0x804853f`).

return address:	0xc	0x08	0x04	0x00	0xfc	0xf8	0xf4	0xf0	0xec	0xe8	0xe4	0xe0
saved `%ebp`:	0xc	0x08	0x04	0x00	0xfc	0xf8	0xf4	0xf0	0xec	0xe8	0xe4	0xe0
len:	0xc	0x08	0x04	0x00	0xfc	0xf8	0xf4	0xf0	0xec	0xe8	0xe4	0xe0
`&buf`:	0xc	0x08	0x04	0x00	0xfc	0xf8	0xf4	0xf0	0xec	0xe8	0xe4	0xe0
`%esp`:	0xc	0x08	0x04	0x00	0xfc	0xf8	0xf4	0xf0	0xec	0xe8	0xe4	0xe0
&"%s":	0xc	0x08	0x04	0x00	0xfc	0xf8	0xf4	0xf0	0xec	0xe8	0xe4	0xe0

B. Let us enter the string "`chickenstonight`" (not including the quotes) as a password. Inside the `top_secret` function `scanf` will read this string from stdin, writing its value into `buf`. Afterwards what will be the value in the 4-byte word pointed to by `%ebp`? You should answer in hexadecimal notation.

The following table shows the hexadecimal value for relevant ASCII characters.

Character	Hex value	Character	Hex value
`'c'`	`0x63`	`'h'`	`0x68`
`'i'`	`0x69`	`'k'`	`0x6b`
`'e'`	`0x65`	`'n'`	`0x6e`
`'s'`	`0x73`	`'t'`	`0x74`
`'o'`	`0x6f`	`'g'`	`0x67`
`'h'`	`0x68`	`\0`	`0x00`

`(%ebp) = 0x`_____

C. The function `top_secret` is called from a 5-byte `call` instruction at the address 0x804857f inside of `main`. Before the first instruction of `top_secret` (0x08048530) is executed, the registers contain the following values:

Register	*Hex Value*
eax	0x14
ecx	0x0
edx	0x0
ebx	0x40157770
esp	0xbffff98c
ebp	0xbffff998
esi	0x40015e8c
edi	0xbffffa04
eip	0x8048530

The program continues to execute until it hits the `lea` instruction at 0x8048544 (right after the call to tt scanf). The user inputs 'chickens'. Fill in the full 4-byte hexadecimal values for the following memory locations. If a value is cannot be computed from the information given, write "unknown".

Address	*Hex Value*
0xbffff990	
0xbffff98c	
0xbffff988	
0xbffff984	
0xbffff980	
0xbffff97c	
0xbffff978	

Problem 9:

This problem tests your understanding of the IA32 calling convention. Consider the following C code and corresponding assembly. Fill in the missing instructions (one instruction per a blank line).

```
int global;

int bear(int i, int j, int k)
{
  for( ; i < j; i++)
  {
   global += k*i;
  }
  return global;
}
```

```
bear:
        pushl   %ebp
        movl    %esp, %ebp

        _____________________

        _____________________
        movl    8(%ebp), %edx
        movl    12(%ebp), %ebx
        movl    16(%ebp), %esi
        cmpl    %ebx, %edx
        jge     .L7
        movl    global, %ecx
.L5:
        movl    %esi, %eax
        imull   %edx, %eax
        leal    (%ecx,%eax), %ecx
        incl    %edx
        cmpl    %ebx, %edx
        jl      .L5
        movl    %ecx, global
.L7:

        _____________________

        _____________________

        _____________________
        popl    %ebp
        ret
```

Problem 10:

The following problem will test your understanding of stack frames. It is based on the following function:

```
int scrat(int val, int n)
{
  int result = 0;
  if(n > 0)
    result = val + scrat(val, n-1);
  return result;
}
```

A compiler on an IA-32 Linux machine produces the following object code for this function, which we have disassembled (using `objdump`) back into assembly code:

```
 08048390 <scrat>:
  8048390:       55                      push   %ebp
->8048391:       89 e5                   mov    %esp,%ebp
  8048393:       53                      push   %ebx
  8048394:       83 ec 08                sub    $0x8,%esp
  8048397:       8b 5d 08                mov    0x8(%ebp),%ebx
  804839a:       8b 45 0c                mov    0xc(%ebp),%eax
  804839d:       ba 00 00 00 00          mov    $0x0,%edx
  80483a2:       85 c0                   test   %eax,%eax
  80483a4:       7e 10                   jle    80483b6 <scrat+0x26>
  80483a6:       48                      dec    %eax
  80483a7:       89 44 24 04             mov    %eax,0x4(%esp,1)
  80483ab:       89 1c 24                mov    %ebx,(%esp,1)
  80483ae:       e8 dd ff ff ff          call   8048390 <scrat>
  80483b3:       8d 14 18                lea    (%eax,%ebx,1),%edx
  80483b6:       89 d0                   mov    %edx,%eax
  80483b8:       83 c4 08                add    $0x8,%esp
  80483bb:       5b                      pop    %ebx
  80483bc:       5d                      pop    %ebp
  80483bd:       c3                      ret
```

A. On the next page, you have the diagram of the stack immediately after some function makes a call to `scrat` and the very first instruction of `scrat` has executed (the next instruction to be executed is denoted with an arrow (`->`). The value of register `%esp` at this point is `0xbffff998`. For each of the numeric values shown in the table, give a short description of the value. If the value has a corresponding variable in the original C source code, use the name of the variable as its description.

B. Assume that `scrat` runs until it reaches the position denoted with an arrow (`->`) again. In the table on the next stage, fill in the updated stack. Use a numeric value (if possible, else write `n/a`) and provide a short description of the value. Cross out any stack space not used.

C. Which instruction (give its address) computes the result of addition?

`0x`_____

Address	Numeric Value	Comments/Description
0xbffff9a4	0x00000003	
0xbffff9a0	0x00000021	
0xbffff99c	0x080483db	
0xbffff998	0xbffff9a8	
0xbffff994		
0xbffff990		
0xbffff98c		
0xbffff988		
0xbffff984		
0xbffff980		
0xbffff97c		
0xbffff978		
0xbffff974		
0xbffff970		
0xbffff97c		
0xbffff978		
0xbffff974		