

Machine-Level Programming I: Basics

15-213/18-213: Introduction to Computer Systems
5th Lecture, Jan. 31, 2012

Instructors:

Todd C. Mowry & Anthony Rowe

Today: Machine Programming I: Basics

- **History of Intel processors and architectures**
- C, assembly, machine code
- **Assembly Basics: Registers, operands, move**
- Intro to x86-64

Intel x86 Processors

- **Totally dominate laptop/desktop/server market**


- **Evolutionary design**
 - Backwards compatible up until 8086, introduced in 1978
 - Added more features as time goes on

- **Complex instruction set computer (CISC)**
 - Many different instructions with many different formats
 - But, only small subset encountered with Linux programs
 - Hard to match performance of Reduced Instruction Set Computers (RISC)
 - But, Intel has done just that!
 - In terms of speed. Less so for low power.

Intel x86 Evolution: Milestones

<i>Name</i>	<i>Date</i>	<i>Transistors</i>	<i>MHz</i>
■ 8086	1978	29K	5-10
<ul style="list-style-type: none"> ▪ First 16-bit processor. Basis for IBM PC & DOS ▪ 1MB address space 			
■ 386	1985	275K	16-33
<ul style="list-style-type: none"> ▪ First 32 bit processor , referred to as IA32 ▪ Added “flat addressing” ▪ Capable of running Unix ▪ 32-bit Linux/gcc uses no instructions introduced in later models 			
■ Pentium 4F	2004	125M	2800-3800
<ul style="list-style-type: none"> ▪ First 64-bit processor, referred to as x86-64 			
■ Core i7	2008	731M	2667-3333
<ul style="list-style-type: none"> ▪ Our shark machines 			

Intel x86 Processors: Overview

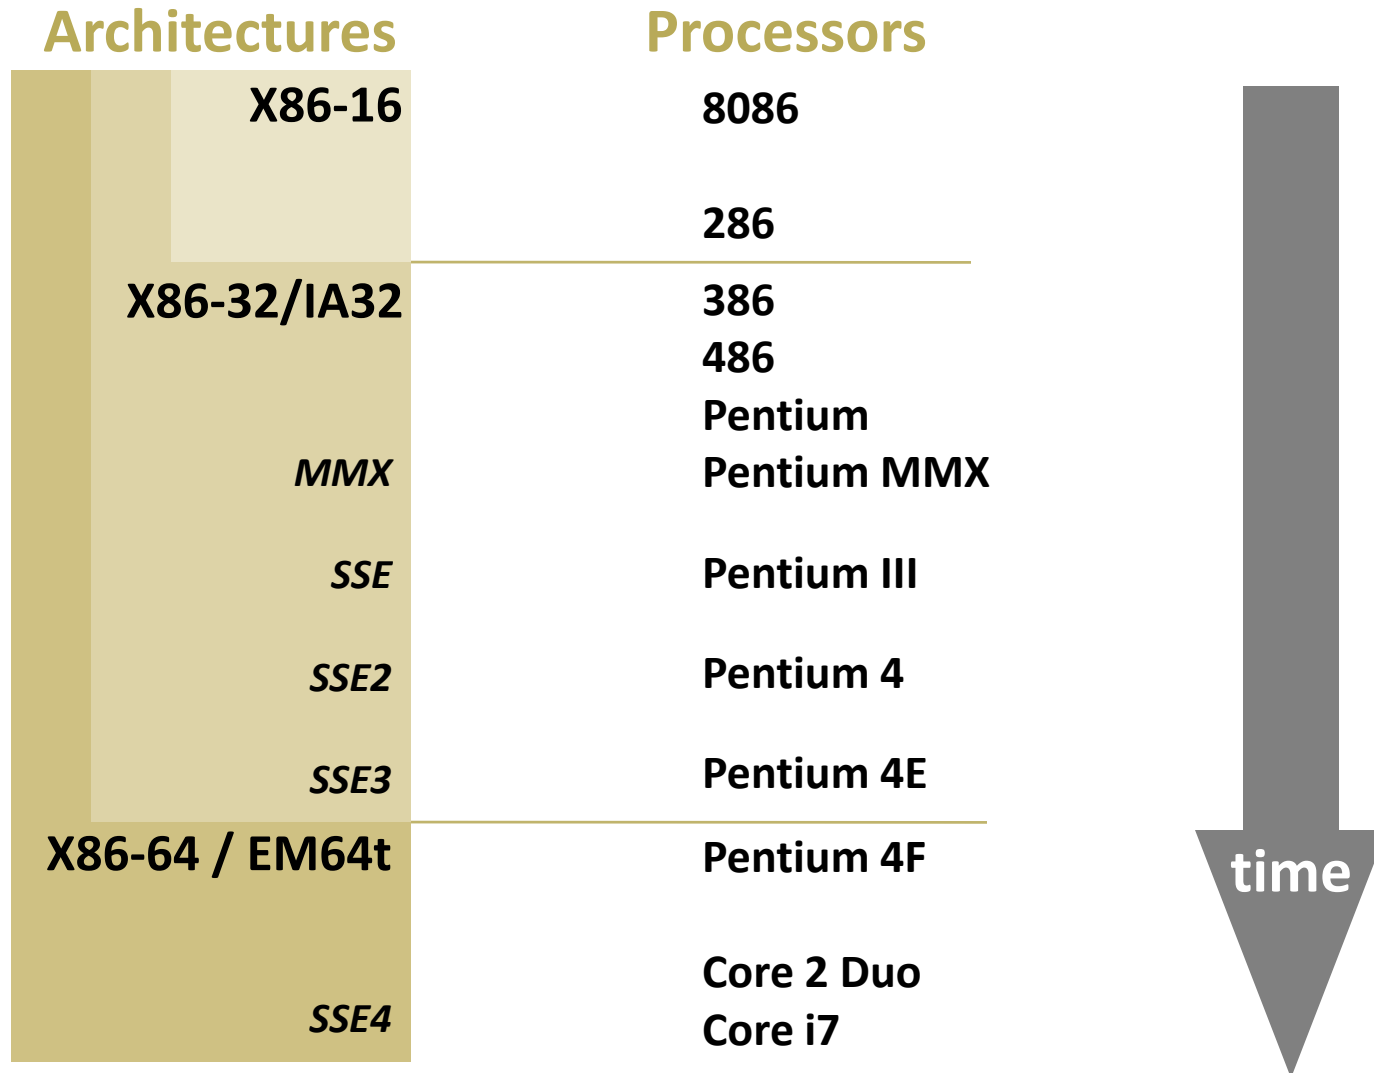


IA: often redefined as latest Intel architecture

Intel x86 Processors, contd.

■ Machine Evolution

■ 386	1985	0.3M
■ Pentium	1993	3.1M
■ Pentium/MMX	1997	4.5M
■ PentiumPro	1995	6.5M
■ Pentium III	1999	8.2M
■ Pentium 4	2001	42M
■ Core 2 Duo	2006	291M
■ Core i7	2008	731M

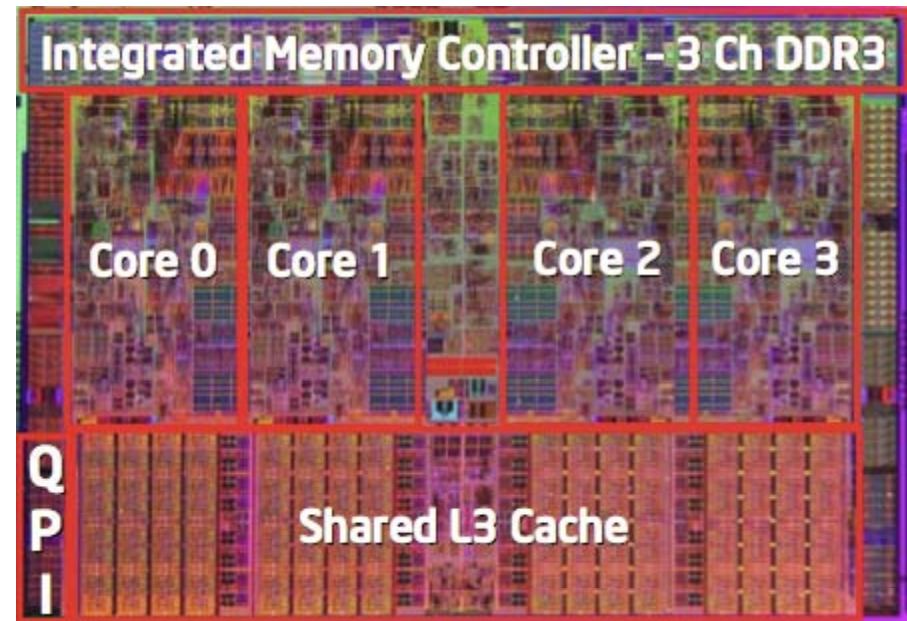

■ Added Features

- Instructions to support multimedia operations
 - Parallel operations on 1, 2, and 4-byte data, both integer & FP
- Instructions to enable more efficient conditional operations

■ Linux/GCC Evolution

- Two major steps: 1) support 32-bit 386. 2) support 64-bit x86-64

x86 Clones: Advanced Micro Devices (AMD)

■ Historically

- AMD has followed just behind Intel
- A little bit slower, a lot cheaper

■ Then

- Recruited top circuit designers from Digital Equipment Corp. and other downward trending companies
- Built Opteron: tough competitor to Pentium 4
- Developed x86-64, their own extension to 64 bits

Intel's 64-Bit

- **Intel Attempted Radical Shift from IA32 to IA64**
 - Totally different architecture (Itanium)
 - Executes IA32 code only as legacy
 - Performance disappointing
- **AMD Stepped in with Evolutionary Solution**
 - x86-64 (now called "AMD64")
- **Intel Felt Obligated to Focus on IA64**
 - Hard to admit mistake or that AMD is better
- **2004: Intel Announces EM64T extension to IA32**
 - Extended Memory 64-bit Technology
 - Almost identical to x86-64!
- **All but low-end x86 processors support x86-64**
 - But, lots of code still runs in 32-bit mode

Our Coverage

■ IA32

- The traditional x86
- `shark> gcc -m32 hello.c`

■ x86-64

- The emerging standard
- `shark> gcc hello.c`
- `shark> gcc -m64 hello.c`

■ Presentation

- Book presents IA32 in Sections 3.1—3.12
- Covers x86-64 in 3.13
- We will cover both simultaneously
- Some labs will be based on x86-64, others on IA32


Today: Machine Programming I: Basics

- History of Intel processors and architectures
- C, assembly, machine code
- Assembly Basics: Registers, operands, move
- Intro to x86-64

Definitions

- **Architecture:** (also ISA: instruction set architecture) The parts of a processor design that one needs to understand to write assembly code.
 - Examples: instruction set specification, registers.
- **Microarchitecture:** Implementation of the architecture.
 - Examples: cache sizes and core frequency.
- **Example ISAs (Intel): x86, IA**

Assembly Programmer's View

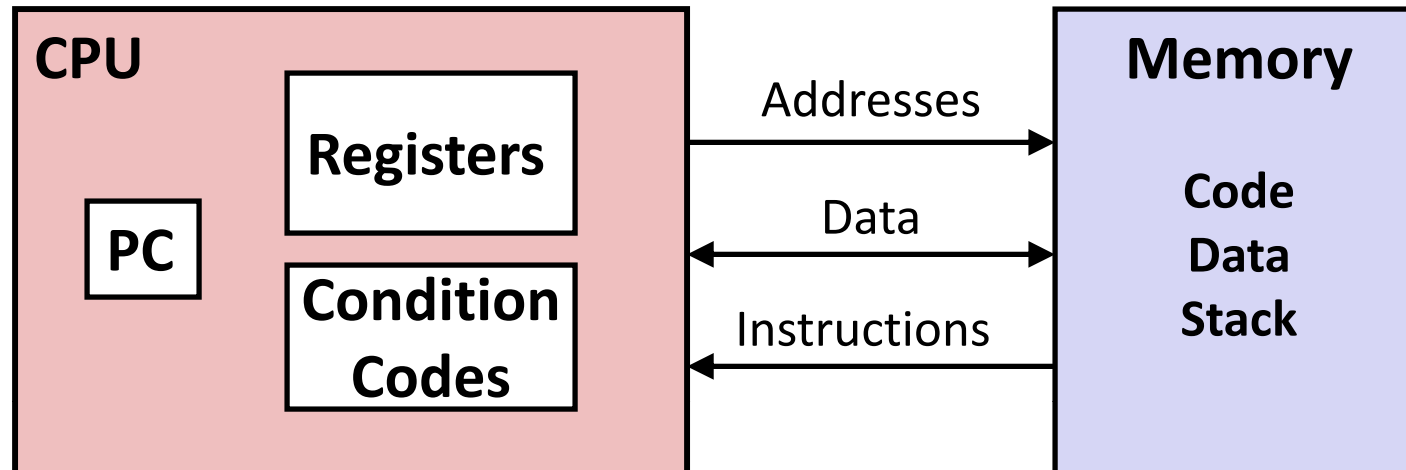


Programmer-Visible State

- **PC: Program counter**
 - Address of next instruction
 - Called "EIP" (IA32) or "RIP" (x86-64)
- **Register file**
 - Heavily used program data
- **Condition codes**
 - Store status information about most recent arithmetic operation
 - Used for conditional branching
- **Memory**
 - Byte addressable array
 - Code and user data
 - Stack to support procedures

Turning C into Object Code

- Code in files `p1.c` `p2.c`
- Compile with command: `gcc -O1 p1.c p2.c -o p`
 - Use basic optimizations (`-O1`)
 - Put resulting binary in file `p`

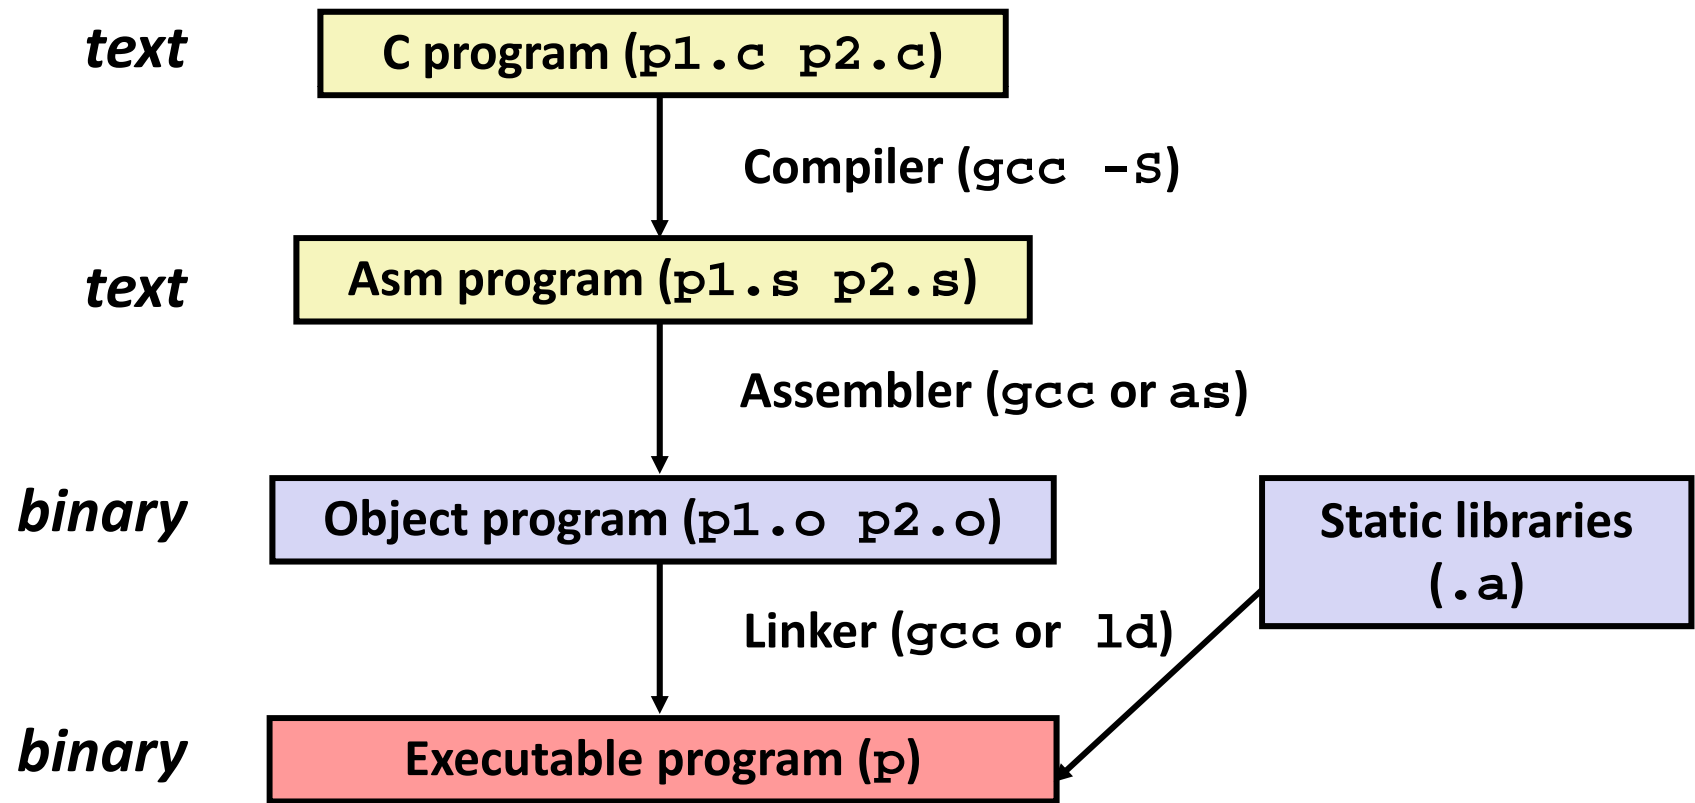


Compiling Into Assembly

C Code

```
int sum(int x, int y)
{
    int t = x+y;
    return t;
}
```

Generated IA32 Assembly

```
sum:
    pushl %ebp
    movl %esp,%ebp
    movl 12(%ebp),%eax
    addl 8(%ebp),%eax
    popl %ebp
    ret
```



Some compilers use
instruction "leave"

Obtain with command

```
/usr/local/bin/gcc -O1 -S code.c
```

Produces file `code.s`

Assembly Characteristics: Data Types

- **“Integer” data of 1, 2, or 4 bytes**
 - Data values
 - Addresses (untyped pointers)
- **Floating point data of 4, 8, or 10 bytes**
- **No aggregate types such as arrays or structures**
 - Just contiguously allocated bytes in memory

Assembly Characteristics: Operations

- **Perform arithmetic function on register or memory data**

- **Transfer data between memory and register**
 - Load data from memory into register
 - Store register data into memory

- **Transfer control**
 - Unconditional jumps to/from procedures
 - Conditional branches

Object Code

Code for `sum`

```
0x401040 <sum>:
  0x55
  0x89
  0xe5
  0x8b
  0x45
  0x0c
  0x03
  0x45
  0x08
  0x5d
  0xc3
```

- Total of 11 bytes
- Each instruction 1, 2, or 3 bytes
- Starts at address 0x401040

■ Assembler

- Translates `.s` into `.o`
- Binary encoding of each instruction
- Nearly-complete image of executable code
- Missing linkages between code in different files

■ Linker

- Resolves references between files
- Combines with static run-time libraries
 - E.g., code for `malloc`, `printf`
- Some libraries are *dynamically linked*
 - Linking occurs when program begins execution

Machine Instruction Example

```
int t = x+y;
```

```
addl 8(%ebp),%eax
```

Similar to expression:

```
x += y
```

More precisely:

```
int eax;
```

```
int *ebp;
```

```
eax += ebp[2]
```

```
0x80483ca: 03 45 08
```

■ C Code

- Add two signed integers

■ Assembly

- Add 2 4-byte integers
 - “Long” words in GCC parlance
 - Same instruction whether signed or unsigned
- Operands:
 - x**: Register **%eax**
 - y**: Memory **M[%ebp+8]**
 - t**: Register **%eax**

– Return function value in **%eax**

■ Object Code

- 3-byte instruction
- Stored at address **0x80483ca**

Disassembling Object Code

Disassembled

```
080483c4 <sum>:  
80483c4: 55          push   %ebp  
80483c5: 89 e5      mov    %esp,%ebp  
80483c7: 8b 45 0c   mov    0xc(%ebp),%eax  
80483ca: 03 45 08   add   0x8(%ebp),%eax  
80483cd: 5d        pop   %ebp  
80483ce: c3        ret
```

■ Disassembler

`objdump -d p`

- Useful tool for examining object code
- Analyzes bit pattern of series of instructions
- Produces approximate rendition of assembly code
- Can be run on either a `.out` (complete executable) or `.o` file

Alternate Disassembly

Object

```
0x401040:
  0x55
  0x89
  0xe5
  0x8b
  0x45
  0x0c
  0x03
  0x45
  0x08
  0x5d
  0xc3
```

Disassembled

```
Dump of assembler code for function sum:
0x080483c4 <sum+0>:      push   %ebp
0x080483c5 <sum+1>:      mov    %esp,%ebp
0x080483c7 <sum+3>:      mov    0xc(%ebp),%eax
0x080483ca <sum+6>:      add   0x8(%ebp),%eax
0x080483cd <sum+9>:      pop   %ebp
0x080483ce <sum+10>:     ret
```

■ Within gdb Debugger

```
gdb p
```

```
disassemble sum
```

- Disassemble procedure

```
x/11xb sum
```

- Examine the 11 bytes starting at sum

What Can be Disassembled?

```
% objdump -d WINWORD.EXE
```

```
WINWORD.EXE: file format pei-i386
```

```
No symbols in "WINWORD.EXE".
```

```
Disassembly of section .text:
```

```
30001000 <.text>:
```

```
30001000: 55                push    %ebp
30001001: 8b ec            mov     %esp,%ebp
30001003: 6a ff            push   $0xffffffff
30001005: 68 90 10 00 30  push   $0x30001090
3000100a: 68 91 dc 4c 30  push   $0x304cdc91
```

- Anything that can be interpreted as executable code
- Disassembler examines bytes and reconstructs assembly source

Today: Machine Programming I: Basics

- History of Intel processors and architectures
- C, assembly, machine code
- **Assembly Basics: Registers, operands, move**
- Intro to x86-64

Integer Registers (IA32)

Origin
(mostly obsolete)

general purpose	%eax	%ax	%ah	%al	<i>accumulate</i>
	%ecx	%cx	%ch	%cl	<i>counter</i>
	%edx	%dx	%dh	%dl	<i>data</i>
	%ebx	%bx	%bh	%bl	<i>base</i>
	%esi	%si			<i>source index</i>
	%edi	%di			<i>destination index</i>
	%esp	%sp			<i>stack pointer</i>
	%ebp	%bp			<i>base pointer</i>

16-bit virtual registers
(backwards compatibility)

Moving Data: IA32

■ Moving Data

`movl Source, Dest:`

■ Operand Types

- **Immediate:** Constant integer data
 - Example: `$0x400`, `$-533`
 - Like C constant, but prefixed with ``$'`
 - Encoded with 1, 2, or 4 bytes
- **Register:** One of 8 integer registers
 - Example: `%eax`, `%edx`
 - But `%esp` and `%ebp` reserved for special use
 - Others have special uses for particular instructions
- **Memory:** 4 consecutive bytes of memory at address given by register
 - Simplest example: `(%eax)`
 - Various other “address modes”

`%eax`

`%ecx`

`%edx`

`%ebx`

`%esi`

`%edi`

`%esp`

`%ebp`

movl Operand Combinations

	Source	Dest	Src, Dest	C Analog
movl	Imm	Reg	movl \$0x4, %eax	temp = 0x4;
		Mem	movl \$-147, (%eax)	*p = -147;
	Reg	Reg	movl %eax, %edx	temp2 = temp1;
		Mem	movl %eax, (%edx)	*p = temp;
	Mem	Reg	movl (%eax), %edx	temp = *p;

Cannot do memory-memory transfer with a single instruction

Simple Memory Addressing Modes

■ Normal (R) Mem[Reg[R]]

- Register R specifies memory address

```
movl (%ecx), %eax
```

■ Displacement D(R) Mem[Reg[R]+D]

- Register R specifies start of memory region
- Constant displacement D specifies offset

```
movl 8(%ebp), %edx
```

Using Simple Addressing Modes

```
void swap(int *xp, int *yp)
{
    int t0 = *xp;
    int t1 = *yp;
    *xp = t1;
    *yp = t0;
}
```

swap:

pushl %ebp	}	Set Up
movl %esp,%ebp		
pushl %ebx		
movl 8(%ebp), %edx	}	Body
movl 12(%ebp), %ecx		
movl (%edx), %ebx		
movl (%ecx), %eax		
movl %eax, (%edx)		
movl %ebx, (%ecx)		
popl %ebx	}	Finish
popl %ebp		
ret		

Using Simple Addressing Modes

```
void swap(int *xp, int *yp)
{
    int t0 = *xp;
    int t1 = *yp;
    *xp = t1;
    *yp = t0;
}
```

swap:

```

pushl %ebp
movl  %esp,%ebp
pushl %ebx
} Set Up

movl  8(%ebp), %edx
movl  12(%ebp), %ecx
movl  (%edx), %ebx
movl  (%ecx), %eax
movl  %eax, (%edx)
movl  %ebx, (%ecx)
} Body


popl  %ebx
popl  %ebp
ret
} Finish
```

Understanding Swap

```
void swap(int *xp, int *yp)
{
    int t0 = *xp;
    int t1 = *yp;
    *xp = t1;
    *yp = t0;
}
```

Register	Value
%edx	xp
%ecx	yp
%ebx	t0
%eax	t1

```
movl 8(%ebp), %edx    # edx = xp
movl 12(%ebp), %ecx   # ecx = yp
movl (%edx), %ebx     # ebx = *xp (t0)
movl (%ecx), %eax     # eax = *yp (t1)
movl %eax, (%edx)     # *xp = t1
movl %ebx, (%ecx)     # *yp = t0
```

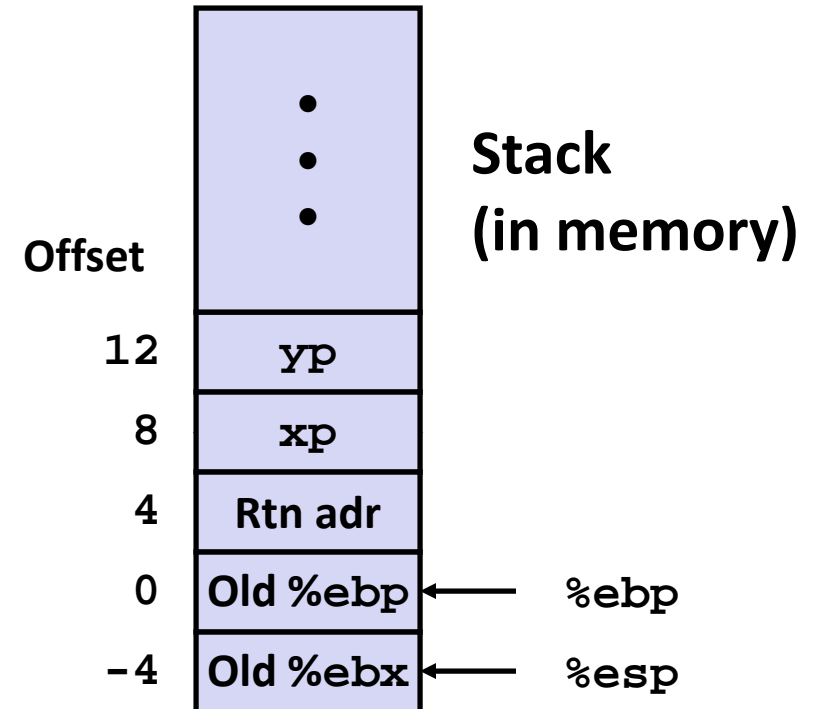

Understanding Swap

%eax	
%edx	
%ecx	
%ebx	
%esi	
%edi	
%esp	
%ebp	0x104

		Offset	Address
			123
			456
yp	12	0x120	0x110
xp	8	0x124	0x10c
	4	Rtn adr	0x108
%ebp	→ 0		0x104
	-4		0x100

```

movl 8(%ebp), %edx # edx = xp
movl 12(%ebp), %ecx # ecx = yp
movl (%edx), %ebx # ebx = *xp (t0)
movl (%ecx), %eax # eax = *yp (t1)
movl %eax, (%edx) # *xp = t1
movl %ebx, (%ecx) # *yp = t0

```

Understanding Swap

%eax	
%edx	0x124
%ecx	
%ebx	
%esi	
%edi	
%esp	
%ebp	0x104

		Address	
		123	0x124
		456	0x120
			0x11c
			0x118
			0x114
yp	12	0x120	0x110
xp	8	0x124	0x10c
	4	Rtn adr	0x108
%ebp	→ 0		0x104
	-4		0x100

```

movl 8(%ebp), %edx # edx = xp
movl 12(%ebp), %ecx # ecx = yp
movl (%edx), %ebx # ebx = *xp (t0)
movl (%ecx), %eax # eax = *yp (t1)
movl %eax, (%edx) # *xp = t1
movl %ebx, (%ecx) # *yp = t0

```

Understanding Swap

%eax	
%edx	0x124
%ecx	0x120
%ebx	
%esi	
%edi	
%esp	
%ebp	0x104

		Offset	Address
			123
			456
yp	12		0x120
xp	8		0x124
	4		Rtn adr
%ebp	→ 0		
	-4		

```

movl 8(%ebp), %edx    # edx = xp
movl 12(%ebp), %ecx  # ecx = yp
movl (%edx), %ebx    # ebx = *xp (t0)
movl (%ecx), %eax    # eax = *yp (t1)
movl %eax, (%edx)    # *xp = t1
movl %ebx, (%ecx)    # *yp = t0

```


Understanding Swap

%eax	456
%edx	0x124
%ecx	0x120
%ebx	123
%esi	
%edi	
%esp	
%ebp	0x104

		Address
		123 0x124
		456 0x120
		0x11c
		0x118
	Offset	0x114
yp	12	0x120 0x110
xp	8	0x124 0x10c
	4	Rtn adr 0x108
%ebp	→ 0	0x104
	-4	0x100

```

movl 8(%ebp), %edx # edx = xp
movl 12(%ebp), %ecx # ecx = yp
movl (%edx), %ebx # ebx = *xp (t0)
movl (%ecx), %eax # eax = *yp (t1)
movl %eax, (%edx) # *xp = t1
movl %ebx, (%ecx) # *yp = t0
  
```

Understanding Swap

%eax	456
%edx	0x124
%ecx	0x120
%ebx	123
%esi	
%edi	
%esp	
%ebp	0x104

		Address
		0x124
		0x120
		0x11c
		0x118
		0x114
yp	12	0x120
xp	8	0x124
	4	Rtn adr
%ebp	0	0x104
	-4	0x100

```

movl 8(%ebp), %edx # edx = xp
movl 12(%ebp), %ecx # ecx = yp
movl (%edx), %ebx # ebx = *xp (t0)
movl (%ecx), %eax # eax = *yp (t1)
movl %eax, (%edx) # *xp = t1
movl %ebx, (%ecx) # *yp = t0

```

Understanding Swap

%eax	456
%edx	0x124
%ecx	0x120
%ebx	123
%esi	
%edi	
%esp	
%ebp	0x104

		Offset	Address
			456
			123
yp	12	0x120	0x110
xp	8	0x124	0x10c
	4	Rtn adr	0x108
%ebp	→ 0		0x104
	-4		0x100

```

movl 8(%ebp), %edx # edx = xp
movl 12(%ebp), %ecx # ecx = yp
movl (%edx), %ebx # ebx = *xp (t0)
movl (%ecx), %eax # eax = *yp (t1)
movl %eax, (%edx) # *xp = t1
movl %ebx, (%ecx) # *yp = t0

```

Complete Memory Addressing Modes

■ Most General Form

$D(Rb, Ri, S)$ $Mem[Reg[Rb]+S*Reg[Ri]+ D]$

- D: Constant “displacement” 1, 2, or 4 bytes
- Rb: Base register: Any of 8 integer registers
- Ri: Index register: Any, except for `%esp`
 - Unlikely you’d use `%ebp`, either
- S: Scale: 1, 2, 4, or 8 (*why these numbers?*)

■ Special Cases

(Rb, Ri) $Mem[Reg[Rb]+Reg[Ri]]$

$D(Rb, Ri)$ $Mem[Reg[Rb]+Reg[Ri]+D]$

(Rb, Ri, S) $Mem[Reg[Rb]+S*Reg[Ri]]$

Today: Machine Programming I: Basics

- History of Intel processors and architectures
- C, assembly, machine code
- Assembly Basics: Registers, operands, move
- **Intro to x86-64**

Data Representations: IA32 + x86-64

■ Sizes of C Objects (in Bytes)

<i>C Data Type</i>	<i>Generic 32-bit</i>	<i>Intel IA32</i>	<i>x86-64</i>
▪ unsigned	4	4	4
▪ int	4	4	4
▪ long int	4	4	8
▪ char	1	1	1
▪ short	2	2	2
▪ float	4	4	4
▪ double	8	8	8
▪ long double	8	10/12	16
▪ char *	4	4	8

– *Or any other pointer*

x86-64 Integer Registers

<code>%rax</code>	<code>%eax</code>
<code>%rbx</code>	<code>%ebx</code>
<code>%rcx</code>	<code>%ecx</code>
<code>%rdx</code>	<code>%edx</code>
<code>%rsi</code>	<code>%esi</code>
<code>%rdi</code>	<code>%edi</code>
<code>%rsp</code>	<code>%esp</code>
<code>%rbp</code>	<code>%ebp</code>

<code>%r8</code>	<code>%r8d</code>
<code>%r9</code>	<code>%r9d</code>
<code>%r10</code>	<code>%r10d</code>
<code>%r11</code>	<code>%r11d</code>
<code>%r12</code>	<code>%r12d</code>
<code>%r13</code>	<code>%r13d</code>
<code>%r14</code>	<code>%r14d</code>
<code>%r15</code>	<code>%r15d</code>

- Extend existing registers. Add 8 new ones.
- Make `%ebp/%rbp` general purpose

Instructions

- Long word l (4 Bytes) \leftrightarrow Quad word q (8 Bytes)
- New instructions:
 - `movl` \rightarrow `movq`
 - `addl` \rightarrow `addq`
 - `sall` \rightarrow `salq`
 - etc.
- **32-bit instructions that generate 32-bit results**
 - Set higher order bits of destination register to 0
 - Example: `addl`

32-bit code for swap

```
void swap(int *xp, int *yp)
{
    int t0 = *xp;
    int t1 = *yp;
    *xp = t1;
    *yp = t0;
}
```

swap:

```

pushl %ebp
movl  %esp,%ebp
pushl %ebx
} Set Up

movl  8(%ebp), %edx
movl  12(%ebp), %ecx
movl  (%edx), %ebx
movl  (%ecx), %eax
movl  %eax, (%edx)
movl  %ebx, (%ecx)
} Body

popl  %ebx
popl  %ebp
ret
} Finish
```

64-bit code for swap

```
void swap(int *xp, int *yp)
{
    int t0 = *xp;
    int t1 = *yp;
    *xp = t1;
    *yp = t0;
}
```

swap:

```
movl    (%rdi), %edx
movl    (%rsi), %eax
movl    %eax, (%rdi)
movl    %edx, (%rsi)
```

ret

} Set
Up

} Body

} Finish

- **Operands passed in registers (why useful?)**
 - First (**xp**) in **%rdi**, second (**yp**) in **%rsi**
 - 64-bit pointers
- **No stack operations required**
- **32-bit data**
 - Data held in registers **%eax** and **%edx**
 - **movl** operation

64-bit code for long int swap

swap_1:

```
void swap(long *xp, long *yp)
{
    long t0 = *xp;
    long t1 = *yp;
    *xp = t1;
    *yp = t0;
}
```

```
movq    (%rdi), %rdx
movq    (%rsi), %rax
movq    %rax, (%rdi)
movq    %rdx, (%rsi)
```

```
ret
```

} Set Up

} Body

} Finish

■ 64-bit data

- Data held in registers `%rax` and `%rdx`
- `movq` operation
 - “q” stands for quad-word

Machine Programming I: Summary

- **History of Intel processors and architectures**
 - Evolutionary design leads to many quirks and artifacts
- **C, assembly, machine code**
 - Compiler must transform statements, expressions, procedures into low-level instruction sequences
- **Assembly Basics: Registers, operands, move**
 - The x86 move instructions cover wide range of data movement forms
- **Intro to x86-64**
 - A major departure from the style of code seen in IA32