

10-301/601: Introduction to Machine Learning

Lecture 12 – Neural Networks

Henry Chai


6/15/22

Front Matter



- Announcements
 - HW4 released 6/15 (today!), due 6/22 at 1 PM
 - No OH on Monday (Juneteenth)
- Recommended Readings
 - Mitchell, Chapters 4.1 – 4.6

Biological Neural Network



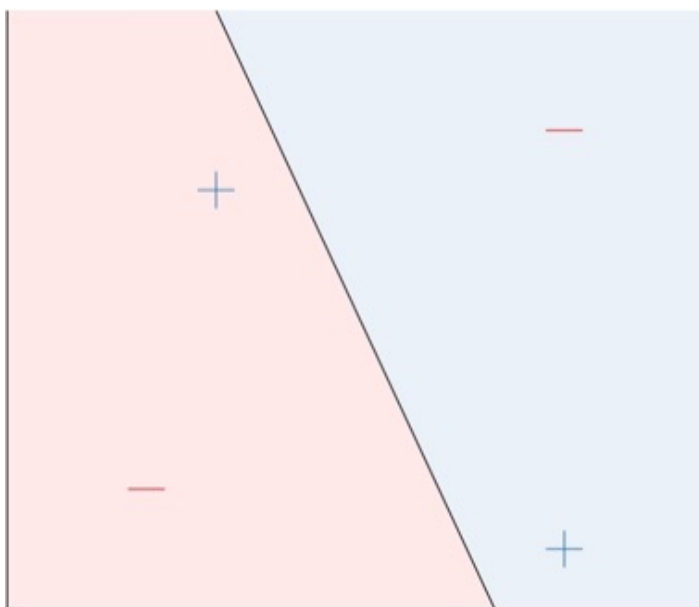


h_1

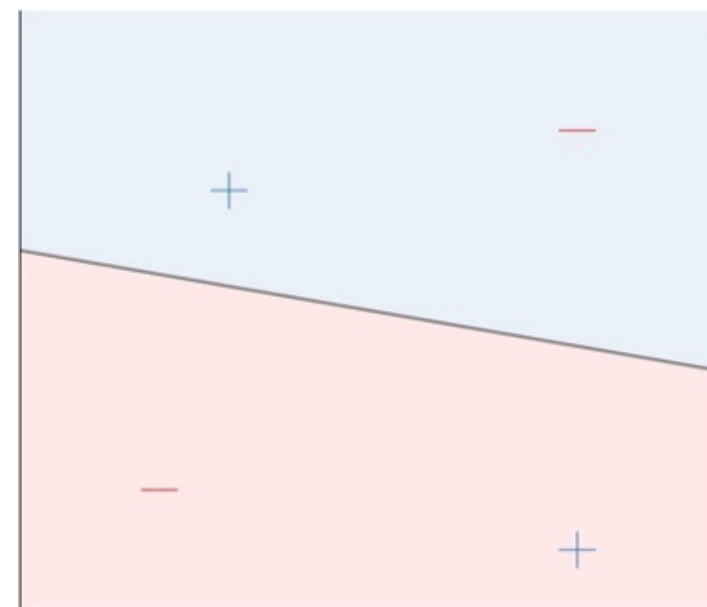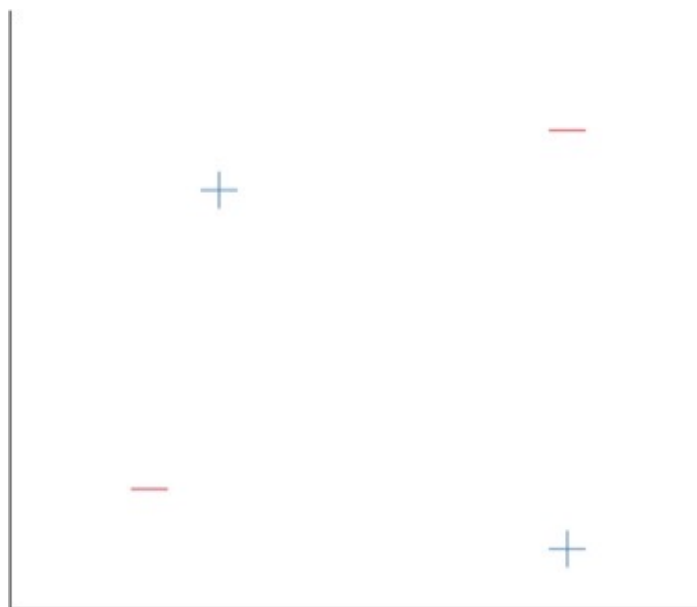


h_2

Perceptrons


- Linear model for classification
- $h(\mathbf{x}) = \text{sign}(\mathbf{w}^T \mathbf{x})$
- Predictions are $+1$ or -1

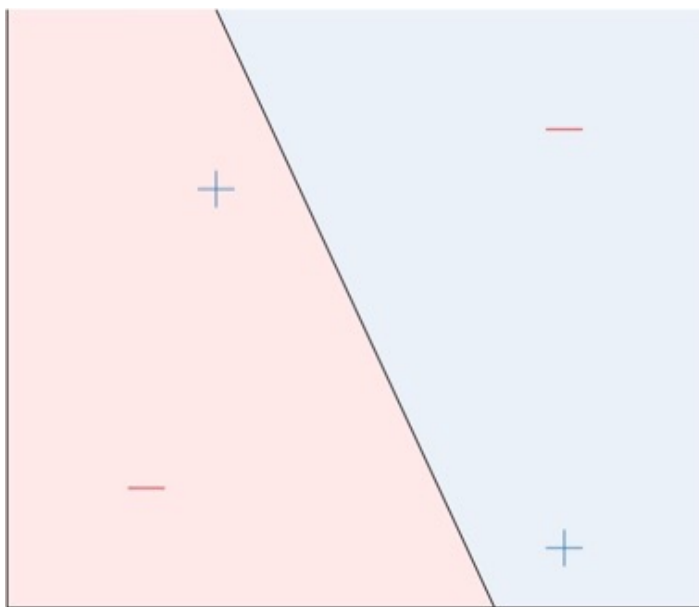

h_1

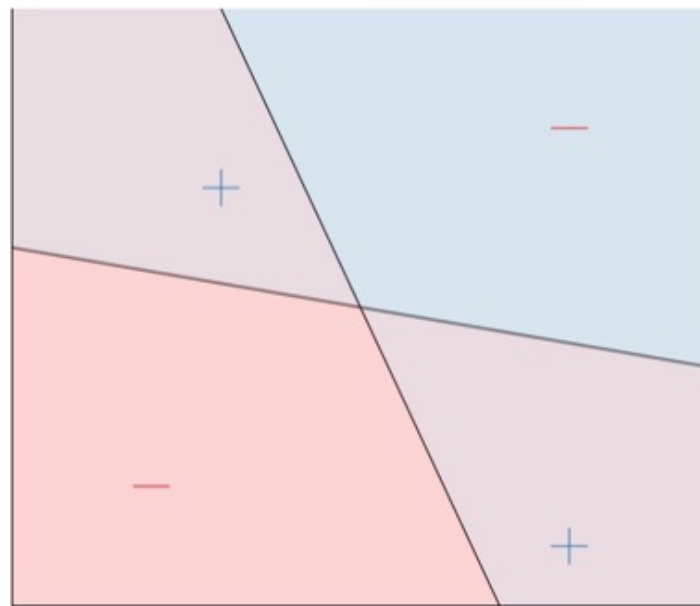


h_1

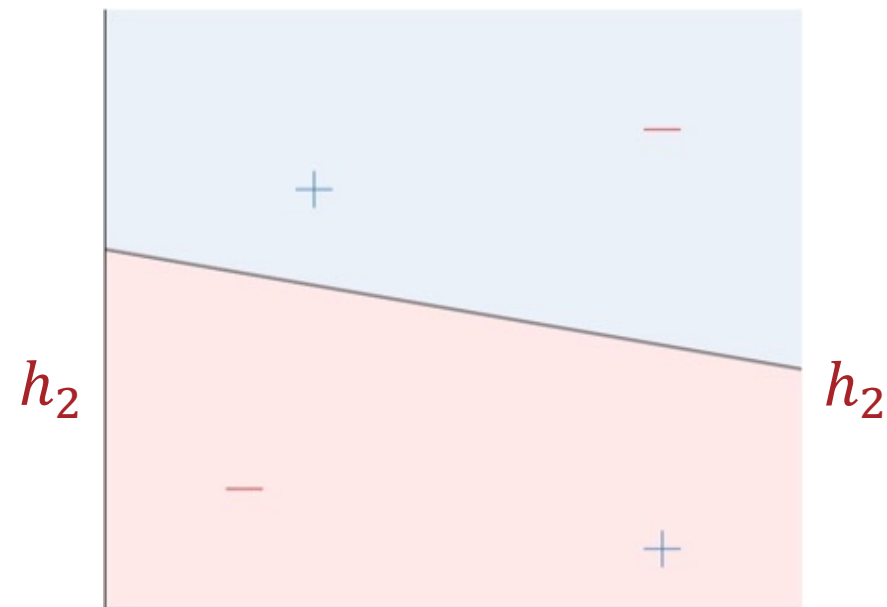


h_2

h_2


Combining Perceptrons

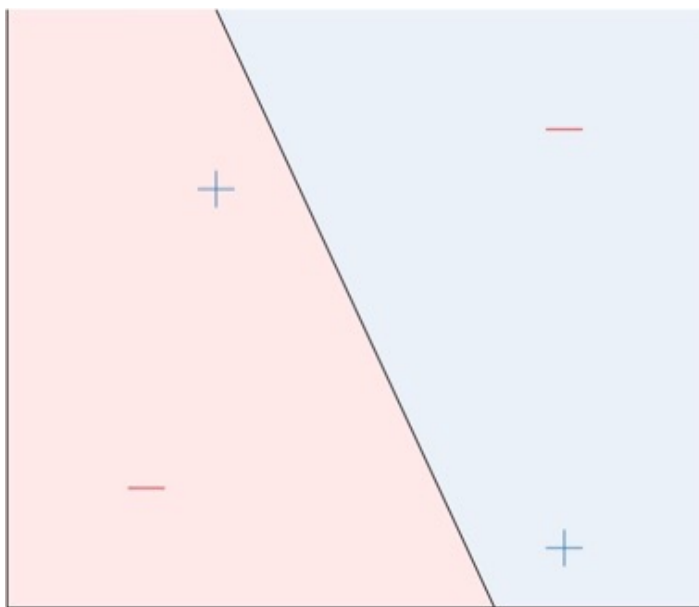

h_1

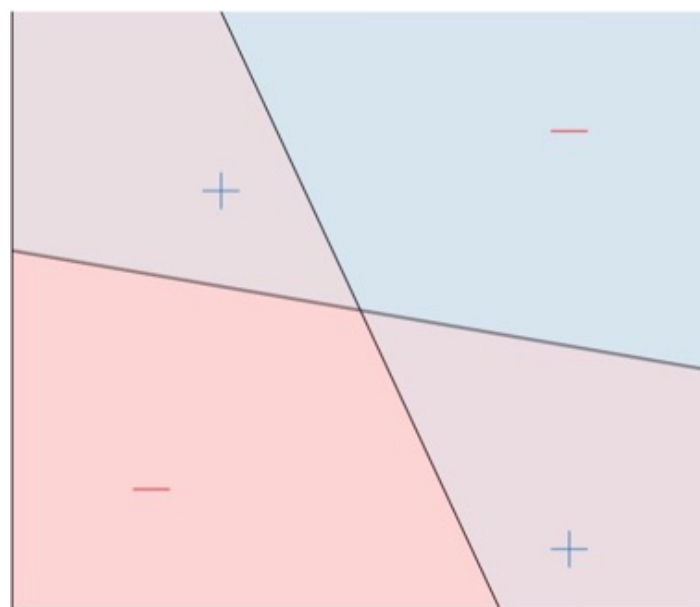


h_1

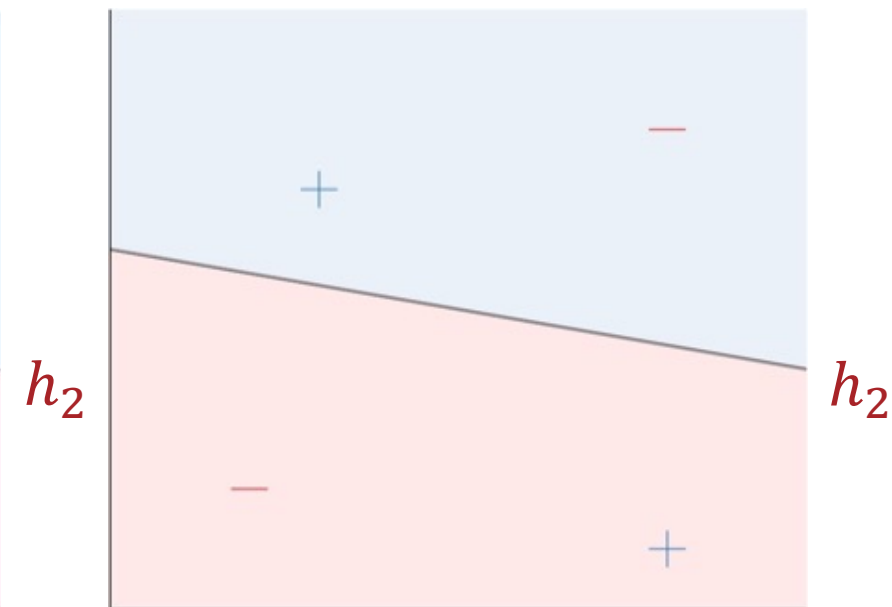


h_2

$$h(\mathbf{x}) = \begin{cases} +1 & \text{if } (h_1(\mathbf{x}) = +1 \text{ and } h_2(\mathbf{x}) = -1) \text{ or } (h_1(\mathbf{x}) = -1 \text{ and } h_2(\mathbf{x}) = +1) \\ -1 & \text{otherwise} \end{cases}$$

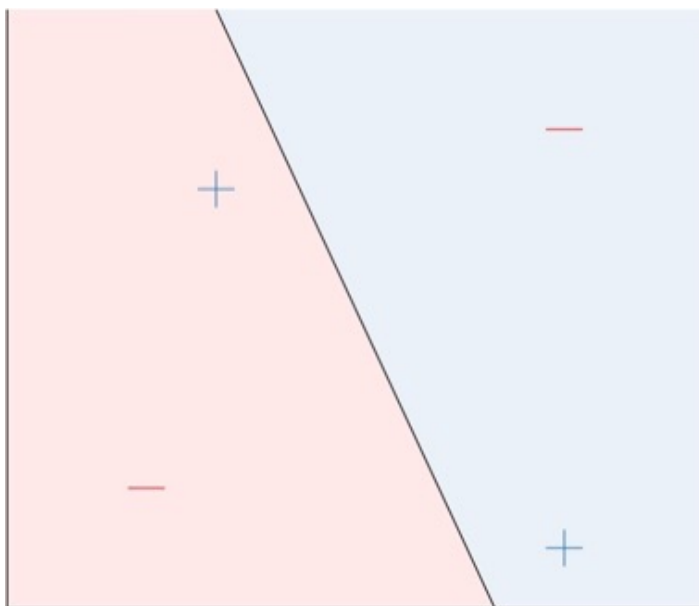


h_1

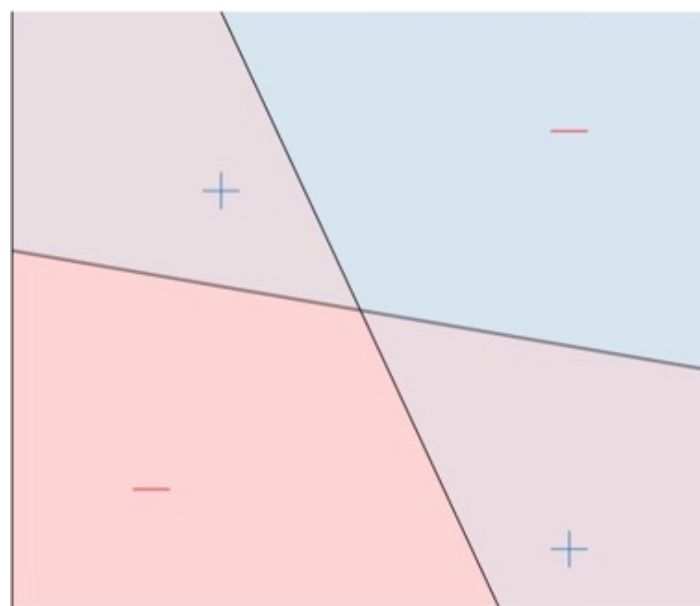

h_1

h_2

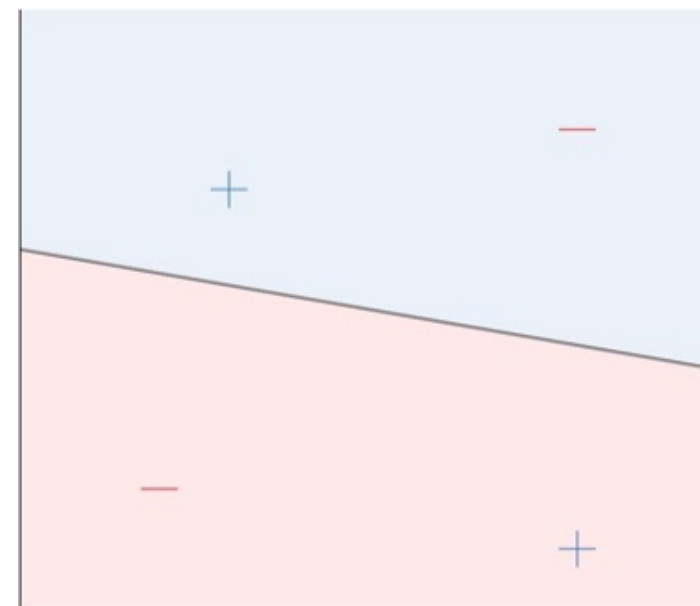

h_2

$$h(x) = OR \left(AND(h_1(x), \neg h_2(x)), AND(\neg h_1(x), h_2(x)) \right)$$

Boolean Algebra

- Boolean variables are either $+1$ ("true") or -1 ("false")
- Basic Boolean operations
 - Negation: $\neg z = -1 * z$
 - And: $AND(z_1, z_2) = \begin{cases} +1 & \text{if both } z_1 \text{ and } z_2 \text{ equal } +1 \\ -1 & \text{otherwise} \end{cases}$
 - Or: $OR(z_1, z_2) = \begin{cases} +1 & \text{if either } z_1 \text{ or } z_2 \text{ equals } +1 \\ -1 & \text{otherwise} \end{cases}$

Boolean Algebra

- Boolean variables are either $+1$ ("true") or -1 ("false")
- Basic Boolean operations
 - Negation: $\neg z = -1 * z$
 - And: $AND(z_1, z_2) = \text{sign}(z_1 + z_2 - 1.5)$
 - Or: $OR(z_1, z_2) = \text{sign}(z_1 + z_2 + 1.5)$

Boolean Algebra


- Boolean variables are either $+1$ ("true") or -1 ("false")
- Basic Boolean operations
 - Negation: $\neg z = -1 * z$
 - And: $AND(z_1, z_2) = \text{sign} \left([-1.5, 1, 1] \begin{bmatrix} 1 \\ z_1 \\ z_2 \end{bmatrix} \right)$
 - Or: $OR(z_1, z_2) = \text{sign} \left([1.5, 1, 1] \begin{bmatrix} 1 \\ z_1 \\ z_2 \end{bmatrix} \right)$

Building a Network

$$h(\mathbf{x}) = OR \left(AND(h_1(\mathbf{x}), \neg h_2(\mathbf{x})), AND(\neg h_1(\mathbf{x}), h_2(\mathbf{x})) \right)$$


Building a Network

$$h(\mathbf{x}) = \text{OR} \left(\text{AND}(h_1(\mathbf{x}), \neg h_2(\mathbf{x})), \text{AND}(\neg h_1(\mathbf{x}), h_2(\mathbf{x})) \right)$$

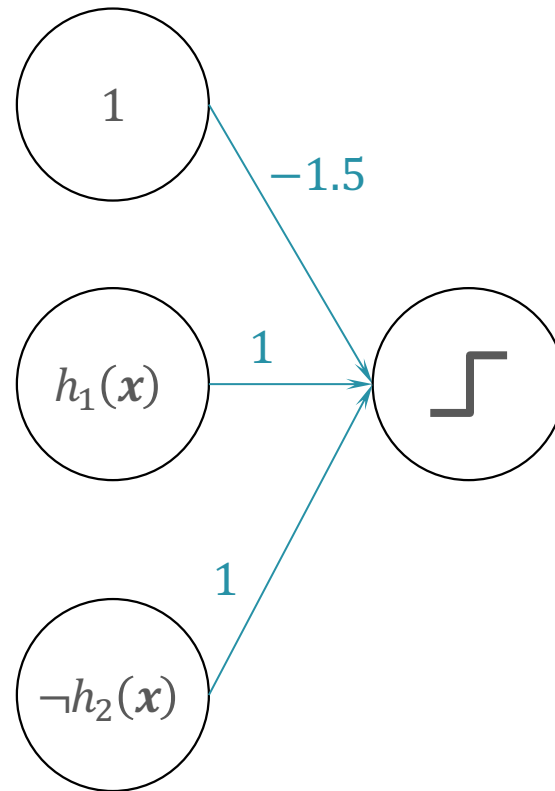


Building a Network

$$h(\mathbf{x}) = \text{OR} \left(\text{AND}(h_1(\mathbf{x}), \neg h_2(\mathbf{x})), \text{AND}(\neg h_1(\mathbf{x}), h_2(\mathbf{x})) \right)$$

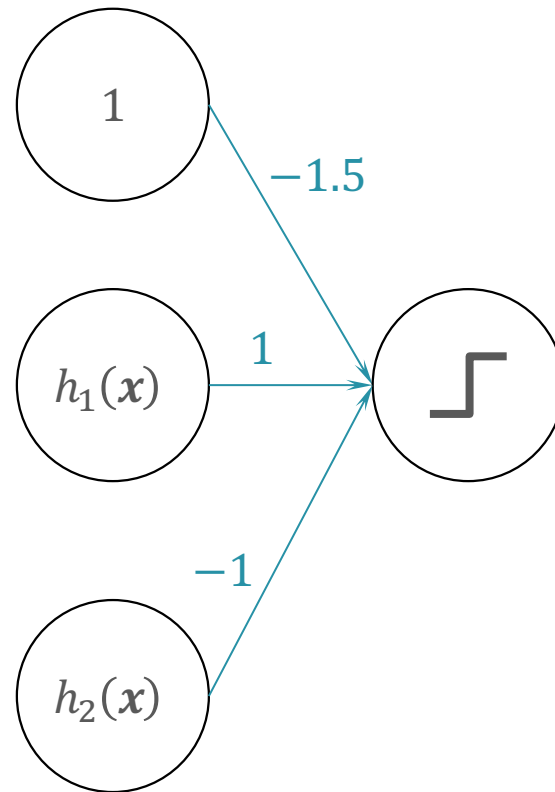


Building a Network

$$h(x) = OR \left(AND(h_1(x), \neg h_2(x)), AND(\neg h_1(x), h_2(x)) \right)$$

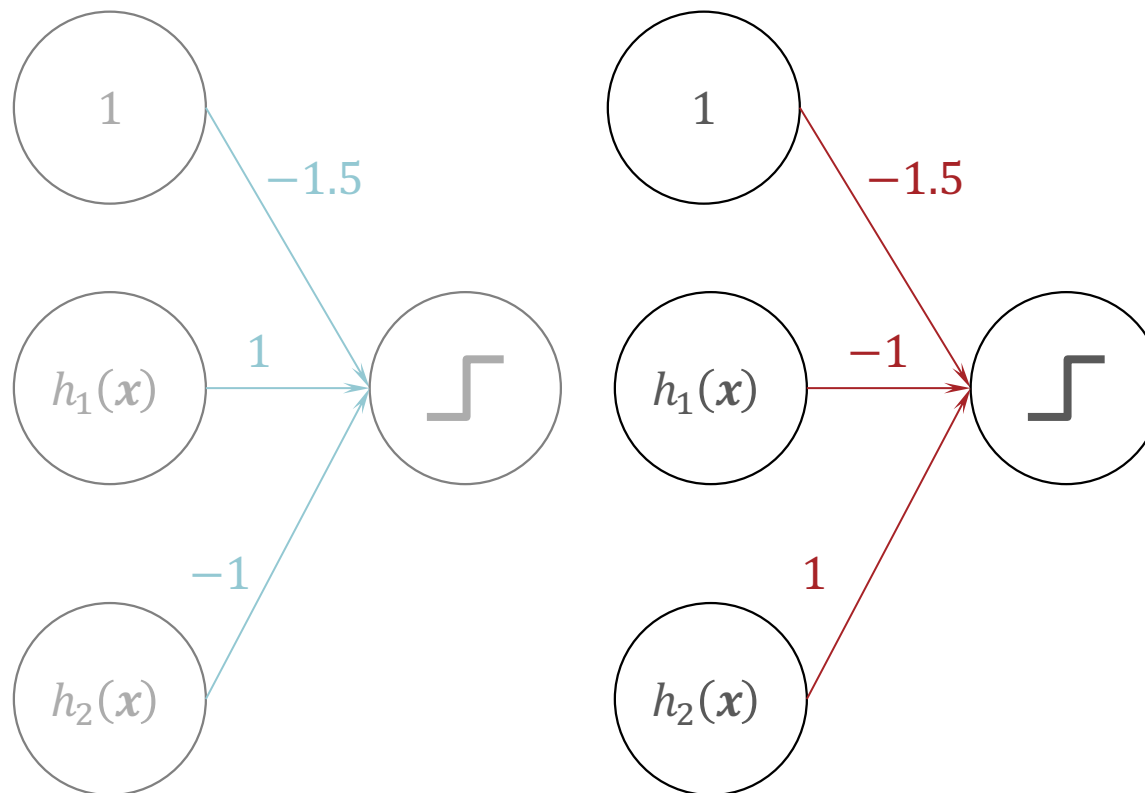


Building a Network

$$h(x) = OR \left(AND(h_1(x), \neg h_2(x)), AND(\neg h_1(x), h_2(x)) \right)$$

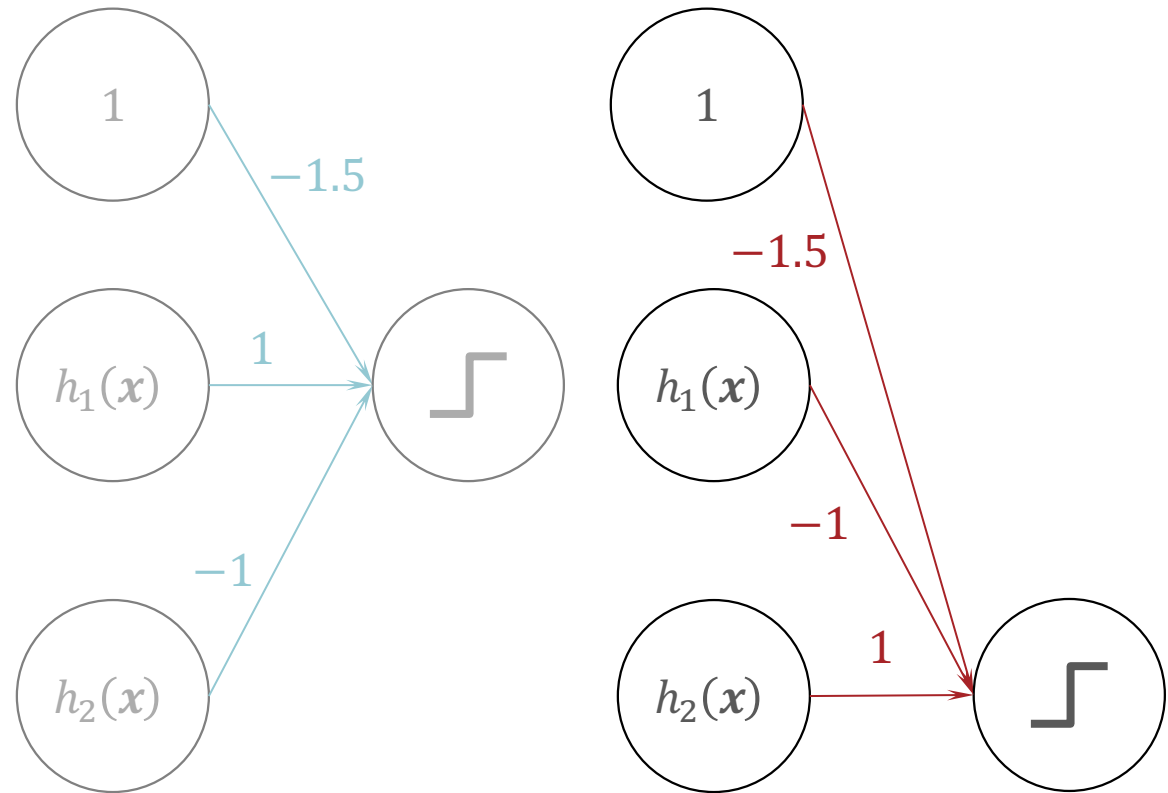


Building a Network

$$h(\mathbf{x}) = \text{OR} \left(\text{AND}(h_1(\mathbf{x}), \neg h_2(\mathbf{x})), \text{AND}(\neg h_1(\mathbf{x}), h_2(\mathbf{x})) \right)$$

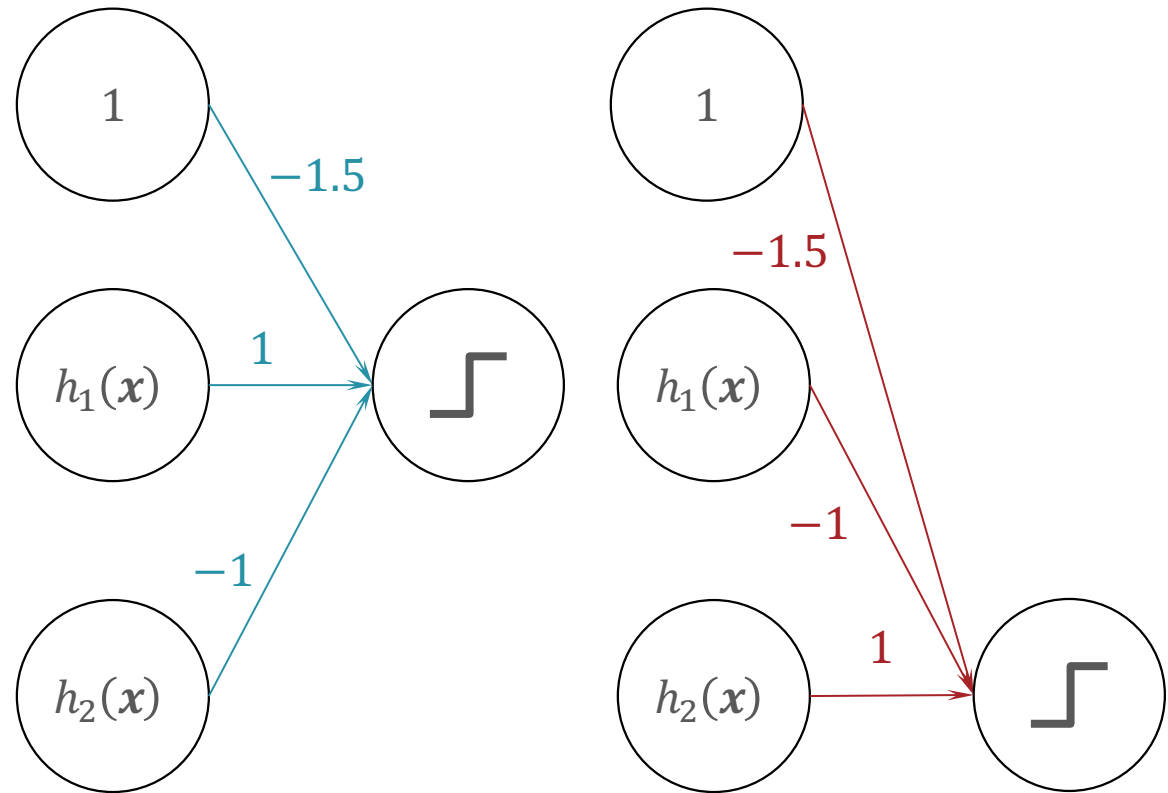

Building a Network


$$h(\mathbf{x}) = OR \left(AND(h_1(\mathbf{x}), \neg h_2(\mathbf{x})), AND(\neg h_1(\mathbf{x}), h_2(\mathbf{x})) \right)$$

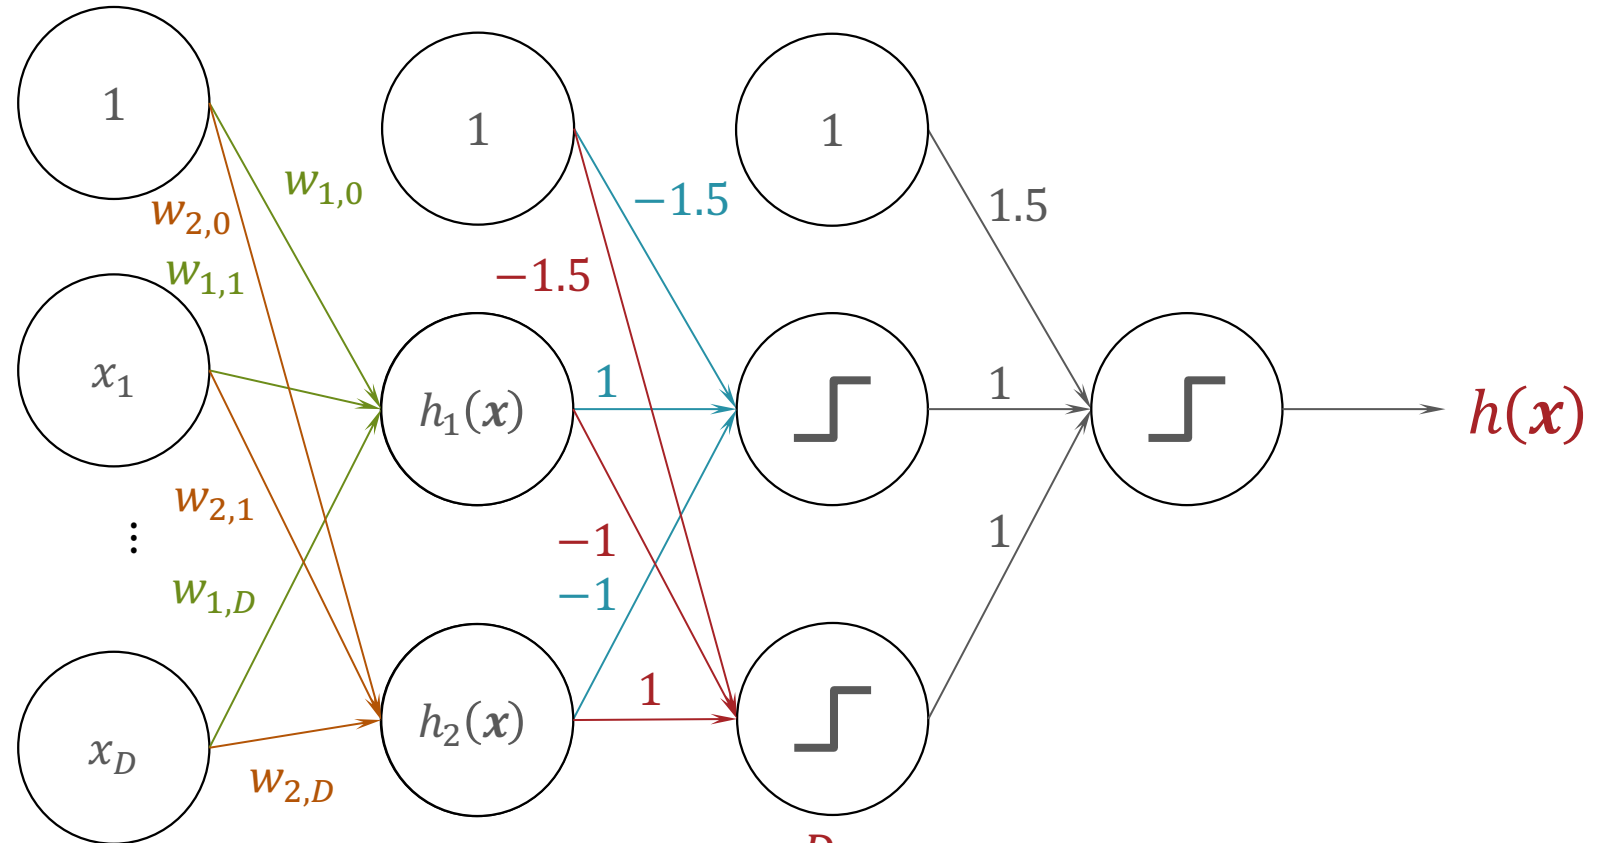

$$h_i(\mathbf{x}) = \text{sign}(\mathbf{w}_i^T \mathbf{x}) = \text{sign} \left(\sum_{d=0}^D w_{i,d} x_d \right)$$

Building a Network


$$h(\mathbf{x}) = OR \left(AND(h_1(\mathbf{x}), \neg h_2(\mathbf{x})), AND(\neg h_1(\mathbf{x}), h_2(\mathbf{x})) \right)$$

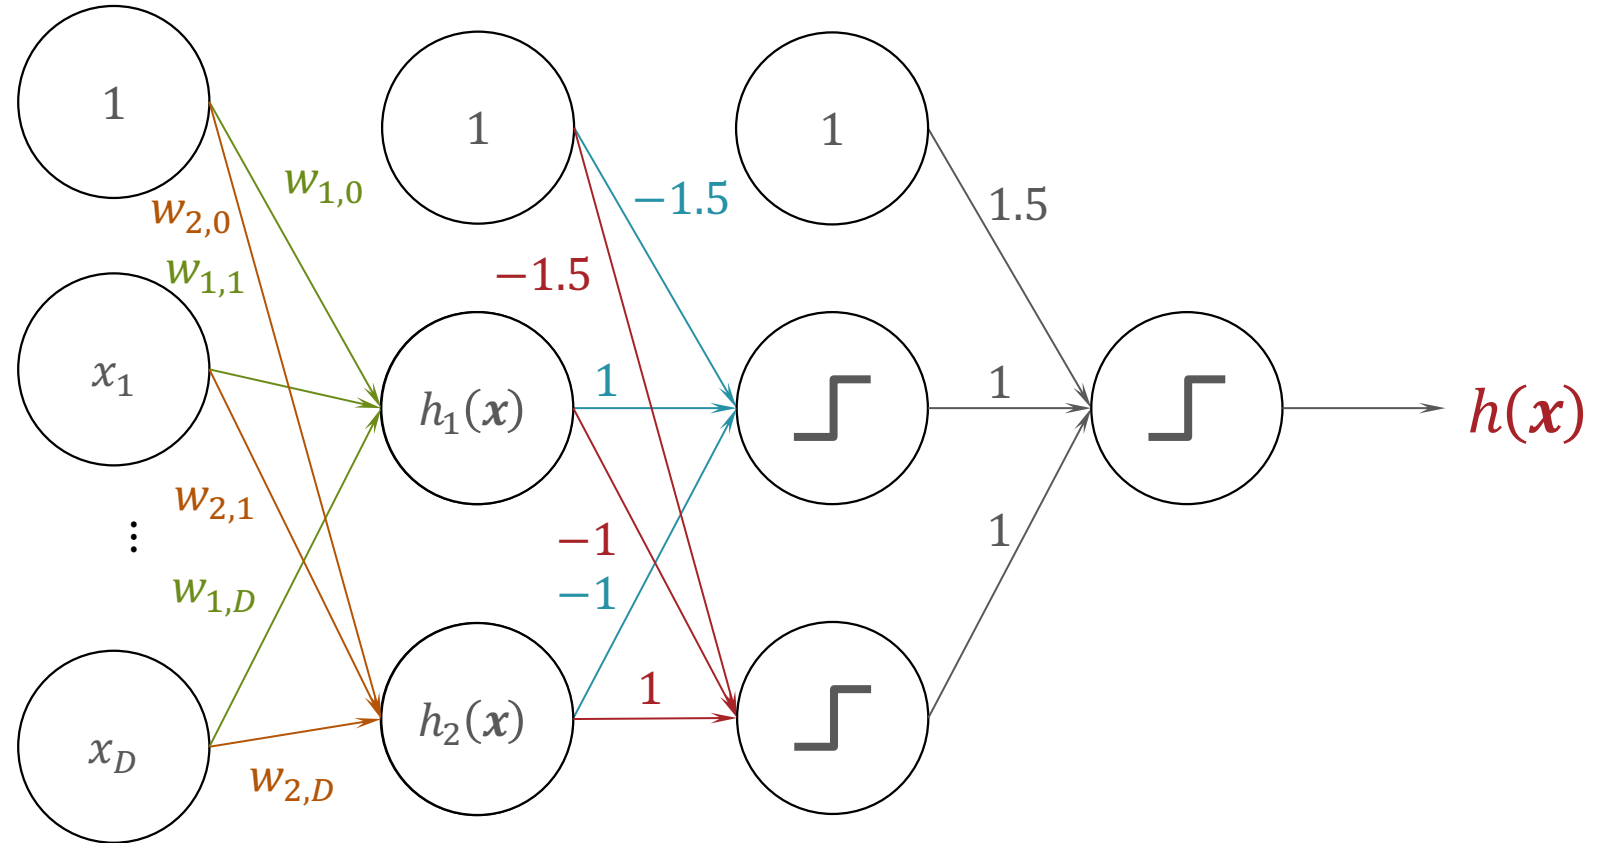

$$h(\mathbf{x}) = \text{sign}(\text{sign}(\text{sign}(\mathbf{w}_1^T \mathbf{x}) - \text{sign}(\mathbf{w}_2^T \mathbf{x}) - 1.5) + \text{sign}(-\text{sign}(\mathbf{w}_1^T \mathbf{x}) + \text{sign}(\mathbf{w}_2^T \mathbf{x}) - 1.5) + 1.5)$$

Building a Network


$$h(\mathbf{x}) = OR \left(AND(h_1(\mathbf{x}), \neg h_2(\mathbf{x})), AND(\neg h_1(\mathbf{x}), h_2(\mathbf{x})) \right)$$

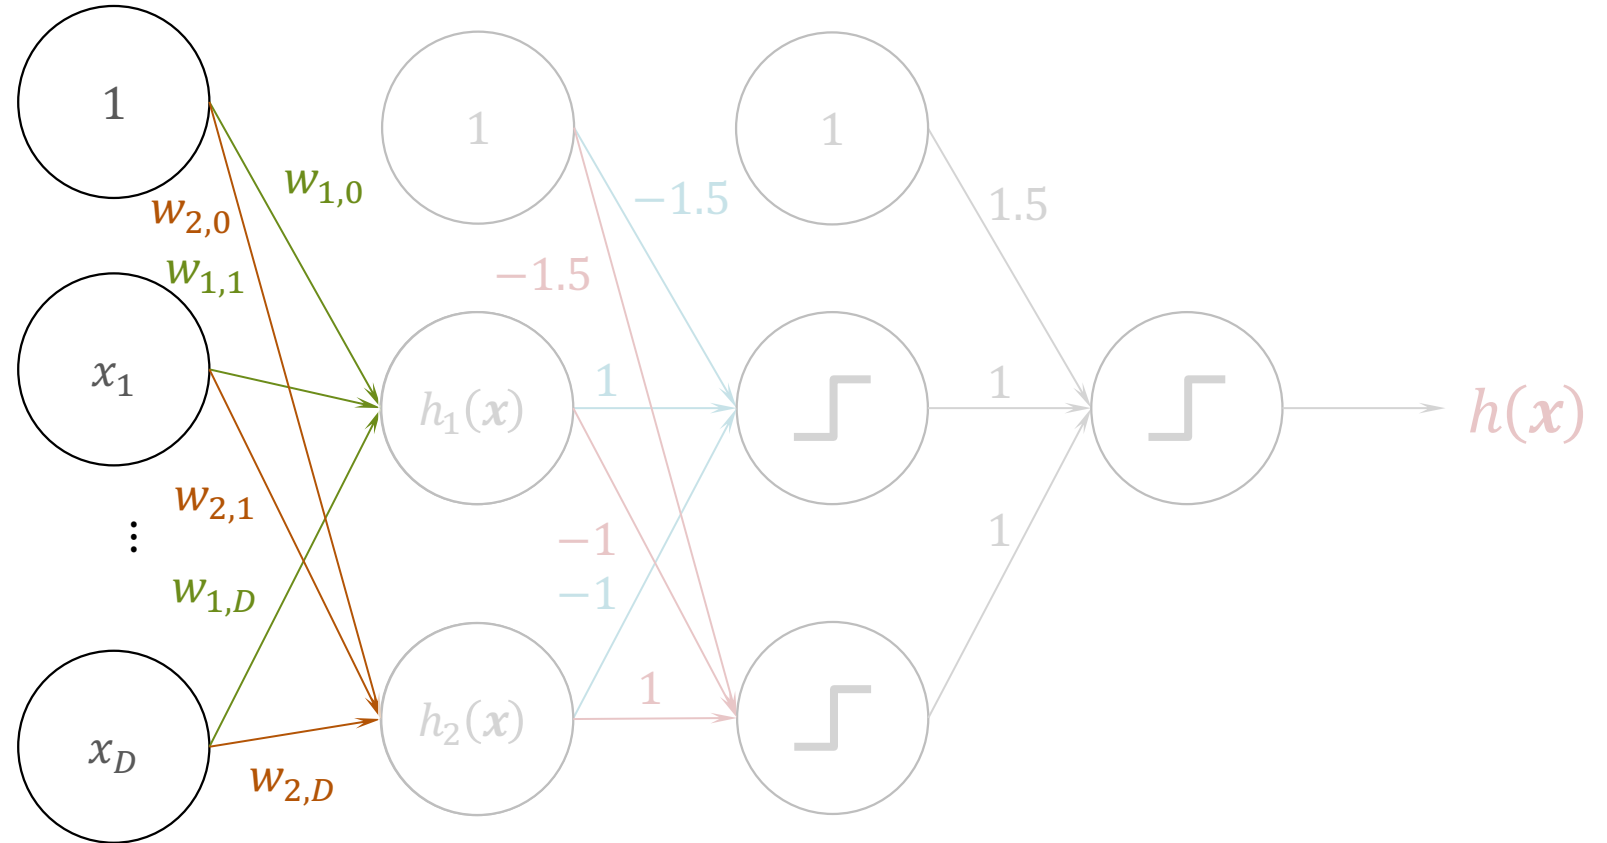

$$h(\mathbf{x}) = \text{sign}(\text{sign}(\text{sign}(\mathbf{w}_1^T \mathbf{x}) - \text{sign}(\mathbf{w}_2^T \mathbf{x}) - 1.5) + \text{sign}(-\text{sign}(\mathbf{w}_1^T \mathbf{x}) + \text{sign}(\mathbf{w}_2^T \mathbf{x}) - 1.5) + 1.5)$$

Building a Network


$$h(\mathbf{x}) = OR \left(AND(h_1(\mathbf{x}), \neg h_2(\mathbf{x})), AND(\neg h_1(\mathbf{x}), h_2(\mathbf{x})) \right)$$

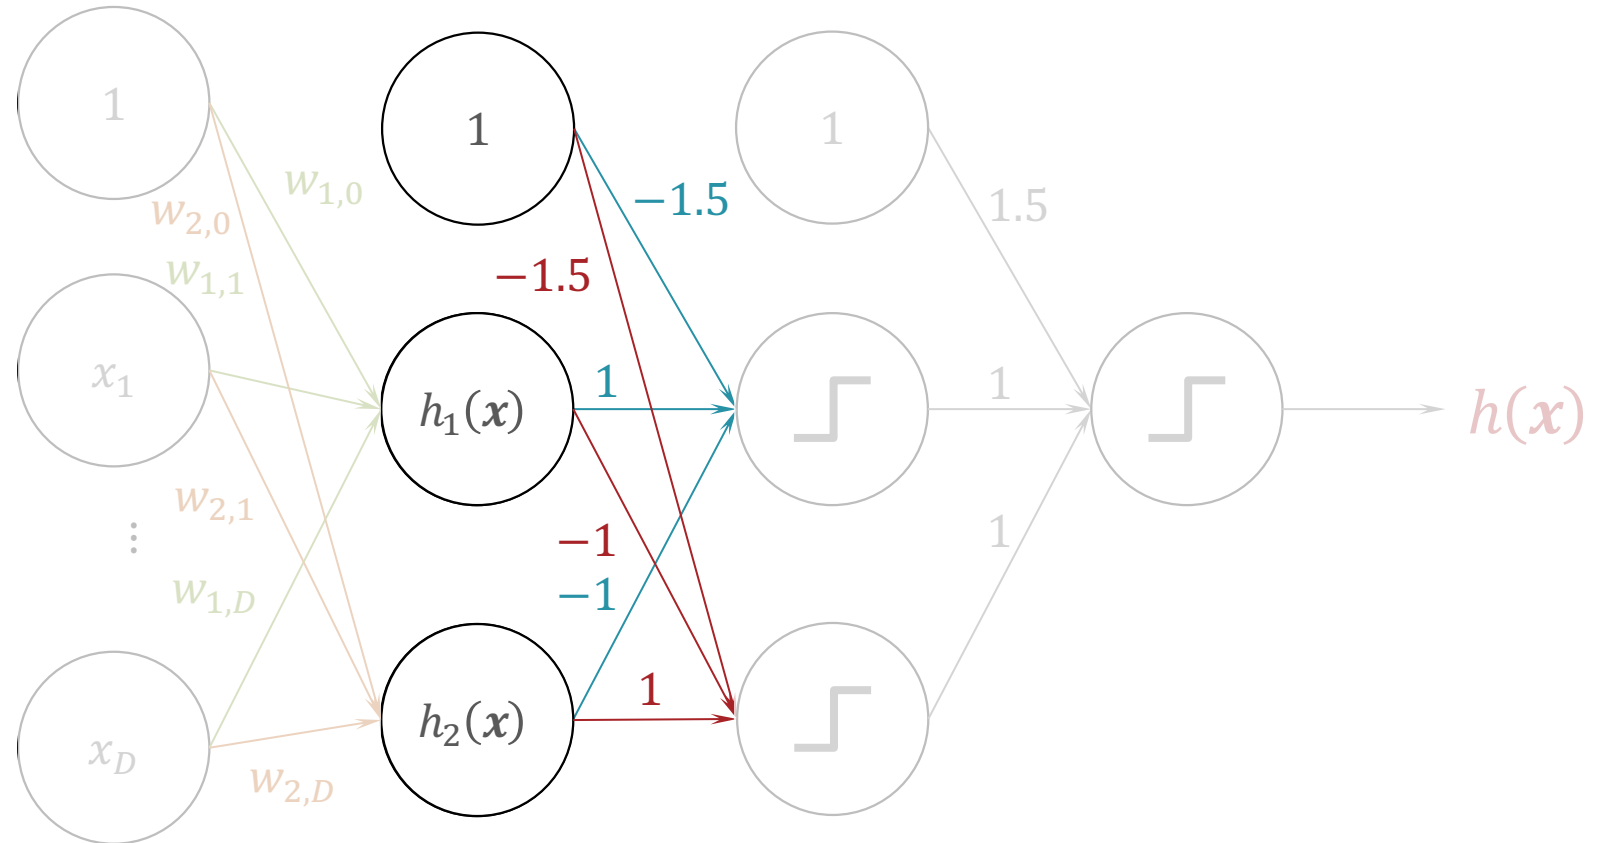

$$h(\mathbf{x}) = \text{sign}(\text{sign}(\text{sign}(\mathbf{w}_1^T \mathbf{x}) - \text{sign}(\mathbf{w}_2^T \mathbf{x}) - 1.5) + \text{sign}(-\text{sign}(\mathbf{w}_1^T \mathbf{x}) + \text{sign}(\mathbf{w}_2^T \mathbf{x}) - 1.5) + 1.5)$$

Building a Network


$$h(\mathbf{x}) = OR \left(AND(h_1(\mathbf{x}), \neg h_2(\mathbf{x})), AND(\neg h_1(\mathbf{x}), h_2(\mathbf{x})) \right)$$

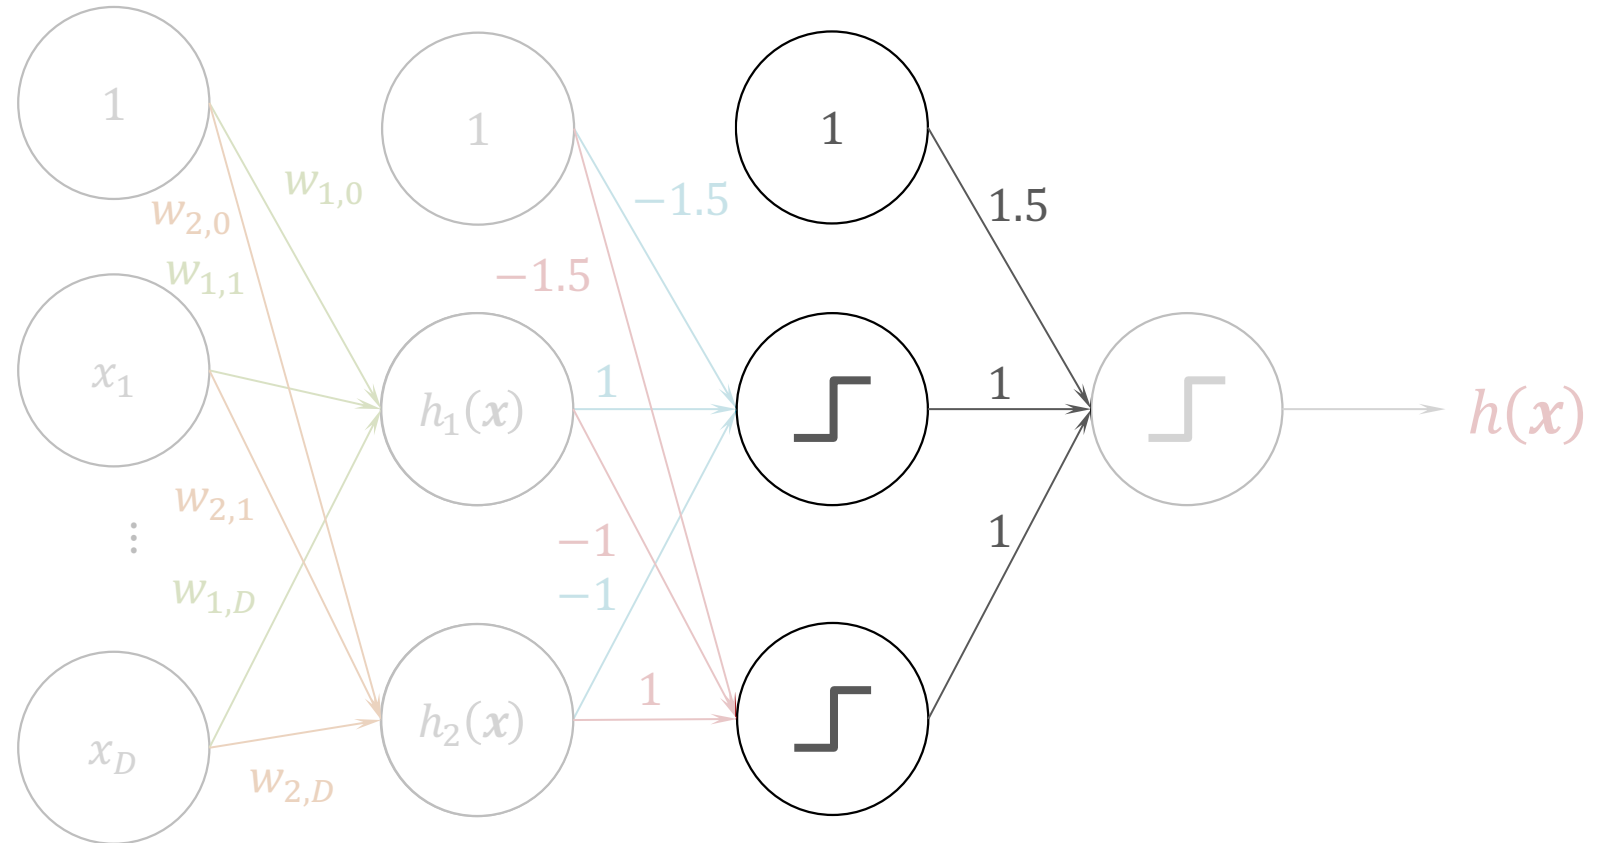

$$h(\mathbf{x}) = \text{sign}(\text{sign}(\text{sign}(\mathbf{w}_1^T \mathbf{x}) - \text{sign}(\mathbf{w}_2^T \mathbf{x}) - 1.5) + \text{sign}(-\text{sign}(\mathbf{w}_1^T \mathbf{x}) + \text{sign}(\mathbf{w}_2^T \mathbf{x}) - 1.5) + 1.5)$$


Building a Network

$$h(\mathbf{x}) = OR \left(AND(h_1(\mathbf{x}), \neg h_2(\mathbf{x})), AND(\neg h_1(\mathbf{x}), h_2(\mathbf{x})) \right)$$

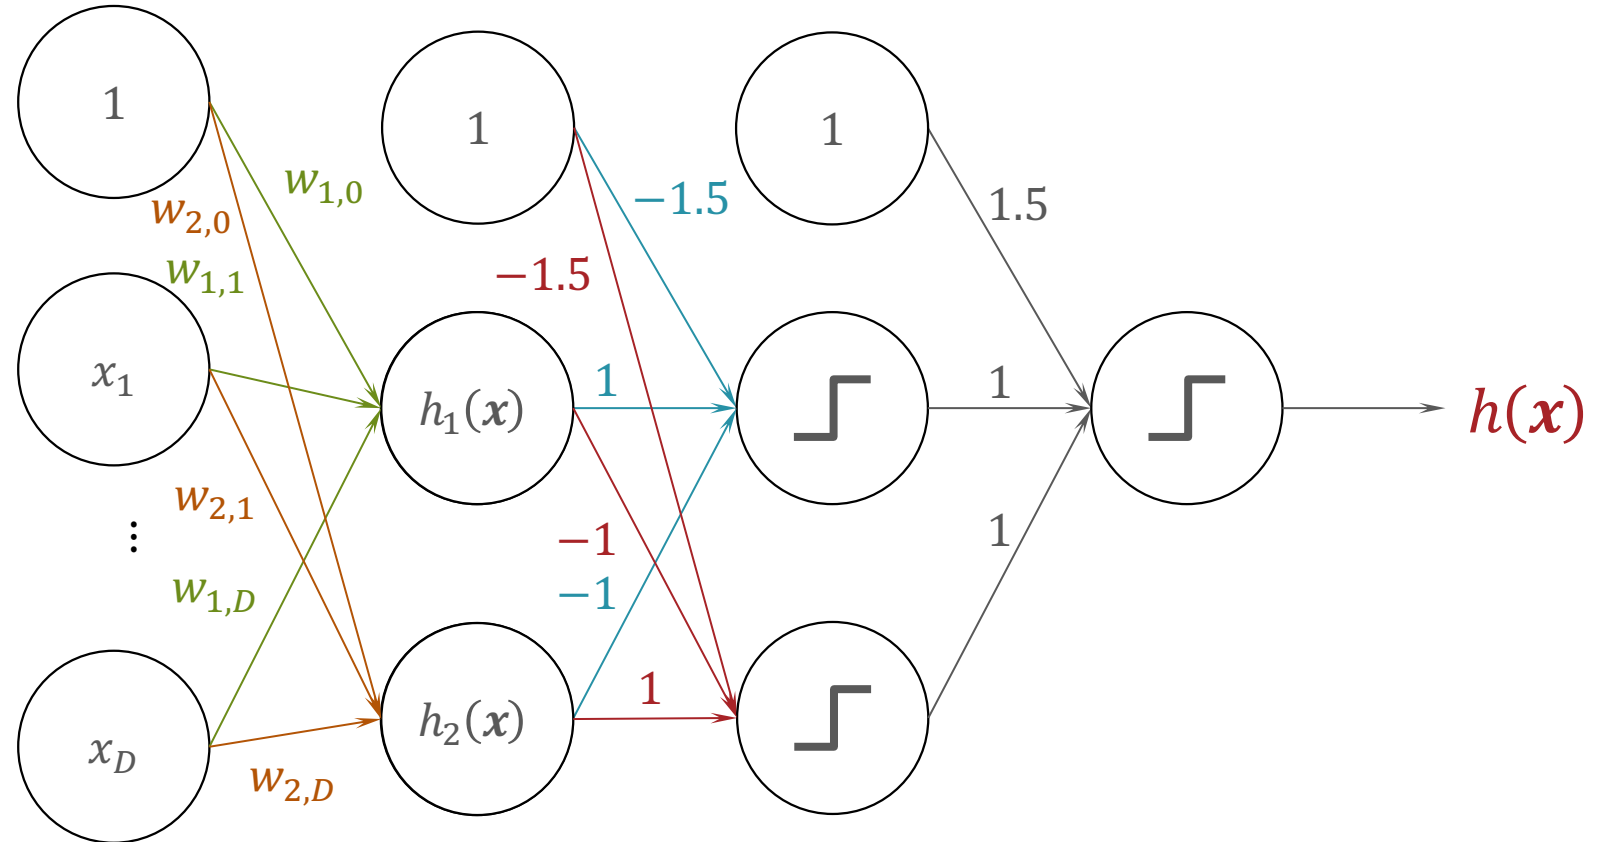


$$h(\mathbf{x}) = \text{sign}(\text{sign}(\text{sign}(\mathbf{w}_1^T \mathbf{x}) - \text{sign}(\mathbf{w}_2^T \mathbf{x}) - 1.5) + \text{sign}(-\text{sign}(\mathbf{w}_1^T \mathbf{x}) + \text{sign}(\mathbf{w}_2^T \mathbf{x}) - 1.5) + 1.5)$$

Multi-Layer Perceptron (MLP)

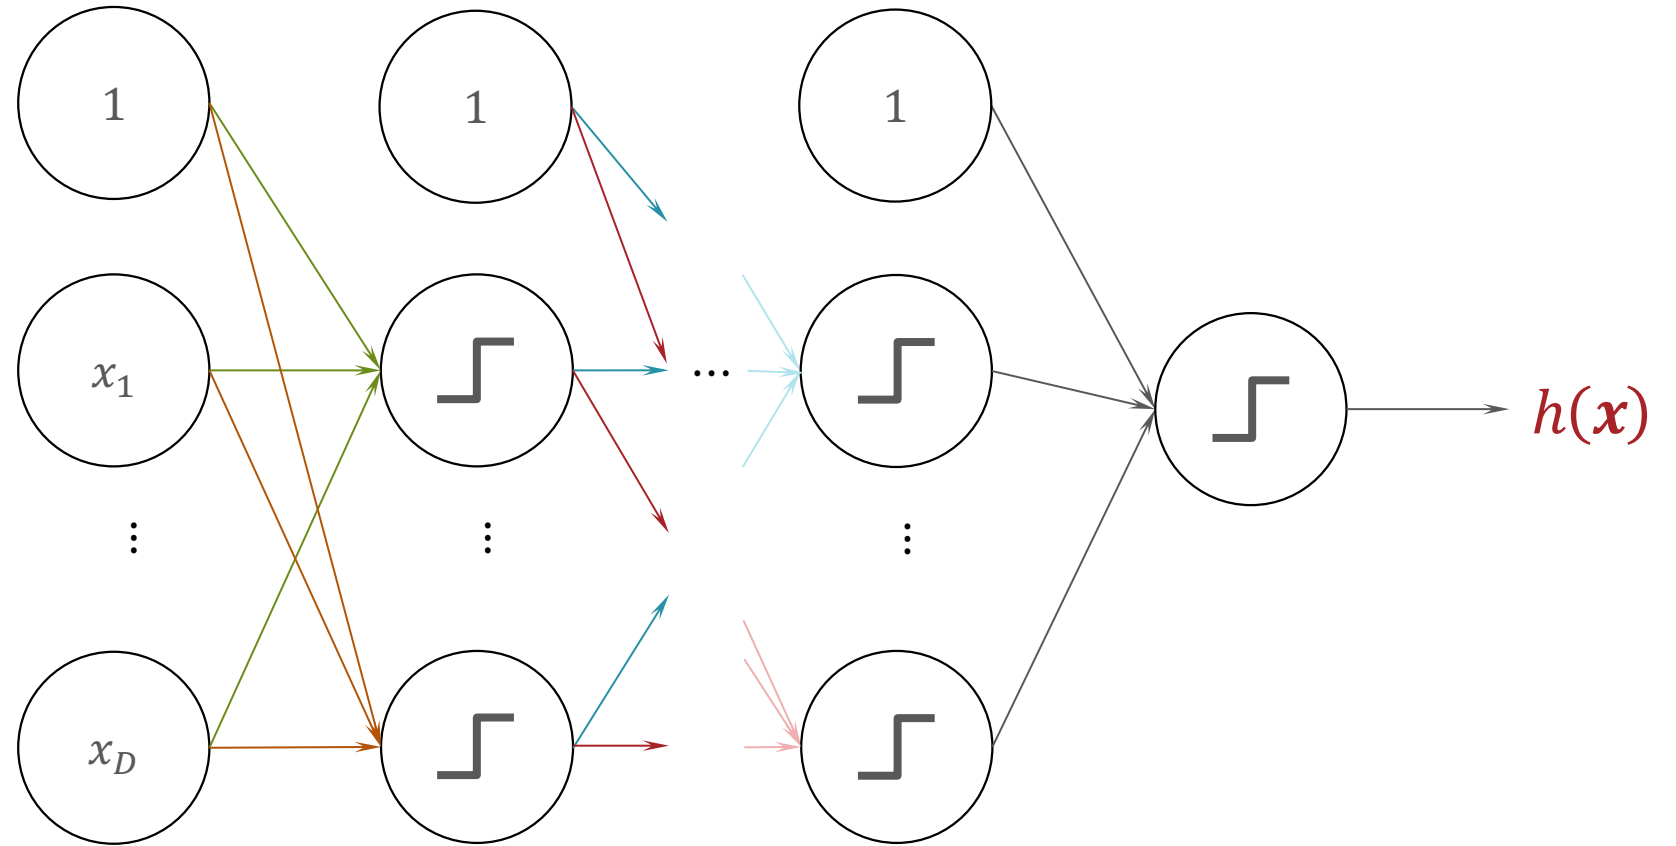

(Fully-Connected) Feed Forward Neural Network

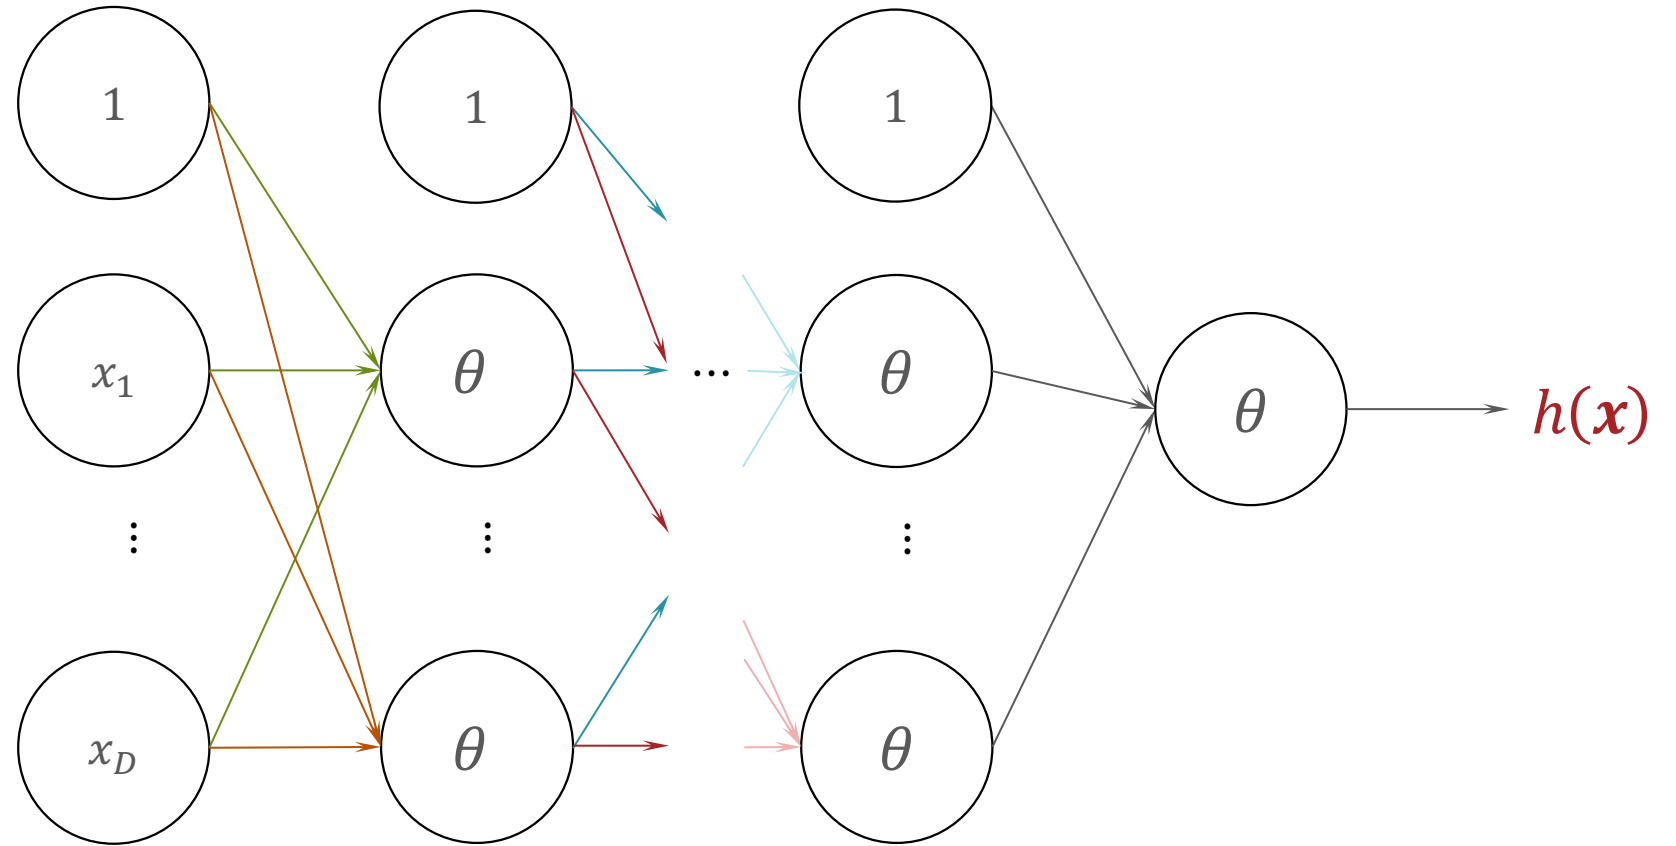


$\theta(\cdot)$





- Hyperbolic tangent:

$$\tanh(z) = \frac{\sinh(z)}{\cosh(z)} = \frac{e^z - e^{-z}}{e^z + e^{-z}}$$


- $\frac{\partial \tanh(z)}{\partial z} = 1 - \tanh(z)^2$

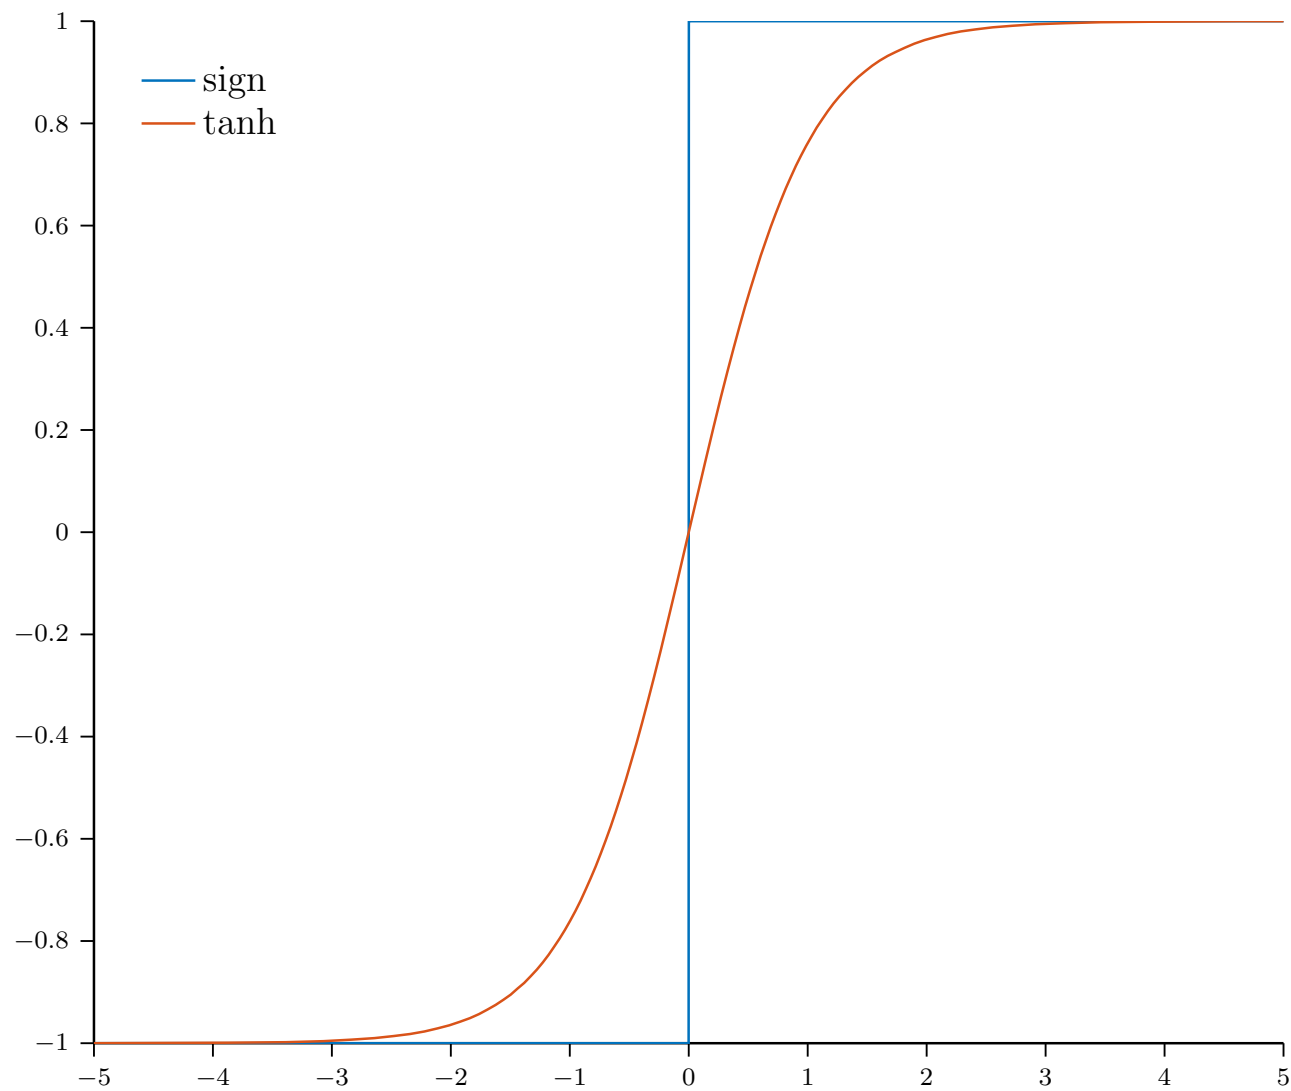

Other Activation Functions

Logistic, sigmoid, or soft step		$\sigma(x) = \frac{1}{1 + e^{-x}}$
Hyperbolic tangent (tanh)		$\tanh(x) = \frac{e^x - e^{-x}}{e^x + e^{-x}}$
Rectified linear unit (ReLU) ^[7]		$\begin{cases} 0 & \text{if } x \leq 0 \\ x & \text{if } x > 0 \end{cases}$ $= \max\{0, x\} = x \mathbf{1}_{x>0}$
Gaussian Error Linear Unit (GELU) ^[4]		$\frac{1}{2}x \left(1 + \operatorname{erf}\left(\frac{x}{\sqrt{2}}\right) \right)$ $= x\Phi(x)$
Softplus ^[8]		$\ln(1 + e^x)$
Exponential linear unit (ELU) ^[9]		$\begin{cases} \alpha (e^x - 1) & \text{if } x \leq 0 \\ x & \text{if } x > 0 \end{cases}$ with parameter α
Leaky rectified linear unit (Leaky ReLU) ^[11]		$\begin{cases} 0.01x & \text{if } x < 0 \\ x & \text{if } x \geq 0 \end{cases}$
Parametric rectified linear unit (PReLU) ^[12]		$\begin{cases} \alpha x & \text{if } x < 0 \\ x & \text{if } x \geq 0 \end{cases}$ with parameter α

(Fully-Connected) Feed Forward Neural Network

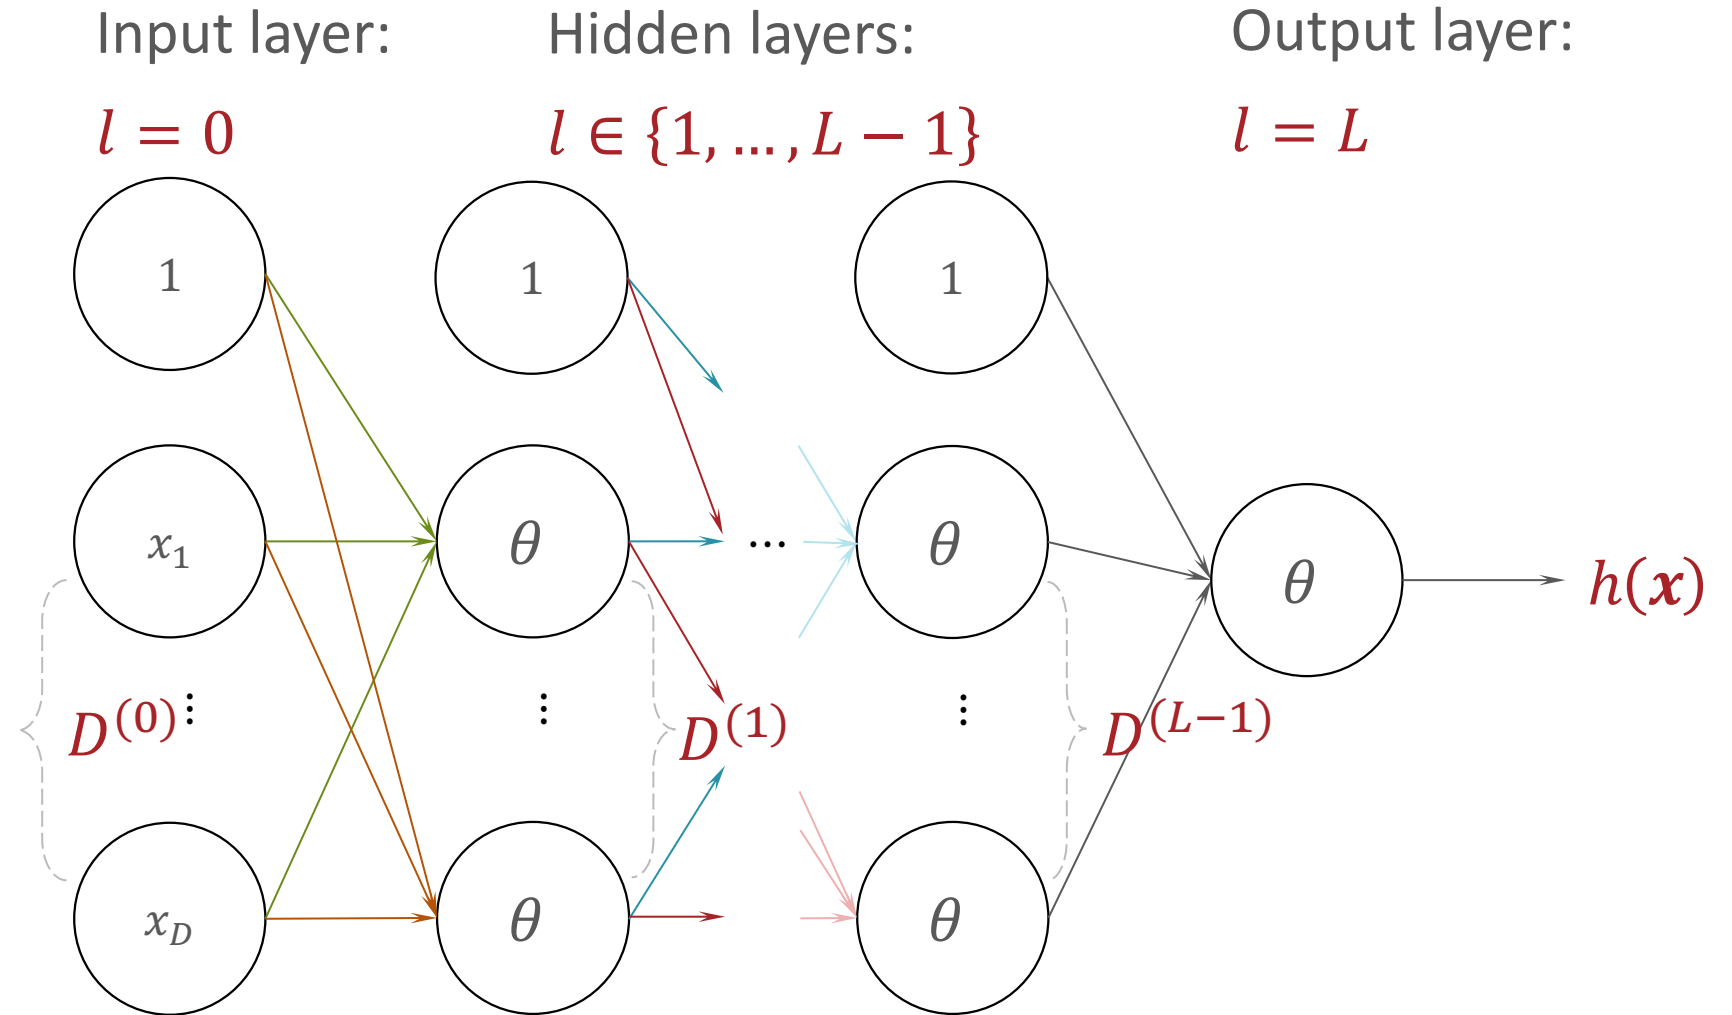


Layer l has dimension $D^{(l)}$ $\rightarrow$ Layer l has $D^{(l)} + 1$ nodes, counting the bias node

(Fully-Connected) Feed Forward Neural Network

The weights between layer $l - 1$ and layer l are a matrix:


$$W^{(l)} \in \mathbb{R}^{D^{(l)} \times (D^{(l-1)} + 1)}$$

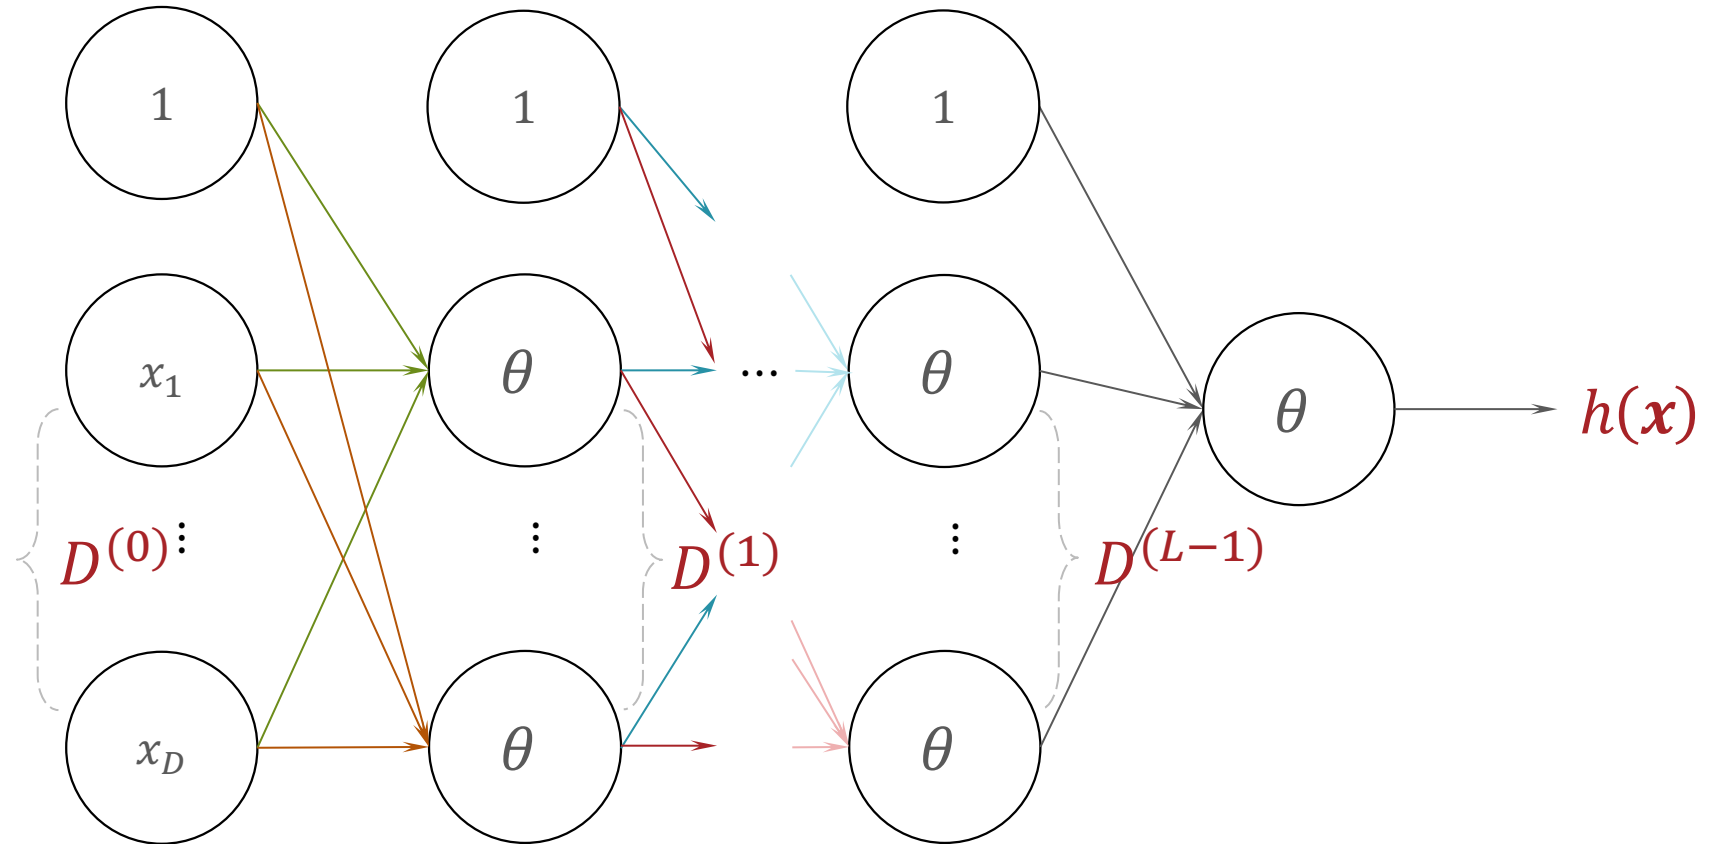

$w_{j,i}^{(l)}$ is the weight between node i in layer $l - 1$ and node j in layer l


Signal and Outputs

Every node has an incoming *signal* and outgoing *output*

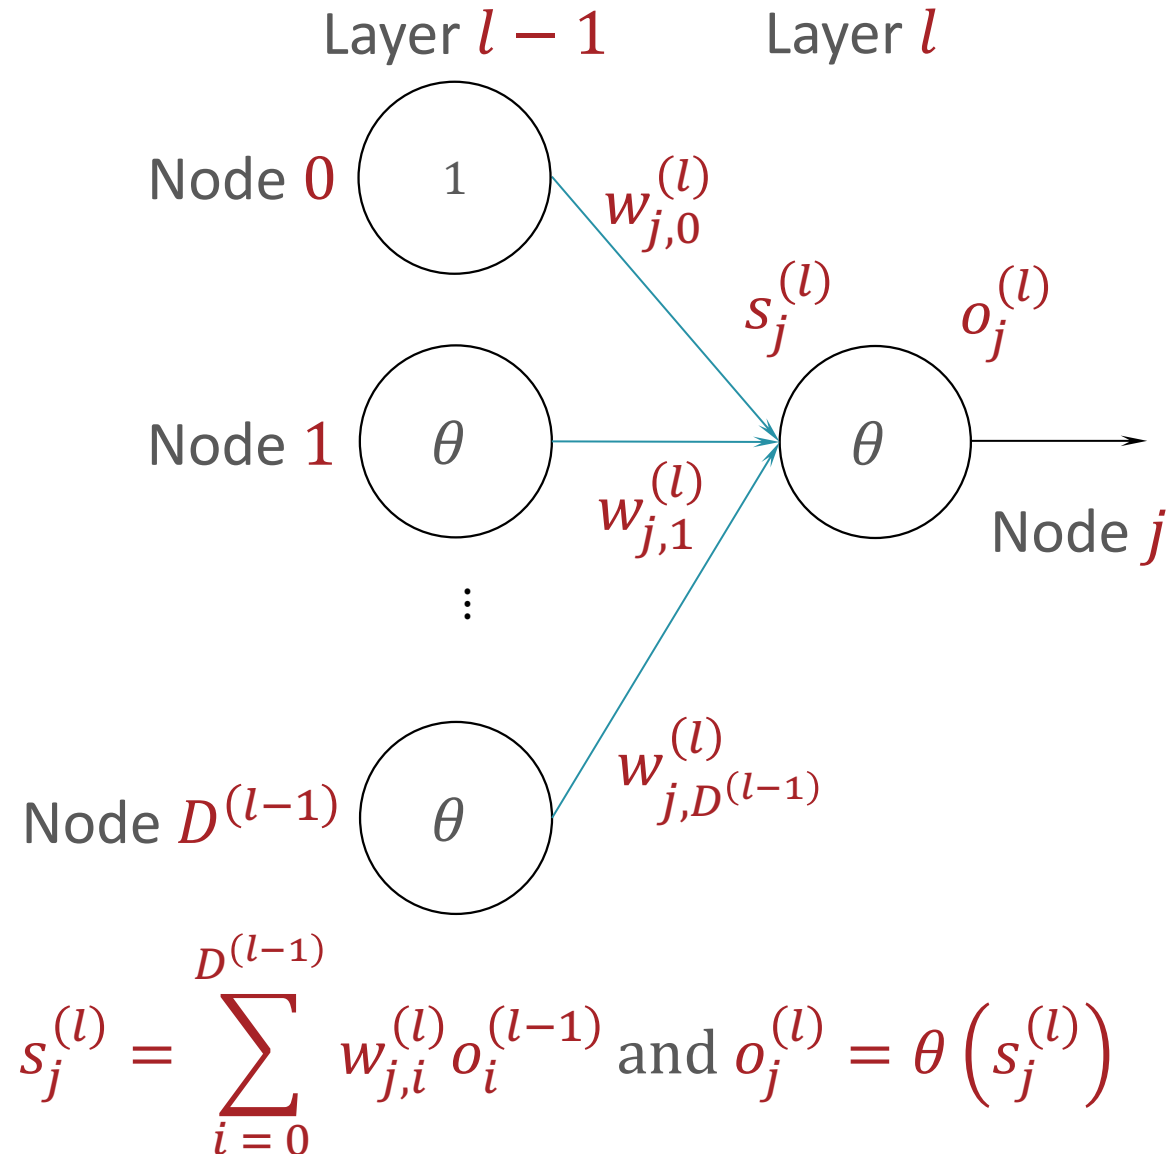

Signal and Outputs

Every node has an incoming *signal* and outgoing *output*

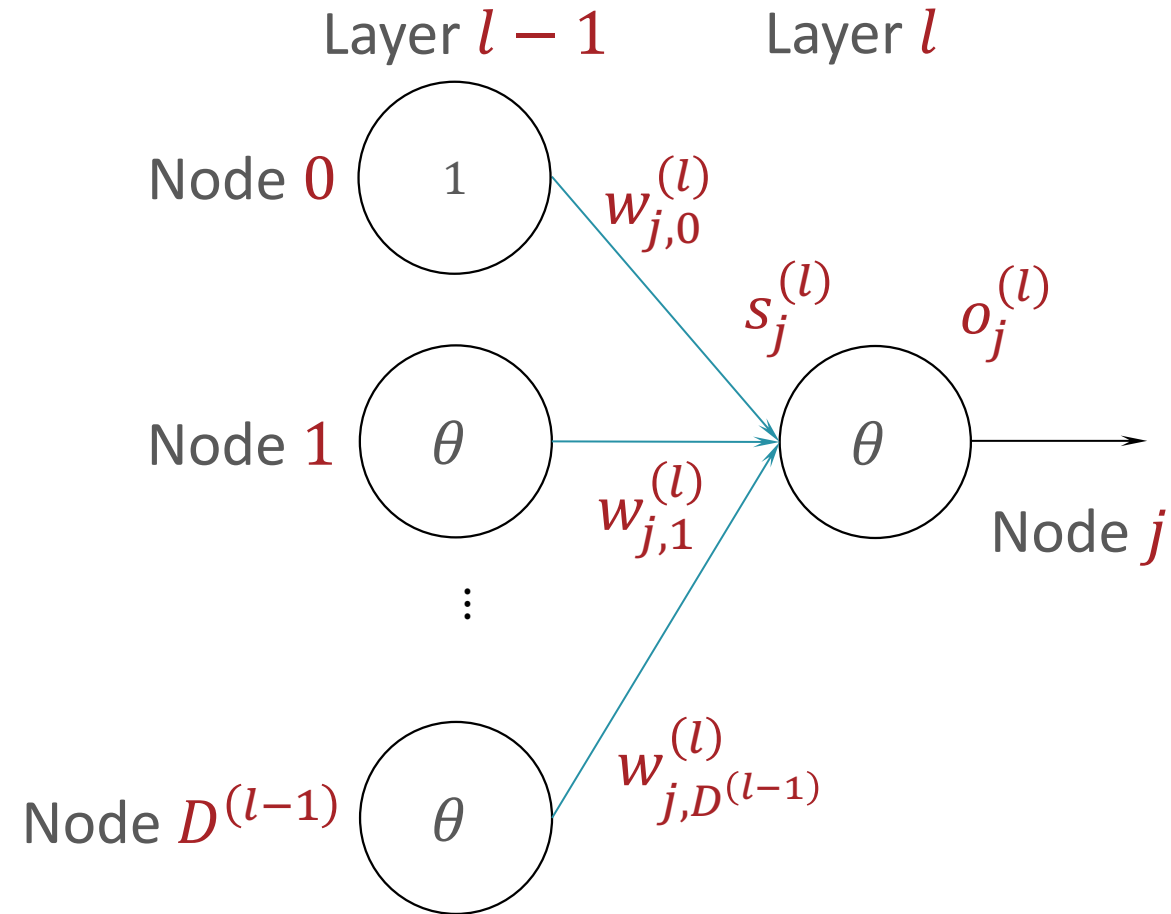

$$\mathbf{s}^{(l)} = \mathbf{W}^{(l)} \mathbf{o}^{(l-1)} \text{ and } \mathbf{o}^{(l)} = [1, \theta(\mathbf{s}^{(l)})]^T$$

Forward Propagation for Making Predictions

- Input: weights $W^{(1)}, \dots, W^{(L)}$ and a query data point $\mathbf{x}$
- Initialize $\mathbf{o}^{(0)} = [1, \mathbf{x}]^T$
- For $l = 1, \dots, L$
 - $\mathbf{s}^{(l)} = W^{(l)} \mathbf{o}^{(l-1)}$
 - $\mathbf{o}^{(l)} = [1, \theta(\mathbf{s}^{(l)})]^T$
- Output: $h_{W^{(1)}, \dots, W^{(L)}}(\mathbf{x}) = \mathbf{o}^{(L)}$

Gradient Descent for Learning

- Input: $\mathcal{D} = \{(\mathbf{x}^{(n)}, y^{(n)})\}_{n=1}^N, \eta^{(0)}$
- Initialize all weights $W_{(0)}^{(1)}, \dots, W_{(0)}^{(L)}$ to small, random numbers and set $t = 0$ (???)
- While TERMINATION CRITERION is not satisfied (???)
 - For $l = 1, \dots, L$
 - Compute $G^{(l)} = \nabla_{W^{(l)}} \ell_{\mathcal{D}}(W_{(t)}^{(1)}, \dots, W_{(t)}^{(L)})$ (???)
 - Update $W^{(l)}$: $W_{(t+1)}^{(l)} = W_{(t)}^{(l)} - \eta_0 G^{(l)}$
 - Increment t : $t = t + 1$
- Output: $W_{(t)}^{(1)}, \dots, W_{(t)}^{(L)}$

Loss Functions for Neural Networks

- Regression - squared error (same as linear regression!)

$$\ell_{\mathcal{D}} \left(W_{(t)}^{(1)}, \dots, W_{(t)}^{(L)} \right) = \sum_{n=1}^N \left(h_{W^{(1)}, \dots, W^{(L)}}(\mathbf{x}^{(n)}) - y^{(n)} \right)^2$$

- Binary classification - cross-entropy loss (same as logistic regression!)

- Assume $P(Y = 1 | \mathbf{x}, W^{(1)}, \dots, W^{(L)}) = h_{W^{(1)}, \dots, W^{(L)}}(\mathbf{x}^{(n)})$

$$\begin{aligned} \ell_{\mathcal{D}} \left(W_{(t)}^{(1)}, \dots, W_{(t)}^{(L)} \right) &= - \sum_{n=1}^N \log P(y^{(n)} | \mathbf{x}^{(n)}, W^{(1)}, \dots, W^{(L)}) \\ &= - \sum_{n=1}^N \log \left(h_{W^{(1)}, \dots, W^{(L)}}(\mathbf{x}^{(n)})^{y^{(n)}} \left(1 - h_{W^{(1)}, \dots, W^{(L)}}(\mathbf{x}^{(n)}) \right)^{1-y^{(n)}} \right) \\ &= - \sum_{n=1}^N y^{(n)} \log \left(h_{W^{(1)}, \dots, W^{(L)}}(\mathbf{x}^{(n)}) \right) \\ &\quad + (1 - y^{(n)}) \log \left(1 - h_{W^{(1)}, \dots, W^{(L)}}(\mathbf{x}^{(n)}) \right) \end{aligned}$$

Loss Functions for Neural Networks

- Multi-class classification - cross-entropy loss

- Express the label as a one-hot or one-of- C vector e.g.,

$$y = [0 \quad 0 \quad 1 \quad 0 \quad \dots \quad 0]$$

- Assume the neural network output is also be a vector of length C

$$P(y[c] = 1 | \mathbf{x}, W^{(1)}, \dots, W^{(L)}) = h_{W^{(1)}, \dots, W^{(L)}}(\mathbf{x}^{(n)})[c]$$

- Then the cross-entropy loss is

$$\begin{aligned} \ell_{\mathcal{D}}(W_{(t)}^{(1)}, \dots, W_{(t)}^{(L)}) &= - \sum_{n=1}^N \log P(y^{(n)} | \mathbf{x}^{(n)}, W^{(1)}, \dots, W^{(L)}) \\ &= - \sum_{n=1}^N \sum_{c=1}^C y[c] \log h_{W^{(1)}, \dots, W^{(L)}}(\mathbf{x}^{(n)})[c] \end{aligned}$$

Key Takeaways

- Perceptrons can be combined to achieve non-linear decision boundaries
- Feed-forward neural network model
 - Activation function
 - Layers: input, hidden & output
 - Weight matrices
 - Signals & outputs
- Forward propagation for making predictions
- Neural networks can use the same loss functions as other machine learning models (e.g., squared error for regression, cross-entropy for classification)