

15-213


"The course that gives CMU its Zip!"

Machine Language V: Miscellaneous Topics Sept. 25, 2001


Topics

- Linux Memory Layout
- Understanding Pointers
- Buffer Overflow
- Floating Point Code

class09.ppt

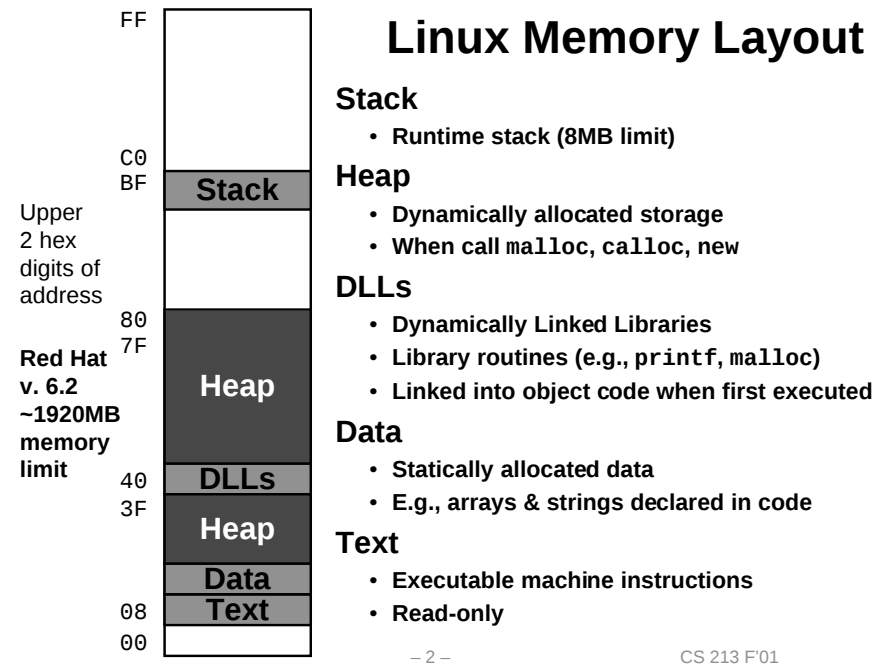

Linux Memory Allocation

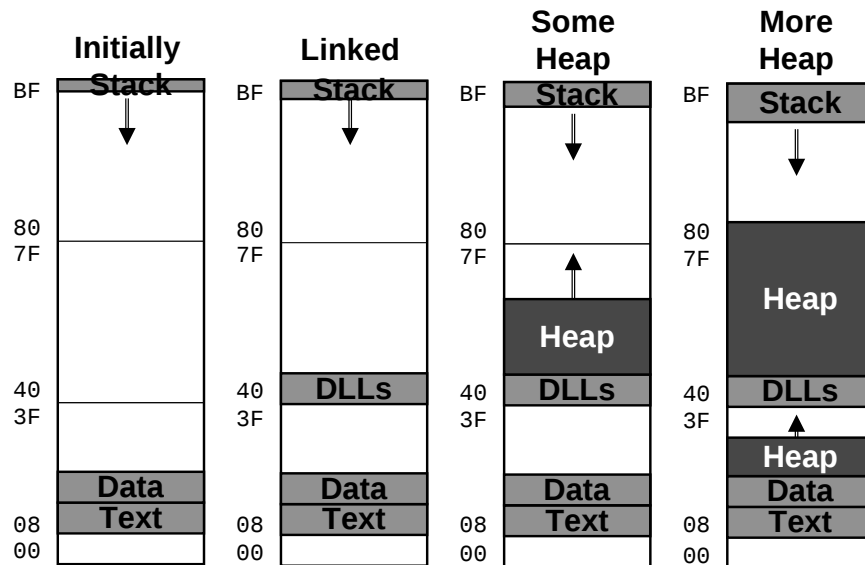

class09.ppt

- 3 -

CS 213 F'01

Memory Allocation Example

```
char big_array[1<<24]; /* 16 MB */
char huge_array[1<<28]; /* 256 MB */

int beyond;
char *p1, *p2, *p3, *p4;

int useless() { return 0; }

int main()
{
    p1 = malloc(1 << 28); /* 256 MB */
    p2 = malloc(1 << 8); /* 256 B */
    p3 = malloc(1 << 28); /* 256 MB */
    p4 = malloc(1 << 8); /* 256 B */
    /* Some print statements ... */
}
```

class09.ppt

- 4 -

CS 213 F'01

Dynamic Linking Example

```
(gdb) print malloc
$1 = {<text variable, no debug info>
0x8048454 <malloc>}
(gdb) run
Program exited normally.
(gdb) print malloc
$2 = {void *(unsigned int)}
0x40006240 <malloc>
```

Initially

- Code in text segment that invokes dynamic linker
- Address 0x8048454 should be read 0x08048454

Final

- Code in DLL region

class09.ppt

- 5 -

CS 213 F'01

Breakpointing Example

```
(gdb) break main
(gdb) run
Breakpoint 1, 0x804856f in main ()
(gdb) print $esp
$3 = (void *) 0xbffffc78
```

Main

- Address 0x804856f should be read 0x0804856f

Stack


- Address 0xbffffc78

class09.ppt

- 6 -

CS 213 F'01

Example Addresses

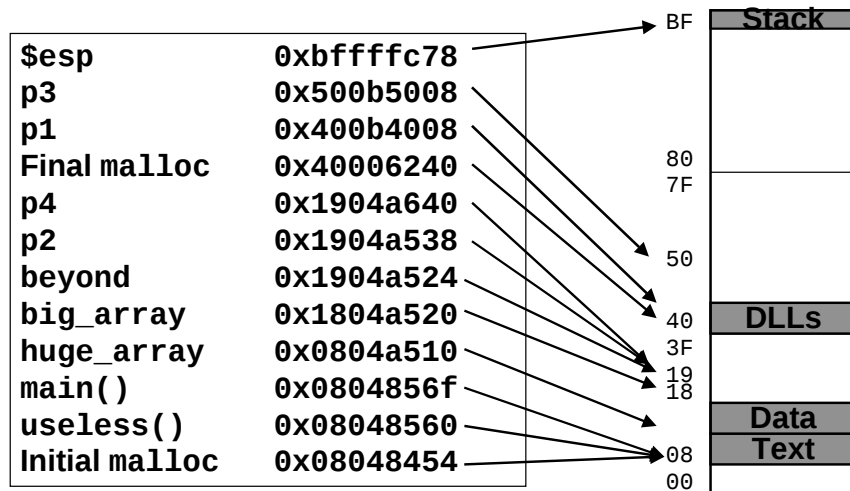

class09.ppt

- 7 -

CS 213 F'01

C operators

Operators

```
() [] -> .
! ~ ++ -- + - * & (type) sizeof
* / %
+ -
<< >>
< <= > >=
== !=
&
^
|
&&
||
?:
= += -= *= /= %= &= ^= != <<= >>=
,
```

Associativity

```
left to right
right to left
left to right
left to right
left to right
left to right
left to right
left to right
left to right
left to right
right to left
right to left
left to right
```

Note: Unary +, -, and * have higher precedence than binary forms

class09.ppt

- 8 -

CS 213 F'01

C pointer declarations

<code>int *p</code>	<code>p</code> is a pointer to <code>int</code>
<code>int *p[13]</code>	<code>p</code> is an array[13] of pointer to <code>int</code>
<code>int *(p[13])</code>	<code>p</code> is an array[13] of pointer to <code>int</code>
<code>int **p</code>	<code>p</code> is a pointer to a pointer to an <code>int</code>
<code>int (*p)[13]</code>	<code>p</code> is a pointer to an array[13] of <code>int</code>
<code>int *f()</code>	<code>f</code> is a function returning a pointer to <code>int</code>
<code>int (*f)()</code>	<code>f</code> is a pointer to a function returning <code>int</code>
<code>int (*(*f())[13])()</code>	<code>f</code> is a function returning ptr to an array[13] of pointers to functions returning <code>int</code>
<code>int (*(*x[3])())[5]</code>	<code>x</code> is an array[3] of pointers to functions returning pointers to array[5] of <code>ints</code>

class09.ppt

- 9 -

CS 213 F'01


Internet Worm and IM War

November, 1988

- Internet Worm attacks thousands of Internet hosts.
- How did it happen?

July, 1999

- Microsoft launches MSN Messenger (instant messaging system).
- Messenger clients can access popular AOL Instant Messaging Service (AIM) servers

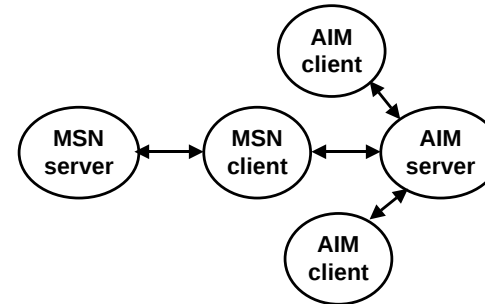

class09.ppt

- 10 -

CS 213 F'01

Internet Worm and IM War (cont.)

August 1999

- Mysteriously, Messenger clients can no longer access AIM servers.
- Microsoft and AOL begin the IM war:
 - AOL changes server to disallow Messenger clients
 - Microsoft makes changes to clients to defeat AOL changes.
 - At least 13 such skirmishes.
- How did it happen?

The Internet Worm and AOL/Microsoft War were both based on *stack buffer overflow* exploits!

- many Unix functions, such as `gets()` and `strcpy()`, do not check argument sizes.
- allows target buffers to overflow.

class09.ppt

- 11 -

CS 213 F'01

Vulnerable Buffer Code

```

/* Echo Line */
void echo()
{
    char buf[4]; /* Way too small! */
    gets(buf);
    puts(buf);
}
  
```

```

int main()
{
    printf("Type a string:");
    echo();
    return 0;
}
  
```

class09.ppt

- 12 -

CS 213 F'01

Buffer Overflow Executions

```
unix> ./bufdemo
Type a string:123
123
```

```
unix> ./bufdemo
Type a string:12345
Segmentation Fault
```


```
unix> ./bufdemo
Type a string:12345678
Segmentation Fault
```

class09.ppt

- 13 -

CS 213 F'01

Buffer Overflow Stack

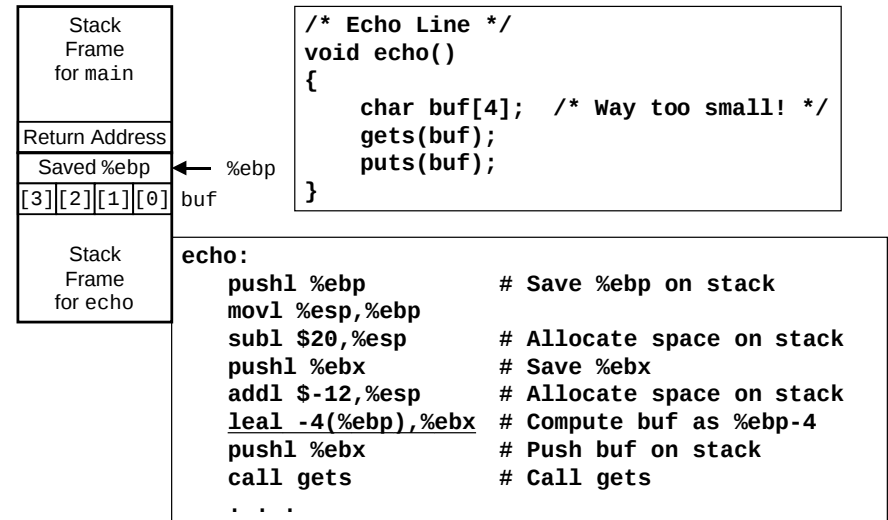


class09.ppt

- 14 -

CS 213 F'01


Buffer Overflow Stack Example

Before Call to gets



```

unix> gdb bufdemo
(gdb) break echo
Breakpoint 1 at 0x8048583
(gdb) run
Breakpoint 1, 0x8048583 in echo ()
(gdb) print /x *(unsigned *)$ebp
$1 = 0xbffff8f8
(gdb) print /x *((unsigned *)$ebp + 1)
$3 = 0x804864d
    
```

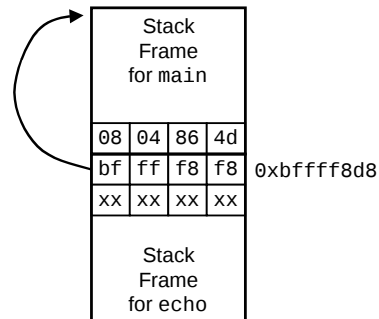

```

8048648: call 804857c <echo>
804864d: mov 0xffffffff8(%ebp),%ebx # Return Point
    
```

class09.ppt




- 15 -

CS 213 F'01

Buffer Overflow Stack Example #1

Before Call to gets

Input = "123"




No Problem

class09.ppt

- 16 -

CS 213 F'01

Buffer Overflow Stack Example #2

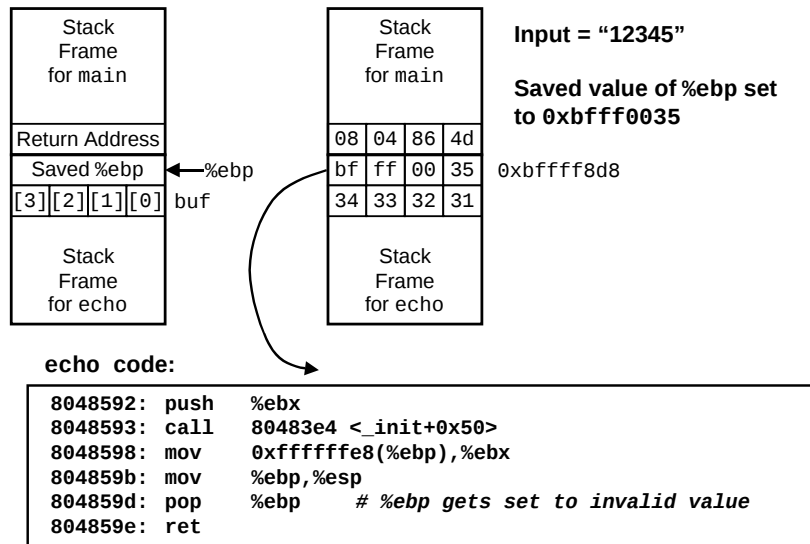


class09.ppt

- 17 -

CS 213 F'01

Buffer Overflow Stack Example

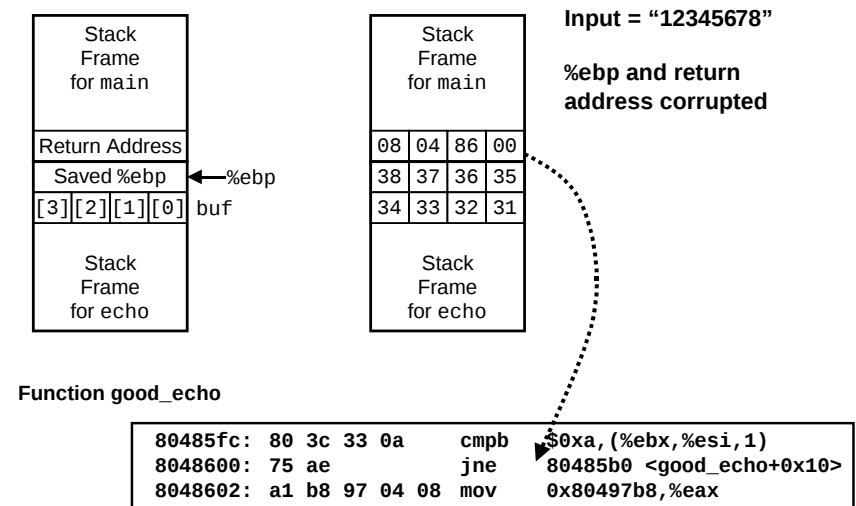


class09.ppt

- 18 -

CS 213 F'01

Malicious Use of Buffer Overflow

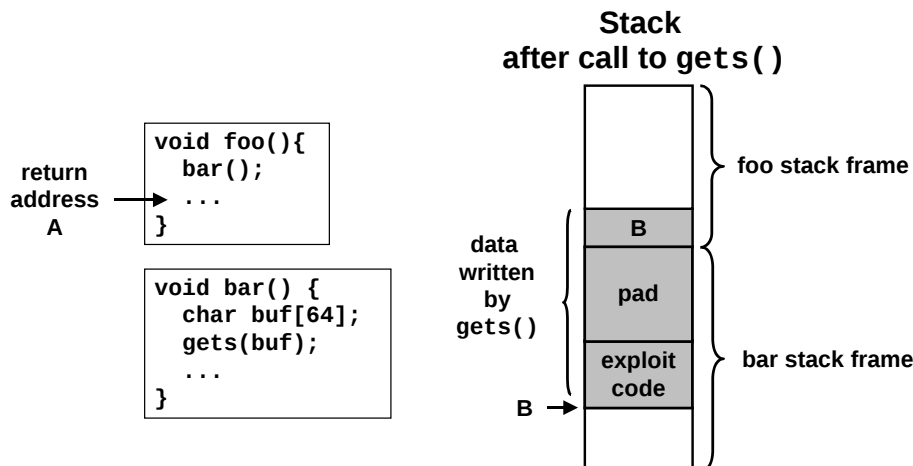

- Input string contains byte representation of executable code
- Overwrite return address with address of buffer
- When bar () executes ret, will jump to exploit code

class09.ppt

- 19 -

CS 213 F'01

Exploits based on buffer overflows

Buffer overflow bugs allow remote machines to execute arbitrary code on victim machines.

Internet worm

- Early versions of the finger server (fingerd) used gets () to read the argument sent by the client:
- *finger droh@cs.cmu.edu*
- Worm attacked fingerd server by sending phony argument:
- *finger "exploit code padding new return address"*
- exploit code: executed a root shell on the victim machine with a direct TCP connection to the attacker.

IM War

- AOL exploited existing buffer overflow bug in AIM clients
- exploit code: returned 4-byte signature (the bytes at some location in the AIM client) to server.
- When Microsoft changed code to match signature, AOL changed signature location.

class09.ppt

- 20 -

CS 213 F'01

Date: Wed, 11 Aug 1999 11:30:57 -0700 (PDT)
 From: Phil Bucking <philbucking@yahoo.com>
 Subject: AOL exploiting buffer overrun bug in their own software!
 To: rms@pharlap.com

Mr. Smith,

I am writing you because I have discovered something that I think you might find interesting because you are an Internet security expert with experience in this area. I have also tried to contact AOL but received no response.

I am a developer who has been working on a revolutionary new instant messaging client that should be released later this year.

...
 It appears that the AIM client has a buffer overrun bug. By itself this might not be the end of the world, as MS surely has had its share. But AOL is now *exploiting their own buffer overrun bug* to help in its efforts to block MS Instant Messenger.

....
 Since you have significant credibility with the press I hope that you can use this information to help inform people that behind AOL's friendly exterior they are nefariously compromising peoples' security.

Sincerely,
 Phil Bucking
 Founder, Bucking Consulting
 philbucking@yahoo.com

It was later determined that this email originated from within Microsoft!


class09.ppt

- 21 -

CS 213 F'01


FPU Data Register Stack

FPU register format (extended precision)



FPU registers

- 8 registers
- Logically forms shallow stack
- Top called %st(0)
- When push too many, bottom values disappear



class09.ppt

- 23 -

CS 213 F'01

IA32 Floating Point

History


- **8086**: first computer to implement IEEE FP
 – separate 8087 FPU (floating point unit)
- **486**: merged FPU and Integer Unit onto one chip

Summary

- Hardware to add, multiply, and divide
- Floating point data registers
- Various control & status registers

Floating Point Formats

- single precision (C float): 32 bits
- double precision (C double): 64 bits
- extended precision (C long double): 80 bits

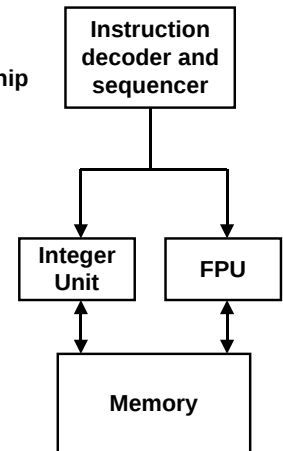

class09.ppt

- 22 -

CS 213 F'01

FPU instructions

Large number of floating point instructions and formats

- ~50 basic instruction types
- load, store, add, multiply
- sin, cos, tan, arctan, and log!

Sample instructions:

Instruction	Effect	Description
fldz	push 0.0	Load zero
flds Addr	push M[Addr]	Load single precision real
fmulb Addr	%st(0) <- %st(0)*M[Addr]	Multiply
faddp	%st(1) <- %st(0)+%st(1); pop	Add and pop

class09.ppt

- 24 -

CS 213 F'01

Floating Point Code Example

Compute Inner Product of Two Vectors

- Single precision arithmetic
- Scientific computing and signal processing workhorse

```
float ipf (float x[],
          float y[],
          int n)
{
    int i;
    float result = 0.0;

    for (i = 0; i < n; i++) {
        result += x[i] * y[i];
    }
    return result;
}
```

```
pushl %ebp          # setup
movl %esp,%ebp
pushl %ebx

movl 8(%ebp),%ebx   # %ebx=&x
movl 12(%ebp),%ecx  # %ecx=&y
movl 16(%ebp),%edx  # %edx=n
fldz               # push +0.0
xorl %eax,%eax     # i=0
cmpl %edx,%eax     # if i>=n done
jge .L3

.L5:
flds (%ebx,%eax,4) # push x[i]
fmuls (%ecx,%eax,4) # st(0)*=y[i]
faddp             # st(1)+=st(0); pop
incl %eax         # i++
cmpl %edx,%eax     # if i<n repeat
jl .L5

.L3:
movl -4(%ebp),%ebx # finish
movl %ebp, %esp
popl %ebp
ret               # st(0) = result
```

class09.ppt

- 25 -

CS 213 F'01

Inner Product Stack Trace

Initialization

1. fldz

0.0	%st(0)
-----	--------

Iteration 0

2. flds (%ebx,%eax,4)

0.0	%st(1)
x[0]	%st(0)

3. fmuls (%ecx,%eax,4)

0.0	%st(1)
x[0]*y[0]	%st(0)

4. faddp

0.0+x[0]*y[0]	%st(0)
---------------	--------

class09.ppt

- 26 -

Iteration 1

5. flds (%ebx,%eax,4)

x[0]*y[0]	%st(1)
x[1]	%st(0)

6. fmuls (%ecx,%eax,4)

x[0]*y[0]	%st(1)
x[1]*y[1]	%st(0)

7. faddp

x[0]*y[0]+x[1]*y[1]	%st(0)
---------------------	--------

CS 213 F'01

Final Observations

Memory Layout

- OS/machine dependent (including kernel version)
- Basic partitioning: stack/data/text/heap/DLL found in most machines

Type Declarations in C

- Notation obscure, but very systematic

Working with Strange Code

- Important to analyze nonstandard cases
 - E.g., what happens when stack corrupted due to buffer overflow
- Helps to step through with GDB

IA32 Floating Point

- Strange “shallow stack” architecture

class09.ppt

- 27 -

CS 213 F'01