

15-213

Code Optimization September 27, 2001

Topics

- **Machine-Independent Optimizations**
 - Code motion
 - Reduction in strength
 - Common subexpression sharing
- **Tuning**
 - Identifying performance bottlenecks

class10.ppt

Great Reality #4

There's more to performance than asymptotic complexity

Constant factors matter too!

- easily see 10:1 performance range depending on how code is written
- must optimize at multiple levels:
 - algorithm, data representations, procedures, and loops

Must understand system to optimize performance

- how programs are compiled and executed
- how to measure program performance and identify bottlenecks
- how to improve performance without destroying code modularity and generality

class10.ppt

– 2 –

CS 213 F'01

Optimizing Compilers

Provide efficient mapping of program to machine

- register allocation
- code selection and ordering
- eliminating minor inefficiencies

Don't (usually) improve asymptotic efficiency

- up to programmer to select best overall algorithm
- big-O savings are (often) more important than constant factors
 - but constant factors also matter

Have difficulty overcoming “optimization blockers”

- potential memory aliasing
- potential procedure side-effects

class10.ppt

– 3 –

CS 213 F'01

Limitations of Optimizing Compilers

Operate Under Fundamental Constraint

- Must not cause any change in program behavior under any possible condition
- Often prevents it from making optimizations when would only affect behavior under pathological conditions.

Behavior that may be obvious to the programmer can be obfuscated by languages and coding styles

- e.g., data ranges may be more limited than variable types suggest
 - e.g., using an “`int`” in C for what could be an enumerated type

Most analysis is performed only within procedures

- whole-program analysis is too expensive in most cases

Most analysis is based only on *static* information

- compiler has difficulty anticipating run-time inputs

When in doubt, the compiler must be conservative

class10.ppt

– 4 –

CS 213 F'01

Machine-Independent Optimizations

- Optimizations you should do regardless of processor / compiler

Code Motion

- Reduce frequency with which computation performed
 - If it will always produce same result
 - Especially moving code out of loop

```
for (i = 0; i < n; i++)  
  for (j = 0; j < n; j++)  
    a[n*i + j] = b[j];  
→  
for (i = 0; i < n; i++) {  
  int ni = n*i;  
  for (j = 0; j < n; j++)  
    a[ni + j] = b[j];  
}
```

class10.ppt

– 5 –

CS 213 F'01

Compiler-Generated Code Motion

- Most compilers do a good job with array code + simple loop structures

Code Generated by GCC

```
for (i = 0; i < n; i++)  
  for (j = 0; j < n; j++)  
    a[n*i + j] = b[j];
```

```
for (i = 0; i < n; i++) {  
  int ni = n*i;  
  int *p = a+ni;  
  for (j = 0; j < n; j++)  
    *p++ = b[j];  
}
```

```
imull %ebx,%eax      # i*n  
movl 8(%ebp),%edi     # a  
leal (%edi,%eax,4),%edx # p = a+i*n (scaled by 4)  
# Inner Loop  
.L40:  
movl 12(%ebp),%edi    # b  
movl (%edi,%ecx,4),%eax # b+j (scaled by 4)  
movl %eax,%edx        # *p = b[j]  
addl $4,%edx         # p++ (scaled by 4)  
incl %ecx             # j++  
jle .L40              # loop if j<n
```

class10.ppt

– 6 –

CS 213 F'01

Reduction in Strength

- Replace costly operation with simpler one
- Shift, add instead of multiply or divide
 - $16*x \rightarrow x \ll 4$
 - Utility machine dependent
 - Depends on cost of multiply or divide instruction
 - On Pentium II or III, integer multiply only requires 4 CPU cycles

```
for (i = 0; i < n; i++)  
  for (j = 0; j < n; j++)  
    a[n*i + j] = b[j];  
→  
int ni = 0;  
for (i = 0; i < n; i++) {  
  for (j = 0; j < n; j++)  
    a[ni + j] = b[j];  
  ni += n;  
}
```

class10.ppt

– 7 –

CS 213 F'01

Make Use of Registers

- Reading and writing registers much faster than reading/writing memory

Limitation

- Compiler not always able to determine whether variable can be held in register
- Possibility of *Aliasing*
- See example later

class10.ppt

– 8 –

CS 213 F'01

Machine-Independent Opts. (Cont.)

Share Common Subexpressions

- Reuse portions of expressions
- Compilers often not very sophisticated in exploiting arithmetic properties

```
/* Sum neighbors of i,j */
up = val[(i-1)*n + j];
down = val[(i+1)*n + j];
left = val[i*n + j-1];
right = val[i*n + j+1];
sum = up + down + left + right;
```


3 multiplications: $i*n$, $(i-1)*n$, $(i+1)*n$

```
int inj = i*n + j;
up = val[inj - n];
down = val[inj + n];
left = val[inj - 1];
right = val[inj + 1];
sum = up + down + left + right;
```

1 multiplication: $i*n$

```
leal -1(%edx),%ecx # i-1
imull %ebx,%ecx # (i-1)*n
leal 1(%edx),%eax # i+1
imull %ebx,%eax # (i+1)*n
imull %ebx,%edx # i*n
```

Vector ADT



Procedures

vec_ptr new_vec(int len)

– Create vector of specified length

int get_vec_element(vec_ptr v, int index, int *dest)

– Retrieve vector element, store at *dest

– Return 0 if out of bounds, 1 if successful

int *get_vec_start(vec_ptr v)

– Return pointer to start of vector data

- Similar to array implementations in Pascal, ML, Java

– E.g., always do bounds checking

Optimization Example

```
void combine1(vec_ptr v, int *dest)
{
    int i;
    *dest = 0;
    for (i = 0; i < vec_length(v); i++) {
        int val;
        get_vec_element(v, i, &val);
        *dest += val;
    }
}
```

Procedure

- Compute sum of all elements of vector
- Store result at destination location

Time Scales

Absolute Time


- Typically use nanoseconds
 - 10^{-9} seconds
- Time scale of computer instructions

Clock Cycles

- Most computers controlled by high frequency clock signal
- Typical Range
 - 100 MHz
 - » 10^8 cycles per second
 - » Clock period = 10ns
 - 2 GHz
 - » 2×10^9 cycles per second
 - » Clock period = 0.5ns
- Fish machines: 550 MHz (1.8 ns clock period)

Cycles Per Element

- Convenient way to express performance of program that operators on vectors or lists
- Length = n
- $T = CPE \cdot n + \text{Overhead}$

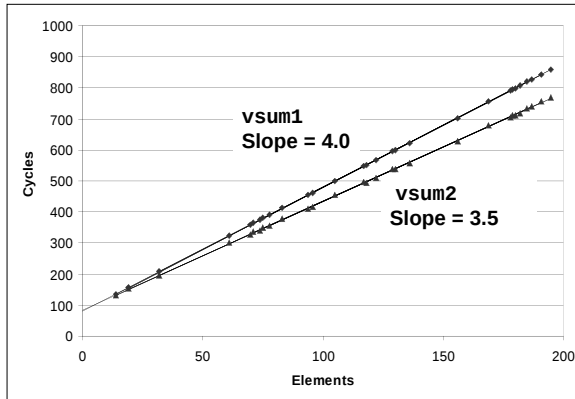

class10.ppt

- 13 -

CS 213 F'01

Optimization Example

```
void combine1(vec_ptr v, int *dest)
{
    int i;
    *dest = 0;
    for (i = 0; i < vec_length(v); i++) {
        int val;
        get_vec_element(v, i, &val);
        *dest += val;
    }
}
```

Procedure

- Compute sum of all elements of integer vector
- Store result at destination location
- Vector data structure and operations defined via abstract data type

Pentium II/III Performance: Clock Cycles / Element

- 42.06 (Compiled -g) 31.25 (Compiled -O2)

class10.ppt

- 14 -

CS 213 F'01

Understanding Loop

```
void combine1-goto(vec_ptr v, int *dest)
{
    int i = 0;
    int val;
    *dest = 0;
    if (i >= vec_length(v))
        goto done;
loop:
    get_vec_element(v, i, &val);
    *dest += val;
    i++;
    if (i < vec_length(v))
        goto loop;
done:
}
```

} 1 iteration

Inefficiency

- Procedure `vec_length` called every iteration
- Even though result always the same

class10.ppt

- 15 -

CS 213 F'01

Move `vec_length` Call Out of Loop

```
void combine2(vec_ptr v, int *dest)
{
    int i;
    int length = vec_length(v);
    *dest = 0;
    for (i = 0; i < length; i++) {
        int val;
        get_vec_element(v, i, &val);
        *dest += val;
    }
}
```

Optimization

- Move call to `vec_length` out of inner loop
 - Value does not change from one iteration to next
 - Code motion
- CPE: 20.66 (Compiled -O2)
 - `vec_length` requires only constant time, but significant overhead

class10.ppt

- 16 -

CS 213 F'01

Code Motion Example #2


Procedure to Convert String to Lower Case

```
void lower(char *s)
{
    int i;
    for (i = 0; i < strlen(s); i++)
        if (s[i] >= 'A' && s[i] <= 'Z')
            s[i] -= ('A' - 'a');
}
```

- Extracted from 213 lab submissions, Fall, 1998

Lower Case Conversion Performance

- Time quadruples when double string length
- Quadratic performance

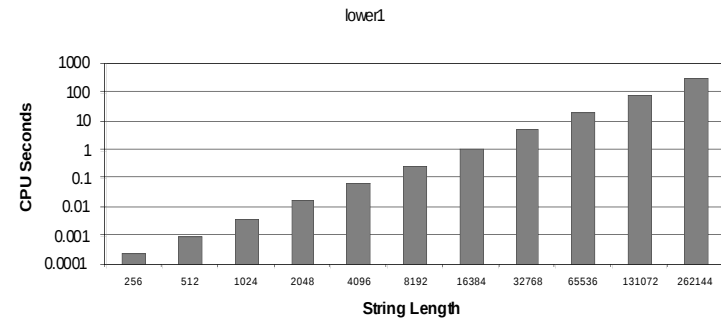

Convert Loop To Goto Form

```
void lower(char *s)
{
    int i = 0;
    if (i >= strlen(s))
        goto done;
loop:
    if (s[i] >= 'A' && s[i] <= 'Z')
        s[i] -= ('A' - 'a');
    i++;
    if (i < strlen(s))
        goto loop;
done:
}
```

- `strlen` executed every iteration
- `strlen` linear in length of string
 - Must scan string until finds `'\0'`
- Overall performance is quadratic


Improving Performance

```
void lower(char *s)
{
    int i;
    int len = strlen(s);
    for (i = 0; i < len; i++)
        if (s[i] >= 'A' && s[i] <= 'Z')
            s[i] -= ('A' - 'a');
}
```

- Move call to `strlen` outside of loop
- Since result does not change from one iteration to another
- Form of code motion

Lower Case Conversion Performance

- Time doubles when double string length
- Linear performance

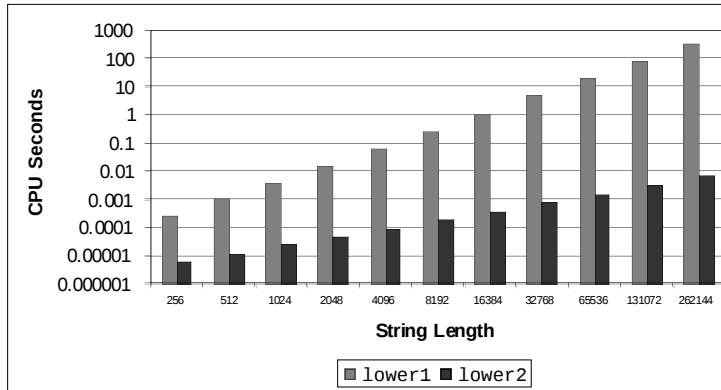

class10.ppt

- 21 -

CS 213 F'01

Optimization Blocker: Procedure Calls

Why couldn't the compiler move vec_len or strlen out of the inner loop?

- **Procedure May Have Side Effects**
 - i.e., alters global state each time called
- **Function May Not Return Same Value for Given Arguments**
 - Depends on other parts of global state
 - Procedure lower could interact with strlen

Why doesn't compiler look at code for vec_len or strlen?

- **Linker may overload with different version**
 - Unless declared static
- **Interprocedural optimization is not used extensively due to cost**

Warning:

- **Compiler treats procedure call as a black box**
- **Weak optimizations in and around them**

class10.ppt

- 22 -

CS 213 F'01

Reduction in Strength

```
void combine3(vec_ptr v, int *dest)
{
    int i;
    int length = vec_length(v);
    int *data = get_vec_start(v);
    *dest = 0;
    for (i = 0; i < length; i++) {
        *dest += data[i];
    }
}
```

Optimization

- **Avoid procedure call to retrieve each vector element**
 - Get pointer to start of array before loop
 - Within loop just do pointer reference
 - Not as clean in terms of data abstraction
- **CPE: 6.00 (Compiled -O2)**
 - Procedure calls are expensive!
 - Bounds checking is expensive

class10.ppt

- 23 -

CS 213 F'01

Eliminate Unneeded Memory References

```
void combine4(vec_ptr v, int *dest)
{
    int i;
    int length = vec_length(v);
    int *data = get_vec_start(v);
    int sum = 0;
    for (i = 0; i < length; i++)
        sum += data[i];
    *dest = sum;
}
```

Optimization

- **Don't need to store in destination until end**
- **Local variable sum held in register**
- **Avoids 1 memory read, 1 memory write per cycle**
- **CPE: 2.00 (Compiled -O2)**
 - Memory references are expensive!

class10.ppt

- 24 -

CS 213 F'01

Detecting Unneeded Memory References

Combine3

```
.L18:
    movl (%ecx,%edx,4),%eax
    addl %eax, (%edi)

    incl %edx
    cmpl %esi,%edx
    jl .L18
```

Combine4

```
.L24:
    addl (%eax,%edx,4),%ecx

    incl %edx
    cmpl %esi,%edx
    jl .L24
```

Performance

- **Combine3**
 - 5 instructions in 6 clock cycles
 - addl must read and write memory
- **Combine4**
 - 4 instructions in 2 clock cycles

class10.ppt

– 25 –

CS 213 F'01

Optimization Blocker: Memory Aliasing

Aliasing

- Two different memory references specify single location

Example

- v: [3, 2, 17]
- combine3(v, get_vec_start(v)+2) --> ?
- combine4(v, get_vec_start(v)+2) --> ?

Observations

- **Easy to have happen in C**
 - Since allowed to do address arithmetic
 - Direct access to storage structures
- **Get in habit of introducing local variables**
 - Accumulating within loops
 - Your way of telling compiler not to check for aliasing

class10.ppt

– 26 –

CS 213 F'01

Machine-Independent Opt. Summary

Code Motion

- *Compilers are good at this for simple loop/array structures*
- *Don't do well in presence of procedure calls and memory aliasing*

Reduction in Strength

- **Shift, add instead of multiply or divide**
 - *compilers are (generally) good at this*
 - *Exact trade-offs machine-dependent*
- **Keep data in registers rather than memory**
 - *compilers are not good at this, since concerned with aliasing*

Share Common Subexpressions

- *compilers have limited algebraic reasoning capabilities*

class10.ppt

– 27 –

CS 213 F'01

Important Tools

Measurement

- **Accurately compute time taken by code**
 - Most modern machines have built in cycle counters
 - Using them to get reliable measurements is tricky
- **Profile procedure calling frequencies**
 - Unix tool gprof

Observation

- **Generating assembly code**
 - Lets you see what optimizations compiler can make
 - Understand capabilities/limitations of particular compiler

class10.ppt

– 28 –

CS 213 F'01

Code Profiling Example

Task

- Count word frequencies in text document
- Produce sorted list of words from most frequent to least

Steps

- Convert strings to lowercase
- Apply hash function
- Read words and insert into hash table
 - Mostly list operations
 - Maintain counter for each unique word
- Sort results

Data Set

- Collected works of Shakespeare
- 946,596 total words, 26,596 unique
- Initial implementation: 9.2 seconds

Shakespeare's
most frequent words

29,801	the
27,529	and
21,029	I
20,957	to
18,514	of
15,370	a
14,010	you
12,936	my
11,722	in
11,519	that

Code Profiling

Augment Executable Program with Timing Functions

- Computes (approximate) amount of time spent in each function
- Time computation method
 - Periodically (~ every 10ms) interrupt program
 - Determine what function is currently executing
 - Increment its timer by interval (e.g., 10ms)
- Also maintains counter for each function indicating number of times called

Using

`gcc -O2 -pg prog. -o prog`

`./prog`

– Executes in normal fashion, but also generates file `gmon.out`

`gprof prog`

– Generates profile information based on `gmon.out`

Profiling Results

% time	cumulative seconds	self seconds	calls	self ms/call	total ms/call	name
86.60	8.21	8.21	1	8210.00	8210.00	sort_words
5.80	8.76	0.55	946596	0.00	0.00	lower1
4.75	9.21	0.45	946596	0.00	0.00	find_ele_rec
1.27	9.33	0.12	946596	0.00	0.00	h_add


Call Statistics

- Number of calls and cumulative time for each function

Performance Limiter


- Using inefficient sorting algorithm
- Single call uses 87% of CPU time

Code Optimizations

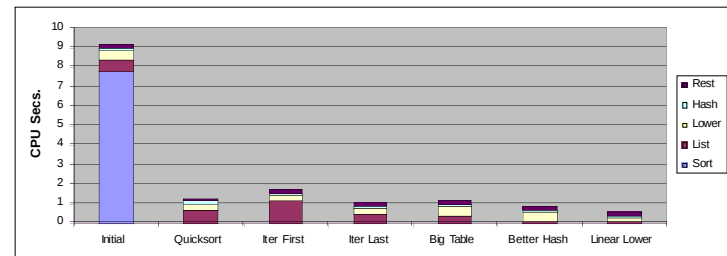

- First step: Use more efficient sorting function
- Library function `qsort`

Further Optimizations

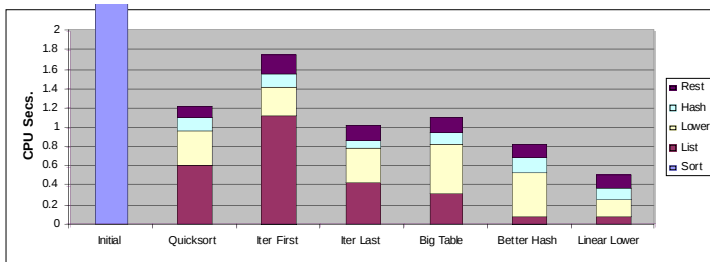

- **Iter first:** Use iterative function to insert elements in linked list
 - Causes code to slow down
- **Iter last:** Iterative function, places new entry at end of list
 - Tend to place most common words at front of list
- **Big table:** Increase number of hash buckets
- **Better hash:** Use more sophisticated hash function
- **Linear lower:** Move `strlen` out of loop

Profiling Observations

Benefits

- Helps identify performance bottlenecks
- Especially useful when have complex system with many components

Limitations

- Only shows performance for data tested
- E.g., linear lower did not show big gain, since words are short
 - Quadratic inefficiency could remain lurking in code
- Timing mechanism fairly crude
 - Only works for programs that run for > 3 seconds