

Great Theoretical Ideas In Computer Science		
Anupam Gupta		CS 15-251 Fall 2005
Lecture 1	Aug 29 th , 2005	Carnegie Mellon University

Pancakes With A Problem!

Course Staff

Prof: Anupam Gupta
John Lafferty

TAs: Kanat Tangwongsan
Yinmeng Zhang

<http://www.cs.cmu.edu/~15251>
Please check the webpages regularly!

((()))

Please feel free to ask questions!

Course Document

You must read this carefully.

1. Grading formula for the course.
 - a) 40% homework
 - b) 5% in-class quizzes
 - c) 25% in-recitation tests
 - d) 30% final
2. Seven points a day late penalty.
3. Collaboration/Cheating Policy
 - a) You may NOT share written work.
 - b) We reuse homework problems.

Great Theoretical Ideas In Computer Science		
Anupam Gupta		CS 15-251 Fall 2005
Lecture 1	Aug 29 th , 2005	Carnegie Mellon University


Pancakes With A Problem!

The chef at our place is sloppy, and when he prepares a stack of pancakes they come out all different sizes.


Therefore, when I deliver them to a customer, on the way to the table I rearrange them (so that the smallest winds up on top, and so on, down to the largest at the bottom)

I do this by grabbing several from the top and flipping them over, repeating this (varying the number I flip) as many times as necessary.


Developing A Notation:
Turning pancakes into numbers




Developing A Notation:
Turning pancakes into numbers





Developing A Notation:
Turning pancakes into numbers

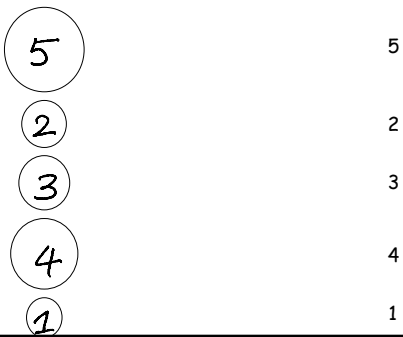


Developing A Notation:
Turning pancakes into numbers






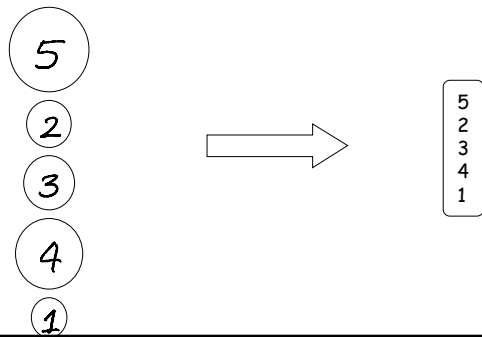








How do we sort this stack?
How many flips do we need?



How do we sort this stack?
How many flips do we need?

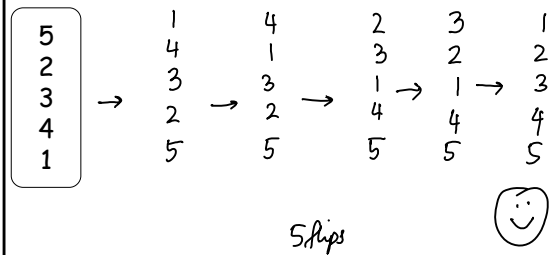

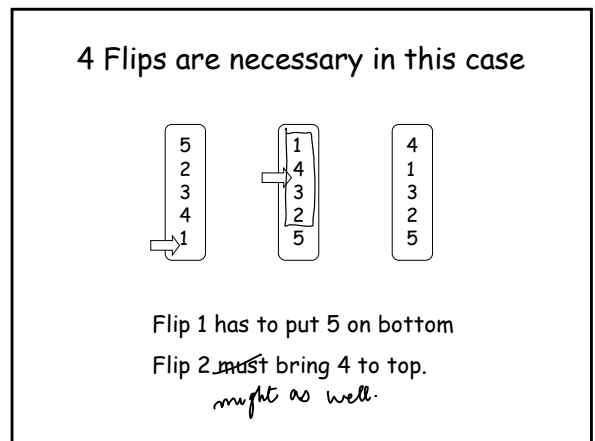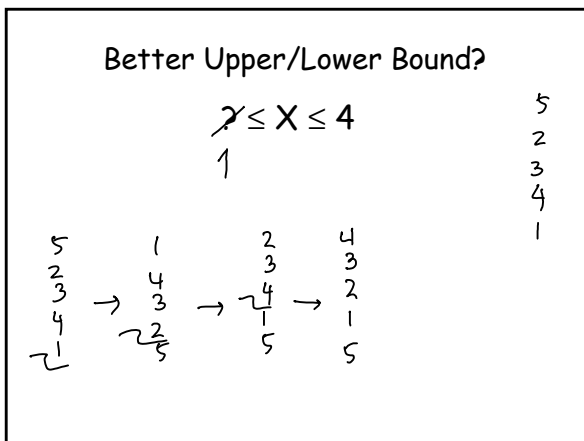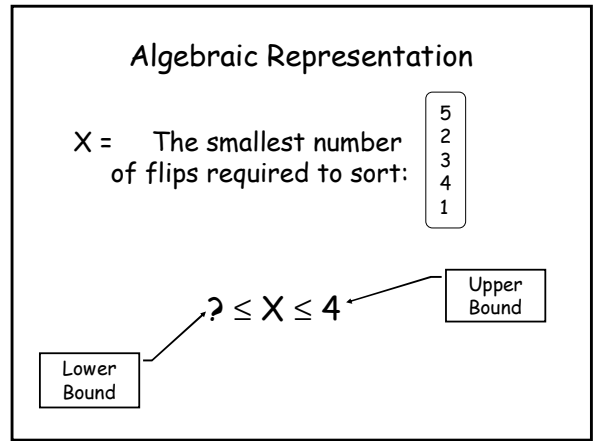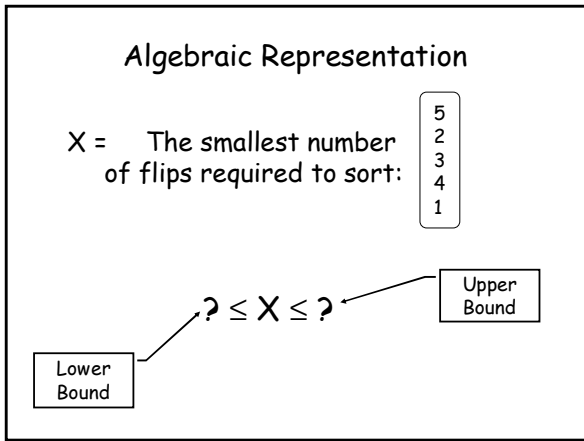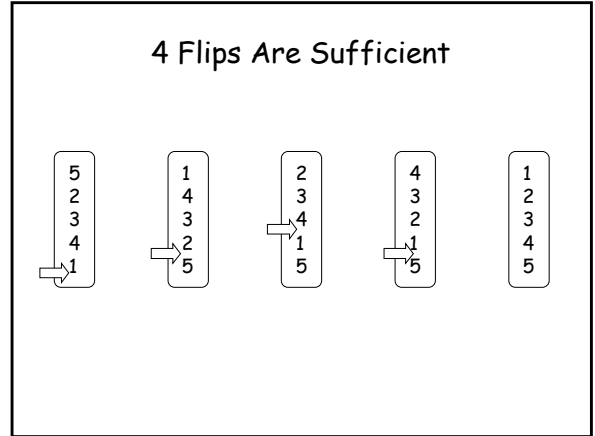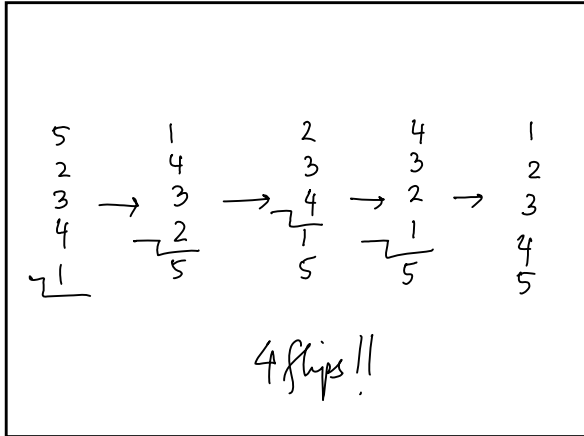

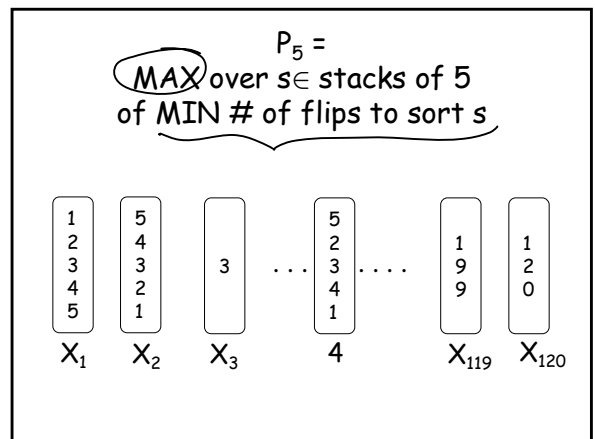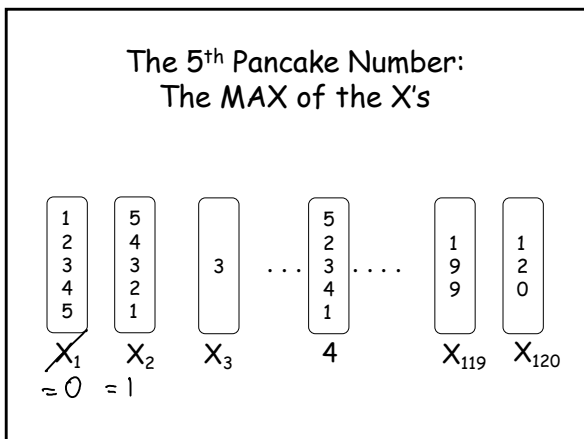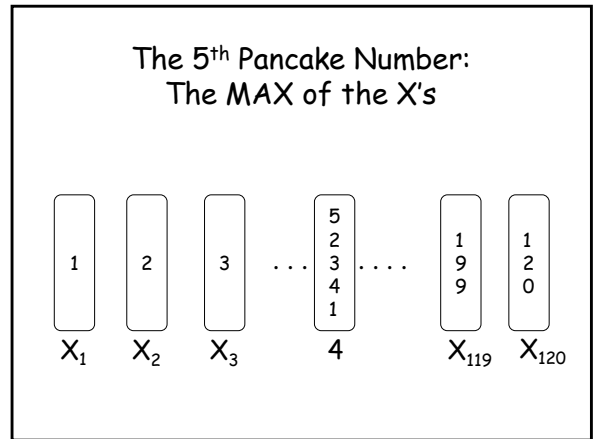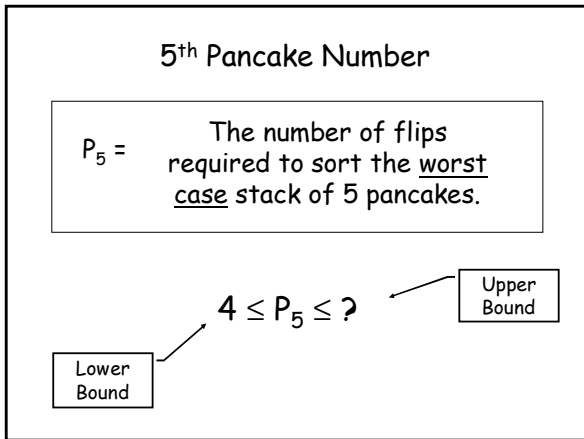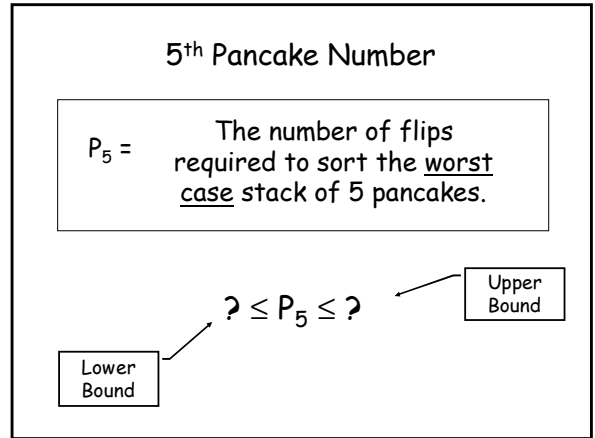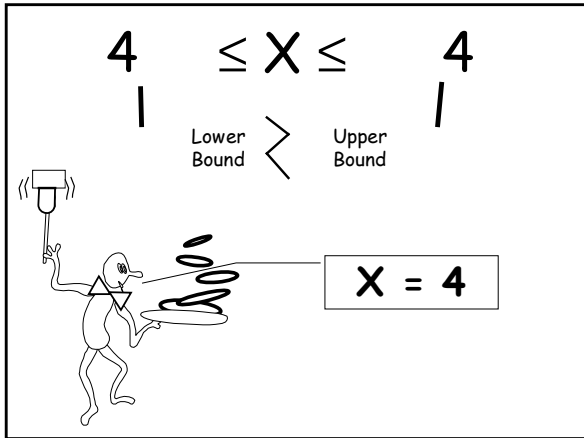


$P_n =$
 MAX over $s \in$ stacks of n pancakes
 of MIN # of flips to sort s

$P_n =$
 The number of flips required to sort the
 worst-case stack of n pancakes.

$P_n =$
 MAX over $s \in$ stacks of n pancakes
 of MIN # of flips to sort s

$P_n =$
 The number of flips required to sort a
 worst-case stack of n pancakes.

$P_n =$
 The number of flips required to sort a
 worst-case stack of n pancakes.

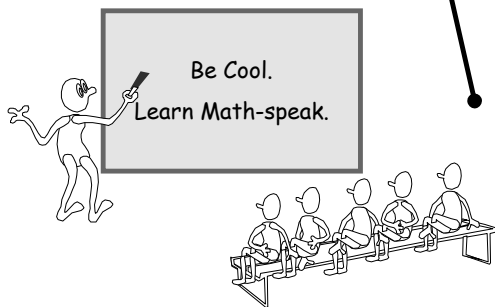

What is P_n for small n ?

$$\begin{matrix} 1 & 3 & 2 & 1 \\ 3 & \rightarrow & 1 & \rightarrow & 1 & \rightarrow & 2 \\ 2 & & 2 & & 3 & & 3 \end{matrix}$$

Can you do
 $n = 0, 1, 2, 3$?

$P_0 = 0$ $P_2 = 1$
 $P_1 = 0$ $P_3 = 3$

Initial Values Of P_n

n	0	1	2	3
P_n	0	0	1	3

$P_3 = 3$

$$\begin{matrix} 1 \\ 3 \\ 2 \end{matrix}$$

requires 3 Flips, hence $P_3 \geq 3$.

{ ANY stack of 3 can be done by getting the big one to the bottom (≤ 2 flips), and then using ≤ 1 extra flip to handle the top two. Hence, $P_3 = 3$.

$\rightarrow P_3 \leq 3$

n^{th} Pancake Number

$P_n =$ The number of flips required to sort a worst case stack of n pancakes.


Lower Bound $\rightarrow ? \leq P_n \leq ? \leftarrow$ Upper Bound

Bracketing:

What are the best lower and upper bounds that I can prove?


$$\leq f(x) \leq$$

$$? \leq P_n \leq ?$$



Take a few minutes to try and prove upper and lower bounds on P_n , for $n > 3$.

Bring-to-top Method

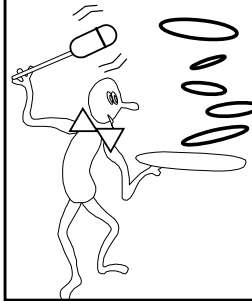

Bring biggest to top.
Place it on bottom.
Bring next largest to top.
Place second from bottom.
And so on...

Upper Bound On P_n : Bring To Top Method For n Pancakes

If $n=1$, no work required - we are done!
Otherwise, flip pancake n to top and then flip it to position n .

Now use:

Bring To Top Method
For $n-1$ Pancakes

Total Cost: at most $2(n-1) = 2n - 2$ flips.

Better Upper Bound On P_n : Bring To Top Method For n Pancakes

If $n=2$, at most one flip and we are done.
Otherwise, flip pancake n to top and then flip it to position n .


Now use:

Bring To Top Method
For $n-1$ Pancakes

$$P_n \leq 2n - 3.$$


Total Cost: at most $2(n-2) + 1 = 2n - 3$ flips.

Bring to top not always optimal for a particular stack

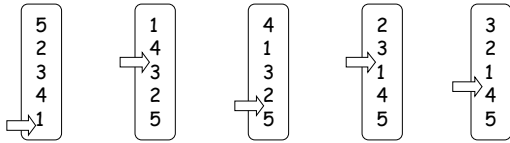

Bring-to-top takes 5 flips, but we can do in 4 flips


$$? \leq P_n \leq 2n-3 \quad \text{for } n \geq 2.$$



What other bounds can you prove on P_n ?

for $n=3$, $P_3=3$.


Better Upper/Lower Bounds?



Breaking Apart Argument

Suppose a stack S contains a pair of adjacent pancakes that will not be adjacent in the sorted stack.

Any sequence of flips that sorts stack S must involve one flip that inserts the spatula between that pair and breaks them apart.

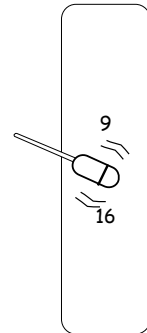


Breaking Apart Argument

Suppose a stack S contains a pair of adjacent pancakes that will not be adjacent in the sorted stack.


Any sequence of flips that sorts stack S must involve one flip that inserts the spatula between that pair and breaks them apart.

Furthermore, this same principle is true of the "pair" formed by the bottom pancake of S and the plate.

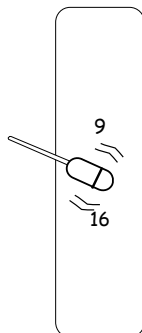

$$n \leq P_n$$

Suppose n is even. S contains n pairs that will need to be broken apart during any sequence that sorts stack S .



$n \leq P_n$

Suppose n is even.
 S contains n pairs that will need to be broken apart during any sequence that sorts stack S .

Detail: This construction only works when $n \geq 2$

$P_2 = 1$

S
 2
 1

$n \leq P_n$

Suppose n is odd.
 S contains n pairs that will need to be broken apart during any sequence that sorts stack S .

S
 1
 3
 5
 7
 .
 .
 .
 n
 2
 4
 6
 8
 .
 .
 .
 $n-1$


$n \leq P_n$

Suppose n is odd.
 S contains n pairs that will need to be broken apart during any sequence that sorts stack S .

Detail: This construction only works when $n \geq 3$


S
 1
 3
 2

$n \leq P_n \leq 2n - 3$ for $n \geq 3$

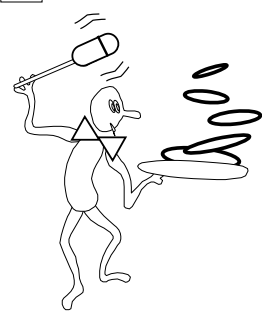

Bring To Top is within a factor of two of optimal!


$n \leq P_n \leq 2n - 3$ for $n \geq 3$

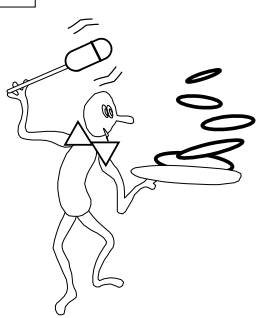

Starting from ANY stack we can get to the sorted stack using no more than P_n flips.

From ANY stack to sorted stack in $\leq P_n$.

From sorted stack to ANY stack in $\leq P_n$?



Reverse the sequences we use to sort.


From ANY stack to sorted stack in $\leq P_n$.

From sorted stack to ANY stack in $\leq P_n$?

Hence,

From ANY stack to ANY stack in $\leq 2P_n$.

From ANY stack to ANY stack in $\leq 2P_n$.

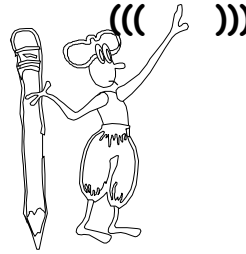

Can you find
a faster way
than $2P_n$ flips
to go from
ANY to
ANY?

Any-to-Any?

S: $4, 3, 5, 1, 2$
1 2 3 4 5 $\xrightarrow{\leq P_n \text{ steps}}$ T: $5, 2, 4, 3, 1$
3 5 1 2 4

From ANY Stack S to ANY stack T in $\leq P_n$

Rename the pancakes in S to be 1,2,3,...n.
Rewrite T using the new naming scheme that
you used for S.

T will be some list: $\pi(1), \pi(2), \dots, \pi(n)$.

The sequence of flips that brings the sorted
stack to $\pi(1), \pi(2), \dots, \pi(n)$ will bring S to T.

S: $4, 3, 5, 1, 2$
1, 2, 3, 4, 5

T: $5, 2, 4, 3, 1$
3, 5, 1, 2, 4

The Known Pancake Numbers



n	P_n
1	0
2	1
3	3
4	4
5	5
6	7
7	8
8	9
9	10
10	11
11	13
12	14
13	15

P_{14} Is Unknown

14! Orderings of 14 pancakes.

14! = 87,178,291,200


Is This Really Computer Science?

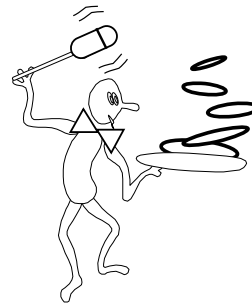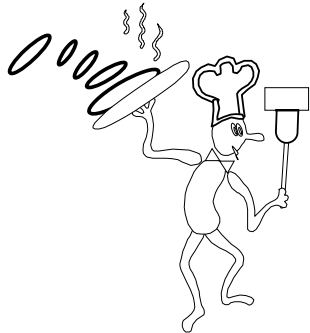

$$n \leq P_n \leq 2n-3$$

Posed in *Amer. Math. Monthly* 82 (1) (1975),
"Harry Dweighter" a.k.a. Jacob Goodman


$$(17/16)n \leq P_n \leq (5n+5)/3$$

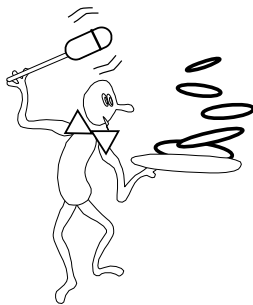

William Gates &
Christos Papadimitriou
Bounds For Sorting By
Prefix Reversal.
Discrete Mathematics,
vol 27, pp 47-57, 1979.



$$(15/14)n \leq P_n \leq (5n+5)/3$$

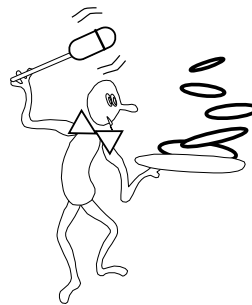

H. Heydari &
H. I. Sudborough
On the Diameter of
the Pancake Network.
Journal of Algorithms,
vol 25, pp 67-94, 1997.

Permutation

Any particular ordering of all n elements of an n element set S , is called a permutation on the set S .

Example: $S = \{1, 2, 3, 4, 5\}$

One possible permutation: $5\ 3\ 2\ 4\ 1$
 $1\ 2\ 3\ 4\ 5$

$5 \cdot 4 \cdot 3 \cdot 2 \cdot 1 = 120$ possible permutations on S

Permutation

Any particular ordering of all n elements of an n element set S , is called a permutation on the set S .

Each different stack of n pancakes is one of the permutations on $[1..n]$.

Representing A Permutation

We have many ways to specify a permutation on S .
Here are two methods:

- 1) We list a sequence of all the elements of $[1..n]$, each one written exactly once.
Ex: 6 4 5 2 1 3
- 2) We give a function π on S such that $\pi(1) \pi(2) \pi(3) \dots \pi(n)$ is a sequence that lists $[1..n]$, each one exactly once.
Ex: $\pi(1)=6 \pi(2)=4 \pi(3)=5 \pi(4)=2 \pi(5)=1 \pi(6)=3$

A Permutation is a NOUN

An ordering S of a stack of pancakes is a permutation.

A Permutation is a NOUN.
A permutation can also be a VERB.


An ordering S of a stack of pancakes is a permutation.

1 3 2
↓
1 2 3

We can permute S to obtain a new stack S' .

Permute also means to rearrange so as to obtain a permutation of the original.

Permute A Permutation.

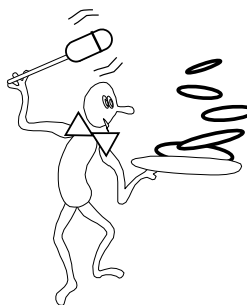

I start with a permutation S of pancakes.
I continue to use a flip operation to permute my current permutation, so as to obtain the sorted permutation.



There are $n! = 1*2*3*4*...*n$ permutations on n elements.

Easy proof in the first counting lecture.

Pancake Network: Definition For $n!$ Nodes

For each node, assign it the name of one of the $n!$ stacks of n pancakes.

Put a wire between two nodes if they are one flip apart.

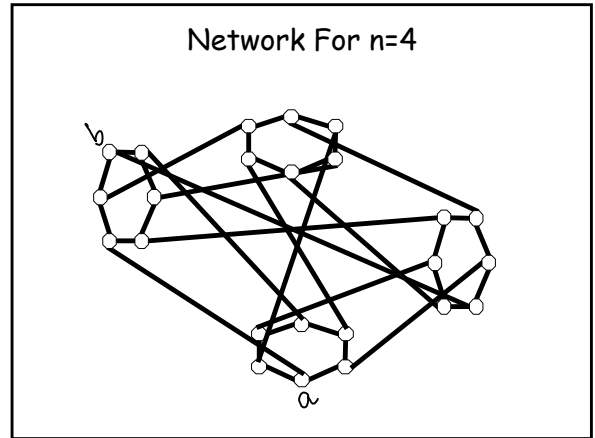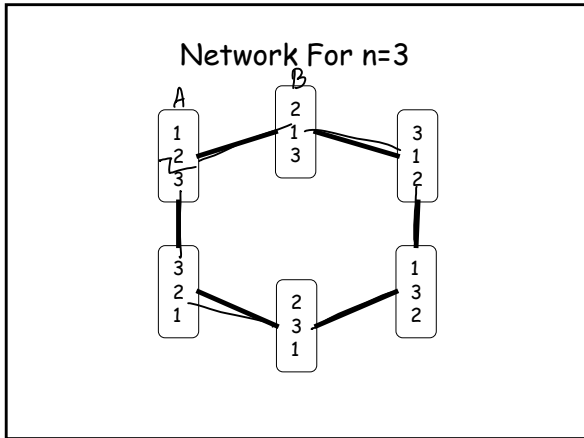

Pancake Network: Message Routing Delay

What is the maximum distance between two nodes in the network?

P_n

Pancake Network: Reliability

If up to $n-2$ nodes get hit by lightning the network remains connected, even though each node is connected to only $n-1$ other nodes.

The Pancake Network is optimally reliable for its number of edges and nodes.

Mutation Distance

Head Cabbage
(*Brassica oleracea capitata*)

© 1997 The Learning Company, Inc.

Turnip
(*Brassica rapa*)

© 1997 The Learning Company, Inc.

A
B
C


A
B
C

High Level Point

Computer Science is not merely about computers and programming, it is about mathematically modeling our world, and about finding better and better ways to solve problems.

This lecture is a microcosm of this exercise.

One "Simple" Problem

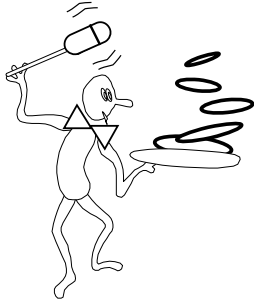

A host of problems and applications at the frontiers of science



Study Bee

Please read the course document carefully.

You must hand in a signed cheating policy page.



Study Bee

Definitions of:
nth pancake number
lower bound
upper bound
permutation

Proof of:
ANY to ANY in $\leq P_n$

Important Technique:
Bracketing

References

Bill Gates & Christos Papadimitriou: Bounds For Sorting By Prefix Reversal. *Discrete Mathematics*, vol 27, pp 47-57, 1979.

H. Heydari & H. I. Sudborough: On the Diameter of the Pancake Network. *Journal of Algorithms*, vol 25, pp 67-94, 1997