Lecture 1

Introduction

- What would you get out of this course?
- Structure of a Compiler
- Optimization Example

What Do Compilers Do?

1. Translate one language into another
   - e.g., convert C++ into x86 object code
   - difficult for "natural" languages, but feasible for computer languages

2. Improve (i.e. "optimize") the code
   - e.g, make the code run 3 times faster
   - driving force behind modern processor design

What Do We Mean By "Optimization"?

- **Informal Definition:**
  - transform a computation to an equivalent but "better" form
    - in what way is it equivalent?
    - in what way is it better?

- **"Optimize" is a bit of a misnomer**
  - the result is not actually optimal

How Can the Compiler Improve Performance?

Execution time = Operation count * Machine cycles per operation

- **Minimize the number of operations**
  - arithmetic operations, memory acesses
- **Replace expensive operations with simpler ones**
  - e.g., replace 4-cycle multiplication with 1-cycle shift
- **Minimize cache misses**
  - both data and instruction accesses
- **Perform work in parallel**
  - instruction scheduling within a thread
  - parallel execution across multiple threads



- **Related issue: minimize object code size**
  - more important on embedded systems

Other Optimization Goals Besides Performance

- Minimizing power and energy consumption
- Finding (and minimizing the impact of) software bugs
  - security vulnerabilities
  - subtle interactions between parallel threads
- Increasing reliability, fault-tolerance

Reasons for Studying Compilers

- **Compilers are important**
  - An essential programming tool
    - Improves software productivity by hiding low-level details
  - A tool for designing and evaluating computer architectures
    - Inspired RISC, VLIW machines
    - Machines' performance measured on compiled code
  - Techniques for developing other programming tools
    - Examples: error detection tools
  - Little languages and program translations can be used to solve other problems
- **Compilers have impact: affect all programs**

What Would You Get Out of This Course?

- Basic knowledge of existing compiler optimizations
- Hands-on experience in constructing optimizations within a fully functional research compiler
- Basic principles and theory for the development of new optimizations

II. Structure of a Compiler

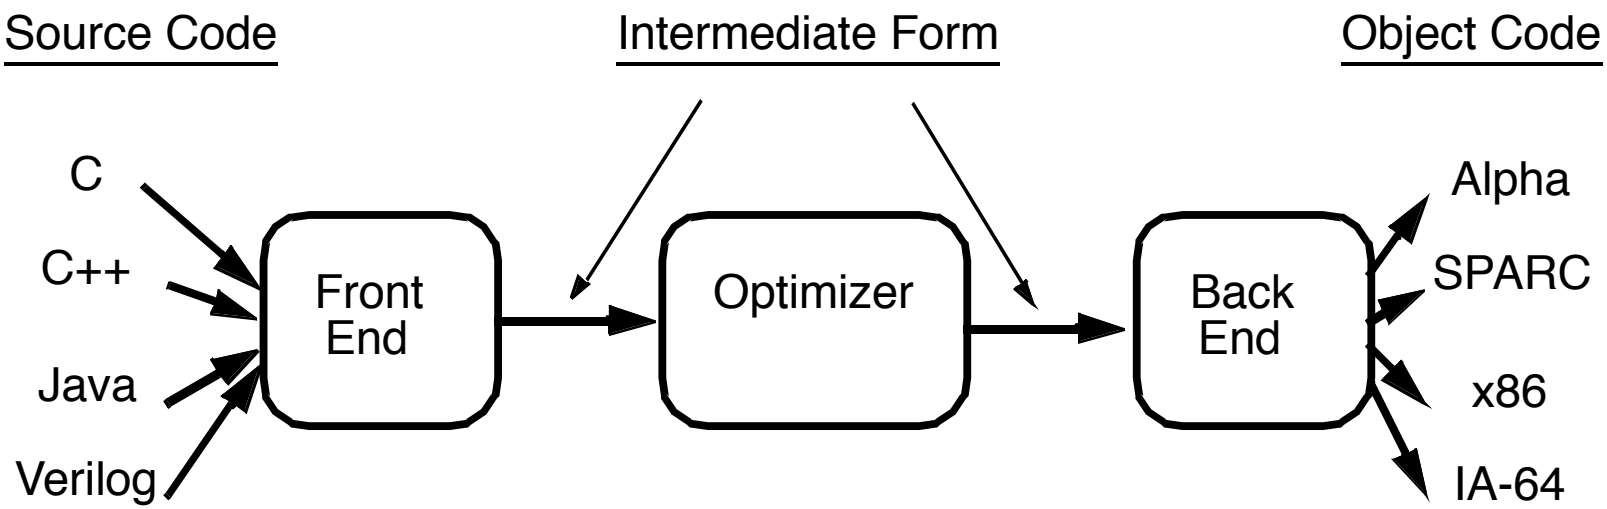

- **Optimizations are performed on an "intermediate form"**
  - similar to a generic RISC instruction set
- **Allows easy portability to multiple source languages, target machines**

Ingredients in a Compiler Optimization

- **Formulate optimization problem**
  - Identify opportunities of optimization
    - applicable across many programs
    - affect key parts of the program (loops/recursions)
    - amenable to "efficient enough" algorithm
- **Representation**
  - Must abstract essential details relevant to optimization

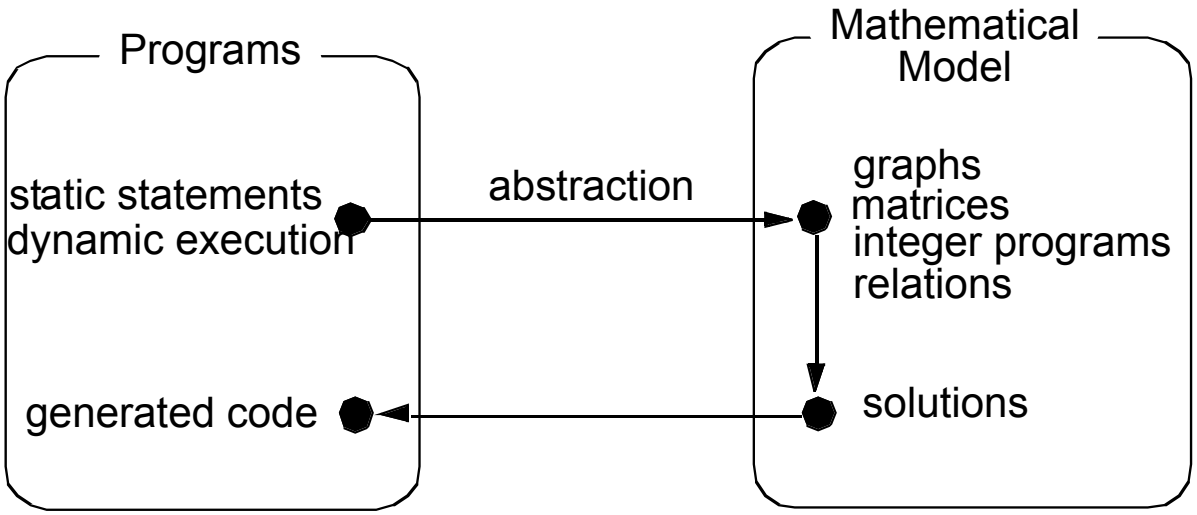

Ingredients in a Compiler Optimization

- **Formulate optimization problem**
  - Identify opportunities of optimization
    - applicable across many programs
    - affect key parts of the program (loops/recursions)
    - amenable to "efficient enough" algorithm
- **Representation**
  - Must abstract essential details relevant to optimization
- **Analysis**
  - Detect when it is desirable and safe to apply transformation
- **Code Transformation**

- **Experimental Evaluation (and repeat process)**

Representation: Instructions

- **Three-address code**

  `A := B op C`

  - LHS: name of variable e.g. `x`, `A[t]` (address of `A` + contents of `t`)
  - RHS: value

- **Typical instructions**

```
A := B op C
A := unaryop B
A := B
GOTO s
IF A relop B GOTO s
CALL    f
RETURN
```

III. Optimization Example

- **Bubblesort program that sorts an array `A` that is allocated in static storage:**
  - an element of `A` requires four bytes of a byte-addressed machine
  - elements of `A` are numbered 1 through `n` (`n` is a variable)
  - `A[j]` is in location `&A+4*(j-1)`

```
FOR i := n-1 DOWNTO 1 DO
   FOR j := 1 TO i DO
      IF A[j]> A[j+1] THEN BEGIN
         temp := A[j];
         A[j] := A[j+1];
         A[j+1] := temp
      END
```

Translated Code

```
     i := n-1
S5:  if i<1 goto s1
     j := 1
s4:  if j>i goto s2
     t1 := j-1
     t2 := 4*t1
     t3 := A[t2]    ;A[j]
     t4 := j+1
     t5 := t4-1
     t6 := 4*t5
     t7 := A[t6]    ;A[j+1]
     if t3<=t7 goto s3
```

```
     t8 :=j-1
     t9 := 4*t8
     temp := A[t9]   ;A[j]
     t10 := j+1
     t11:= t10-1
     t12 := 4*t11
     t13 := A[t12]   ;A[j+1]
     t14 := j-1
     t15 := 4*t14
     A[t15] := t13 ;A[j]:=A[j+1]
     t16 := j+1
     t17 := t16-1
     t18 := 4*t17
     A[t18]:=temp   ;A[j+1]:=temp
s3:  j := j+1
     goto S4
S2:  i := i-1
     goto s5
s1:
```

Representation: a Basic Block

- **Basic block = a sequence of 3-address statements**
  - only the first statement can be reached from outside the block (no branches into middle of block)
  - all the statements are executed consecutively if the first one is (no branches out or halts except perhaps at end of block)

- **We require basic blocks to be *maximal***
  - they cannot be made larger without violating the conditions

- **Optimizations within a basic block are *local* optimizations**

Flow Graphs

- **Nodes: basic blocks**

- **Edges: B_i -> B_j, iff B_j can follow B_i immediately in *some* execution**
  - Either first instruction of B_j is target of a goto at end of B_i
  - Or, B_j physically follows B_i, which does not end in an unconditional goto.

- **The block led by first statement of the program is the *start*, or *entry* node.**

Find the Basic Blocks

```
     i := n-1
S5:  if i<1 goto s1
     j := 1
s4:  if j>i goto s2
     t1 := j-1
     t2 := 4*t1
     t3 := A[t2]    ;A[j]
     t4 := j+1
     t5 := t4-1
     t6 := 4*t5
     t7 := A[t6]    ;A[j+1]
     if t3<=t7 goto s3
```

```
     t8 :=j-1
     t9 := 4*t8
     temp := A[t9]   ;A[j]
     t10 := j+1
     t11:= t10-1
     t12 := 4*t11
     t13 := A[t12]   ;A[j+1]
     t14 := j-1
     t15 := 4*t14
     A[t15] := t13 ;A[j]:=A[j+1]
     t16 := j+1
     t17 := t16-1
     t18 := 4*t17
     A[t18]:=temp   ;A[j+1]:=temp
s3:  j := j+1
     goto S4
S2:  i := i-1
     goto s5
s1:
```

Basic Blocks from Example

in

B1
```
i := n-1
```

B2
```
if i<1 goto out
```
→ out

B3
```
j := 1
```

B4
```
if j>i goto B5
```

B5
```
i := i-1
goto B2
```

B6
```
t1 := j-1
...
if t3<=t7 goto B8
```

B7
```
t8 :=j-1
...
A[t18]=temp
```

B8
```
j := j+1
goto B4
```

Sources of Optimizations

- **Algorithm optimization**

- **Algebraic optimization**

```
A := B+0      =>      A := B
```

- **Local optimizations**
  - within a basic block -- across instructions
- **Global optimizations**
  - within a flow graph -- across basic blocks
- **Interprocedural analysis**
  - within a program -- across procedures (flow graphs)

Local Optimizations

- **Analysis & transformation performed within a basic block**
- **No control flow information is considered**
- **Examples of local optimizations:**
  - local common subexpression elimination
    analysis: same expression evaluated more than once in b.
    transformation: replace with single calculation
  - local constant folding or elimination
    analysis: expression can be evaluated at compile time
    transformation: replace by constant, compile-time value
  - dead code elimination

Example

```
     i := n-1
S5:  if i<1 goto s1
     j := 1
s4:  if j>i goto s2
     t1 := j-1
     t2 := 4*t1
     t3 := A[t2]    ;A[j]
     t4 := j+1
     t5 := t4-1
     t6 := 4*t5
     t7 := A[t6]    ;A[j+1]
     if t3<=t7 goto s3
```

```
     t8 :=j-1
     t9 := 4*t8
     temp := A[t9]   ;A[j]
     t10 := j+1
     t11:= t10-1
     t12 := 4*t11
     t13 := A[t12]   ;A[j+1]
     t14 := j-1
     t15 := 4*t14
     A[t15] := t13 ;A[j]:=A[j+1]
     t16 := j+1
     t17 := t16-1
     t18 := 4*t17
     A[t18]:=temp   ;A[j+1]:=temp
s3:  j := j+1
     goto S4
S2:  i := i-1
     goto s5
s1:
```

Example

```
B1: i := n-1
B2: if i<1 goto out
B3: j := 1
B4: if j>i goto B5
B6: t1 := j-1
    t2 := 4*t1
    t3 := A[t2]      ;A[j]
    t6 := 4*j
    t7 := A[t6]     ;A[j+1]
    if t3<=t7 goto B8
```

```
B7: t8 :=j-1
    t9 := 4*t8
    temp := A[t9]   ;temp:=A[j]
    t12 := 4*j
    t13 := A[t12]   ;A[j+1]
    A[t9]:= t13     ;A[j]:=A[j+1]
    A[t12]:=temp    ;A[j+1]:=temp
B8: j := j+1
    goto B4
B5: i := i-1
    goto B2
out:
```

(Intraprocedural) Global Optimizations

- **Global versions of local optimizations**
  - global common subexpression elimination
  - global constant propagation
  - dead code elimination
- **Loop optimizations**
  - reduce code to be executed in each iteration
  - code motion
  - induction variable elimination
- **Other control structures**
  - Code hoisting: eliminates copies of identical code on parallel paths in a flow graph to reduce code size.

Example

```
B1: i := n-1
B2: if i<1 goto out
B3: j := 1
B4: if j>i goto B5
B6: t1 := j-1
    t2 := 4*t1
    t3 := A[t2]      ;A[j]
    t6 := 4*j
    t7 := A[t6]     ;A[j+1]
    if t3<=t7 goto B8
```

```
B7: t8 :=j-1
    t9 := 4*t8
    temp := A[t9] ;temp:=A[j]
    t12 := 4*j
    t13 := A[t12] ;A[j+1]
    A[t9]:= t13   ;A[j]:=A[j+1]
    A[t12]:=temp  ;A[j+1]:=temp
B8: j := j+1
    goto B4
B5: i := i-1
    goto B2
out:
```

Example (After Global CSE)

```
B1: i := n-1
B2: if i<1 goto out
B3: j := 1
B4: if j>i goto B5
B6: t1 := j-1
    t2 := 4*t1
    t3 := A[t2]      ;A[j]
    t6 := 4*j
    t7 := A[t6]     ;A[j+1]
    if t3<=t7 goto B8
B7: A[t2] := t7
    A[t6] := t4
B8: j := j+1
    goto B4
B5: i := i-1
    goto B2
out:
```

Induction Variable Elimination

- **Intuitively**
  - Loop indices are induction variables (counting iterations)
  - Linear functions of the loop indices are also induction variables (for accessing arrays)

- **Analysis: detection of induction variable**

- **Optimizations**
  - strength reduction: replace multiplication by additions
  - elimination of loop index: replace termination by tests on other induction variables

Example (After IV Elimination)

```
B1:  i := n-1
B2:  if i<1 goto out
B3:  t2 := 0
     t6 := 4
B4:  t19 := 4*I
     if t6>t19 goto B5
B6:  t3 := A[t2]
     t7 := A[t6]   ;A[j+1]
     if t3<=t7 goto B8
B7:  A[t2] := t7
     A[t6] := t3
B8:  t2 := t2+4
     t6 := t6+4
     goto B4
B5:  i := i-1
     goto B2
out:
```

Loop Invariant Code Motion

- **Analysis**
  - a computation is done within a loop and
  - result of the computation is the same as long as we keep going around the loop

- **Transformation**
  - move the computation outside the loop

Machine Dependent Optimizations

- Register allocation
- Instruction scheduling
- Memory hierarchy optimizations
- etc.