

15-780: Graduate Artificial Intelligence

Decision trees

Graphical models

- So far we discussed models that capture joint probability distributions
- These have many uses, and can also be used to determine binary values for variables
 - For example, did a burglary occur?
- However, they also require us to make many assumptions and to fit many parameters:
 - model structure
 - probability model
 - model parameters

Classification

- In many cases we are only interested in one specific variable.
- Examples:
 - Does the robot have to turn? Slow down?
 - What digit is in each of the squares?
 - Does the patient have cancer?

8	4	7	6	7	3	4	1	1	6
0	5	4	7	1	0	5	5	0	4
7	3	5	3	2	4	6	3	0	5
7	8	0	7	8	7	9	8	2	2
6	7	2	8	2	0	4	5	3	7
8	5	7	9	1	0	2	8	8	9
1	2	2	5	6	3	9	6	3	1
8	7	5	5	1	1	2	3	0	8
6	3	8	5	3	2	8	6	7	3
9	7	6	3	6	9	2	4	4	5

Generative vs. discriminative models

- Graphical models can be used for classification
 - They represent a subset of classifiers known as 'generative models'
- But we can also design classifiers that are more specific to a given task and do not require an estimation of joint probabilities
 - These are often referred to as discriminative models
- Examples:
 - Support vector machines (SVM)
 - Decision trees

Decision trees


- One of the most intuitive classifiers
- Easy to understand and construct
- Surprisingly, also works very (very) well*

Lets build a decision tree!

* More on this towards the end of this lecture

Structure of a decision tree

- Internal nodes correspond to attributes (features)
- Leafs correspond to classification outcome
- edges denote assignment

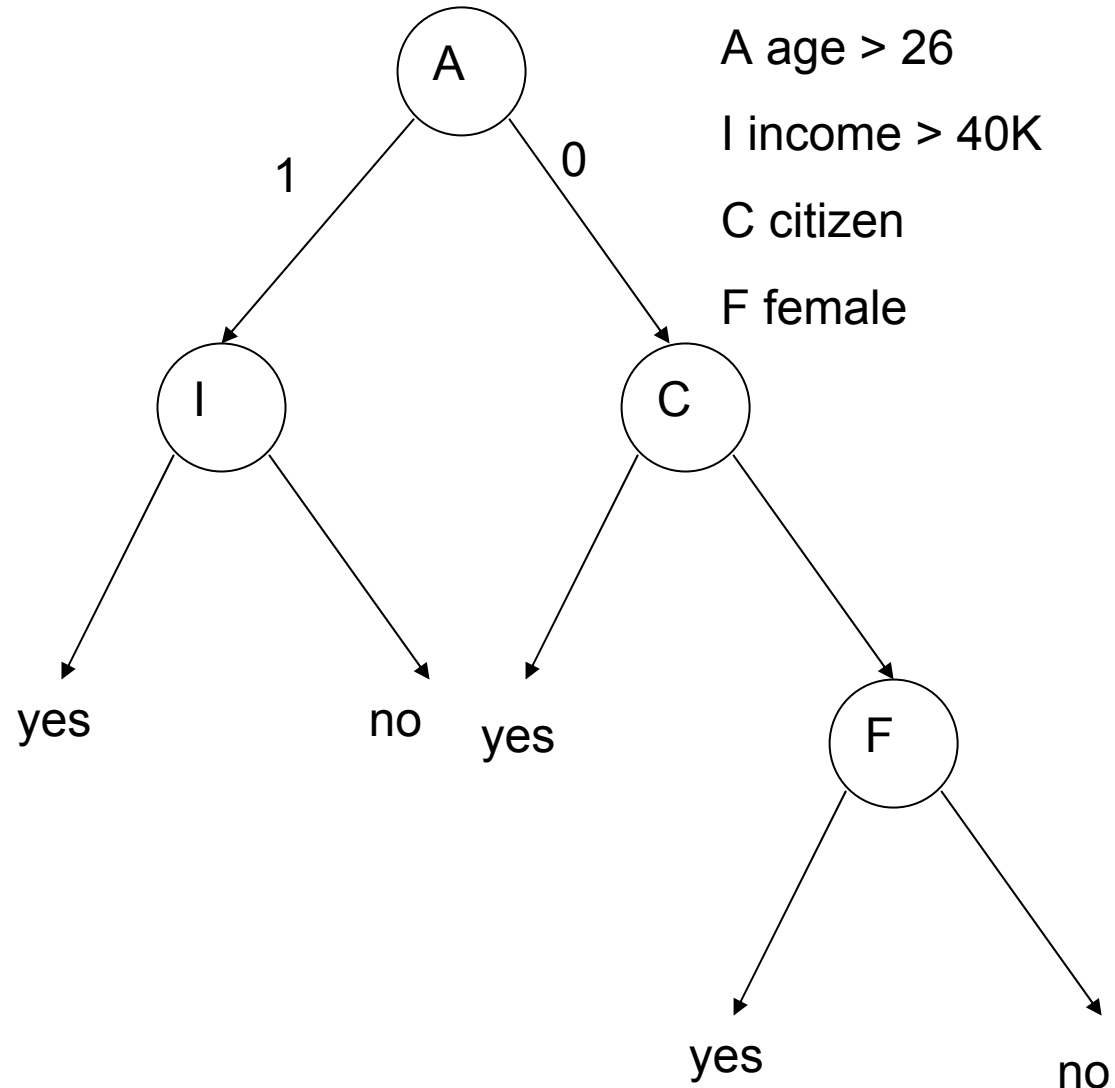

Netflix

File Edit View Favorites Tools Help


Back Forward Stop Home Search Favorites Media

Address <http://www.sfgate.com/cgi-bin/article.cgi?f=/n/a/2006/10/01/financial/f210530D02.DTL> Go Links

netscape webmail Search Web Upgrade Now! Mail My Yahoo! Answers Fantasy Sports Hockey Music Personals

Google nize! Go Bookmarks 5 blocked Check AutoLink AutoFill Send to netflix million prize Settings

Unlimited DVD's Delivered
FREE In-Store Rentals



Starting at only \$9.99 per month
2 WEEKS FREE! GO

SFGate.com

SFGATE HOME BUSINESS SPORTS ENTERTAINMENT TRAVEL JOBS REAL ESTATE CARS

Search SFGate News Web by Google

AP Breaking News

Netflix offers \$1 million prize for better movie recommendations

By MICHAEL LIEDTKE, AP Business Writer
Sunday, October 1, 2006

(10-01) 21:05 PDT San Francisco (AP) --

* [Printable Version](#)
* [Email This Article](#)

Online DVD rental pioneer Netflix Inc. wants recommendations on how to improve its movie-recommendation system so badly that it's dangling a \$1 million reward as an incentive.

The prize, offered in a contest scheduled to begin Monday, is part of Netflix's effort to sharpen its competitive edge as it continues a bitter duel with Blockbuster Inc. and prepares for an anticipated onslaught of services that make it easier to download movies on to computer hard drives.

Business & Finance

Get Quote:

Detailed

[Symbol Lookup](#)

COMMISSION ON THE REGULATION OF U.S. CAPITAL MARKETS IN THE 21ST CENTURY

Examining the Competitive Environment in the Global Marketplace:
A Town Hall Meeting


THURSDAY, OCTOBER 12
The City Club of San Francisco

REGISTER TODAY

ChronicleJobs TOP JOBS

- NURSING
Clinical Application
- PLANNING
MTC Metropolitan

HAPPENING SAN FRANCISCO



Error on page. Internet

Building a decision tree

```
Function BuildTree(n,A) // n: samples (rows), A: attributes
  If empty(A) or all n(L) are the same
    status = leaf
    class = most common class in n(L)
  else
    status = internal
    a ← bestAttribute(n,A)
    LeftNode = BuildTree(n(a=1), A \ {a})
    RightNode = BuildTree(n(a=0), A \ {a})
  end
end
```


Building a decision tree

Function BuildTree(n,A) // n: samples (rows), A: attributes

If empty(A) or all n(L) are the same

status = leaf

class = most common class in n(L)

else

status = internal

a \leftarrow bestAttribute(n,A)

LeftNode = BuildTree(n(a=1), A \ {a})

RightNode = BuildTree(n(a=0), A \ {a})

end

end

n(L): Labels for samples in this set

We will discuss this function next

Recursive calls to create left and right subtrees, n(a=1) is the set of samples in n for which the attribute a is 1


Identifying 'bestAttribute'

- There are many possible ways to select the best attribute for a given set.
- We will discuss one possible way which is based on information theory and generalizes well to non binary variables

Entropy

- Quantifies the amount of uncertainty associated with a specific probability distribution
- The higher the entropy, the less confident we are in the outcome
- Definition

$$H(X) = \sum_c - p(X = c) \log_2 p(X = c)$$

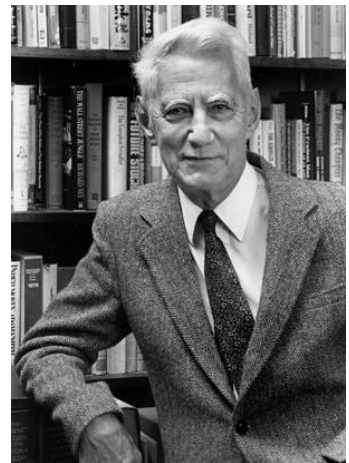

Claude Shannon (1916 – 2001), most of the work was done in Bell labs

Entropy

- Definition


$$H(X) = \sum_i -p(X=i) \log_2 p(X=i)$$

- So, if $P(X=1) = 1$ then

$$\begin{aligned} H(X) &= -p(x=1) \log_2 p(X=1) - p(x=0) \log_2 p(X=0) \\ &= -1 \log 1 - 0 \log 0 = 0 \end{aligned}$$

- If $P(X=1) = .5$ then

$$\begin{aligned} H(X) &= -p(x=1) \log_2 p(X=1) - p(x=0) \log_2 p(X=0) \\ &= -.5 \log_2 .5 - .5 \log_2 .5 = -\log_2 .5 = 1 \end{aligned}$$

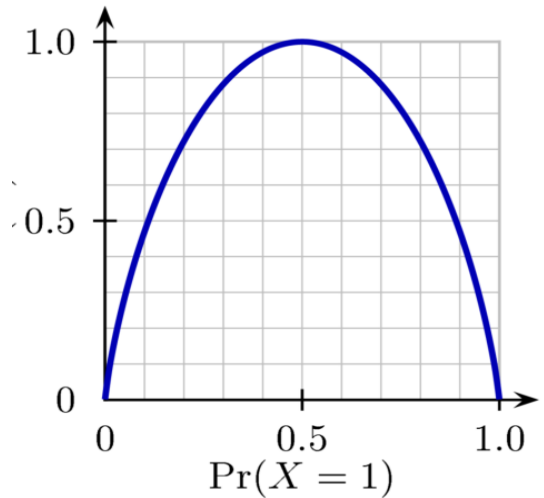

Interpreting entropy

- Entropy can be interpreted from an information standpoint
- Assume both sender and receiver know the distribution. How many bits, on average, would it take to transmit one values?
- If $P(X=1) = 1$ then the answer is 0 (we don't need to transmit anything)
- If $P(X=1) = .5$ then the answer is 1 (either values is equally likely)
- If $0 < P(X=1) < .5$ or $0.5 < P(X=1) < 1$ then the answer is between 0 and 1
 - Why?

Expected bits per symbol

- Assume $P(X=1) = 0.8$
- Then $P(11) = 0.64$, $P(10)=P(01)=.16$ and $P(00)=.04$
- Lets define the following code
 - For 11 we send 0
 - For 10 we send 01
 - For 01 we send 011
 - For 00 we send 0111

Expected bits per symbol

- Assume $P(X=1) = 0.8$
- Then $P(11) = 0.64$, $P(10)=P(01)=.16$ and $P(00)=.04$
- Lets define the following code
 - For 11 we send 0 so: 010011011100011011101
 - For 10 we send 01 can be broken to: 01 0 011 011 0 0 011 0111 01
 - For 01 we send 011 which is: 10 11 01 11 11 01 00 01
 - For 00 we send 0111
- What is the expected bits / symbol?
 $(.64*1+.16*2+.16*3+.04*4)/2 = 0.8$
- Entropy (lower bound) $H(X)=0.7219$

Conditional entropy

Movie length	Liked?
Short	Yes
Short	No
Medium	Yes
long	No
Long	No
Medium	Yes
Short	Yes
Long	Yes
Medium	Yes

- Entropy measures the uncertainty in a specific distribution
- What if both sender and receiver know something about the transmission?
- For example, say I want send the label (liked) when the length is known
- This becomes a conditional entropy problem: $H(L_i | L_e=v)$

Is the entropy of Liked among movies with length v

Conditional entropy: Examples for specific values

Movie length	Liked?
Short	Yes
Short	No
Medium	Yes
long	No
Long	No
Medium	Yes
Short	Yes
Long	Yes
Medium	Yes

Lets compute $H(L_i | L_e=v)$

1. $H(L_i | L_e = S) = .92$

2. $H(L_i | L_e = M) = 0$

3. $H(L_i | L_e = L) = .92$

Conditional entropy

Movie length	Liked?
Short	Yes
Short	No
Medium	Yes
long	No
Long	No
Medium	Yes
Short	Yes
Long	Yes
Medium	Yes

- We can generalize the conditional entropy idea to determine $H(L_i | L_e)$
- That is, what is the expected number of bits we need to transmit if both sides know the value of L_e for each of the records (samples)
- Definition:
$$H(X | Y) = \sum_i P(Y = i) H(X | Y = i)$$

We explained how to compute this in the previous slides

Conditional entropy: Example

$$H(X | Y) = \sum_i P(Y = i) H(X | Y = i)$$

Movie length	Liked?
Short	Yes
Short	No
Medium	Yes
long	No
Long	No
Medium	Yes
Short	Yes
Long	Yes
Medium	Yes

- Lets compute $H(L_i | L_e)$

$$\begin{aligned}
 H(L_i | L_e) &= H(L_e = S) H(L_i | L_e=S) + \\
 &\quad H(L_e = M) H(L_i | L_e=M) + \\
 &\quad H(L_e = L) H(L_i | L_e=L) = \\
 &= 1/3 * .92 + 1/3 * 0 + 1/3 * .92 = \\
 &= 0.61
 \end{aligned}$$

we already computed:

$$H(L_i | L_e = S) = .92$$

$$H(L_i | L_e = M) = 0$$

$$H(L_i | L_e = L) = .92$$

Information gain

- How much do we gain (in terms of reduction in entropy) from knowing one of the attributes
- In other words, what is the reduction in entropy from this knowledge
- Definition: $IG(X|Y)^* = H(X) - H(X|Y)$

* $IG(X|Y)$ is always ≥ 0

Proof: Jensen inequality

Where we are

- We were looking for a good criteria for selecting the best attribute for a node split
- We defined the entropy, conditional entropy and information gain
- We will now use information gain as our criteria for a good split
- That is, BestAttribute will return the attribute that maximizes the information gain at each node

Example: Root attribute

$$P(Li=yes) = 2/3$$

$$H(Li) = .91$$

$$H(Li | T) =$$

$$H(Li | Le) =$$

$$H(Li | D) =$$

$$H(Li | F) =$$

Movie	Type	Length	Director	Famous actors	Liked ?
m1	Comedy	Short	Adamson	No	Yes
m2	Animated	Short	Lasseter	No	No
m3	Drama	Medium	Reiner	No	Yes
m4	animated	long	Adamson	Yes	No
m5	Comedy	Long	Lasseter	Yes	No
m6	Thriller	Medium	Singer	Yes	Yes
M7	animated	Short	Singer	No	Yes
m8	Comedy	Long	Marshall	Yes	Yes
m9	Drama	Medium	Linklater	No	Yes

Example: Root attribute

$$P(Li=yes) = 2/3$$

$$H(Li) = .91$$

$$H(Li | T) = 0.61$$

$$H(Li | Le) = 0.61$$

$$H(Li | D) = 0.36$$

$$H(Li | F) = 0.85$$

Movie	Type	Length	Director	Famous actors	Liked ?
m1	Comedy	Short	Adamson	No	Yes
m2	Animated	Short	Lasseter	No	No
m3	Drama	Medium	Adamson	No	Yes
m4	animated	long	Lasseter	Yes	No
m5	Comedy	Long	Lasseter	Yes	No
m6	Drama	Medium	Singer	Yes	Yes
M7	animated	Short	Singer	No	Yes
m8	Comedy	Long	Adamson	Yes	Yes
m9	Drama	Medium	Lasseter	No	Yes

Example: Root attribute

$$P(Li=yes) = 2/3$$

$$H(Li) = .91$$

$$H(Li | T) = 0.61$$

$$H(Li | Le) = 0.61$$

$$H(Li | D) = 0.36$$

$$H(Li | F) = 0.85$$

$$IG(Li | T) = .91 - .61 = 0.3$$

$$IG(Li | Le) = .91 - .61 = 0.3$$

$$IG(Li | D) = .91 - .36 = 0.55$$

$$IG(Li | F) = .91 - .85 = 0.06$$

Movie	Type	Length	Director	Famous actors	Liked ?
m1	Comedy	Short	Adamson	No	Yes
m2	Animated	Short	Lasseter	No	No
m3	Drama	Medium	Adamson	No	Yes
m4	animated	long	Lasseter	Yes	No
m5	Comedy	Long	Lasseter	Yes	No
m6	Drama	Medium	Singer	Yes	Yes
M7	animated	Short	Singer	No	Yes
m8	Comedy	Long	Adamson	Yes	Yes
m9	Drama	Medium	Lasseter	No	Yes

Example: Root attribute

$$P(Li=yes) = 2/3$$

$$H(Li) = .91$$

$$H(Li | T) = 0.61$$

$$H(Li | Le) = 0.61$$

$$H(Li | D) = 0.36$$

$$H(Li | F) = 0.85$$

$$IG(Li | T) = .91 - .61 = 0.3$$


$$IG(Li | Le) = .91 - .61 = 0.3$$

$$IG(Li | D) = .91 - .36 = 0.55$$

$$IG(Li | F) = .91 - .85 = 0.06$$


Movie	Type	Length	Director	Famous actors	Liked ?
m1	Comedy	Short	Adamson	No	Yes
m2	Animated	Short	Lasseter	No	No
m3	Drama	Medium	Adamson	No	Yes
m4	animated	long	Lasseter	Yes	No
m5	Comedy	Long	Lasseter	Yes	No
m6	Drama	Medium	Singer	Yes	Yes
M7	animated	Short	Singer	No	Yes
m8	Comedy	Long	Adamson	Yes	Yes
m9	Drama	Medium	Lasseter	No	Yes

Building a tree

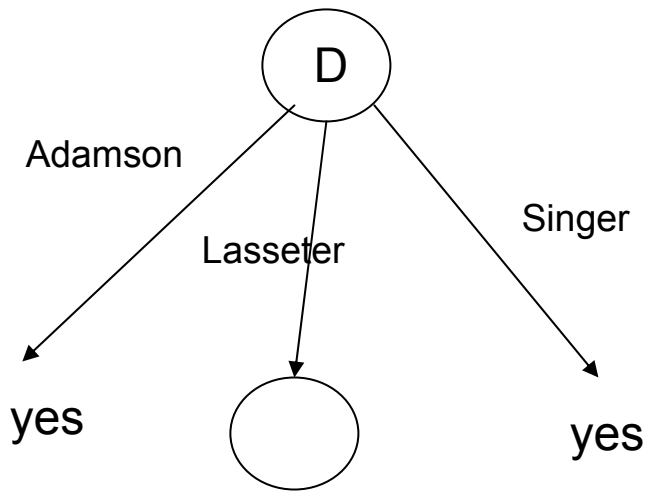

Movie	Type	Length	Director	Famous actors	Liked ?
m1	Comedy	Short	Adamson	No	Yes
m2	Animated	Short	Lasseter	No	No
m3	Drama	Medium	Adamson	No	Yes
m4	animated	long	Lasseter	Yes	No
m5	Comedy	Long	Lasseter	Yes	No
m6	Drama	Medium	Singer	Yes	Yes
M7	animated	Short	Singer	No	Yes
m8	Comedy	Long	Adamson	Yes	Yes
m9	Drama	Medium	Lasseter	No	Yes

Building a tree

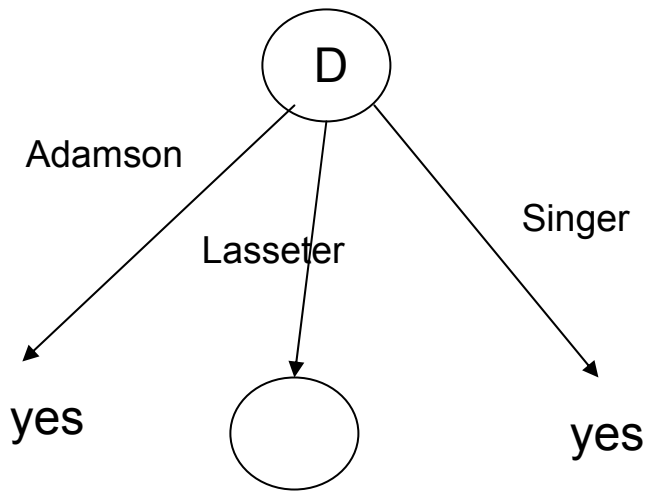


Movie	Type	Length	Director	Famous actors	Liked ?
m2	Animated	Short	Lasseter	No	No
m4	animated	long	Lasseter	Yes	No
m5	Comedy	Long	Lasseter	Yes	No
m9	Drama	Medium	Lasseter	No	Yes

We only need to focus on the records (samples) associated with this node

Building a tree

We eliminated the 'director' attribute. All samples have the same director

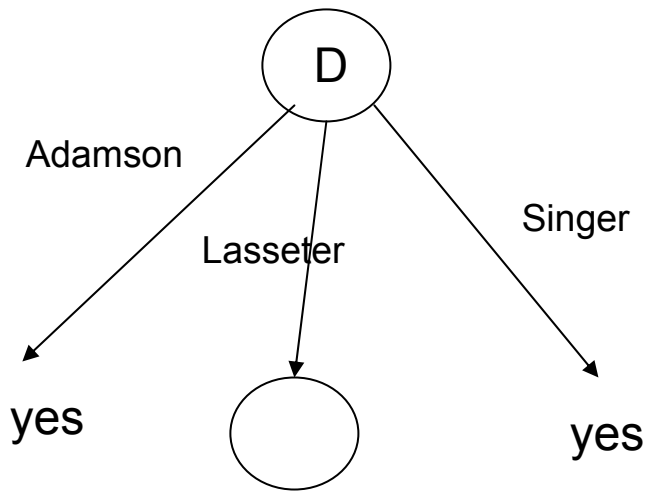

Movie	Type	Length	Famous actors	Liked ?
m2	Animated	Short	No	No
m4	animated	long	Yes	No
m5	Comedy	Long	Yes	No
m9	Drama	Medium	No	Yes


$$P(Li=yes) = 1/4 \quad H(Li) = .81$$

$$H(Li | T) = 0$$

$$H(Li | Le) = 0$$

$$H(Li | F) = 0.5$$

Building a tree

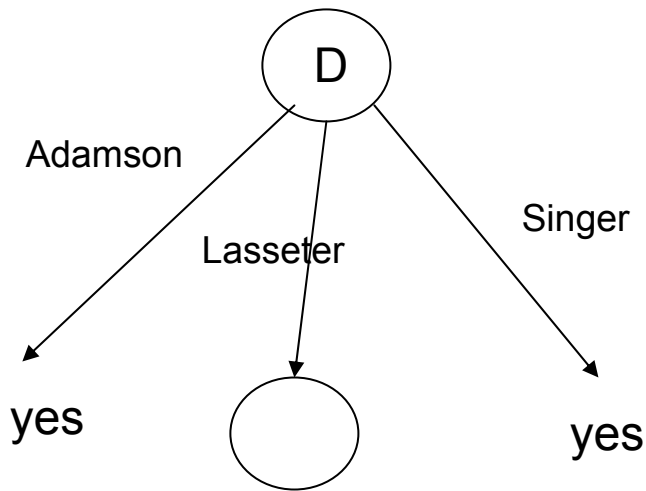

Movie	Type	Length	Famous actors	Liked ?
m2	Animated	Short	No	No
m4	animated	long	Yes	No
m5	Comedy	Long	Yes	No
m9	Drama	Medium	No	Yes


$$P(Li=yes) = 1/4 \quad H(Li) = .81$$

$$H(Li | T) = 0 \quad \boxed{IG(Li | T) = 0.81}$$

$$H(Li | Le) = 0 \quad IG(Li | Le) = 0.81$$


$$H(Li | F) = 0.5 \quad IG(Li | F) = .31$$

Building a tree

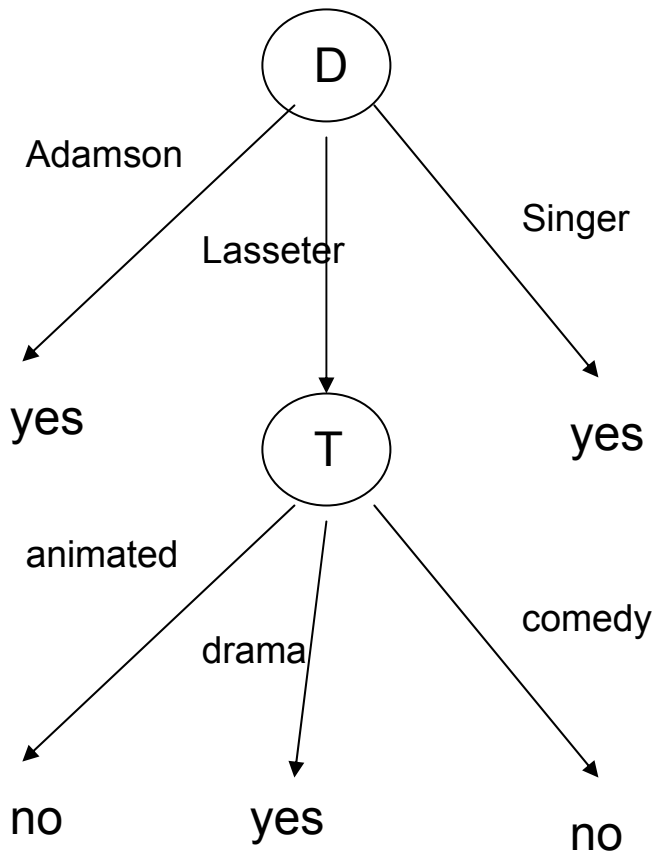

Movie	Type	Length	Famous actors	Liked ?
m2	Animated	Short	No	No
m4	animated	long	Yes	No
m5	Comedy	Long	Yes	No
m9	Drama	Medium	No	Yes

Final tree

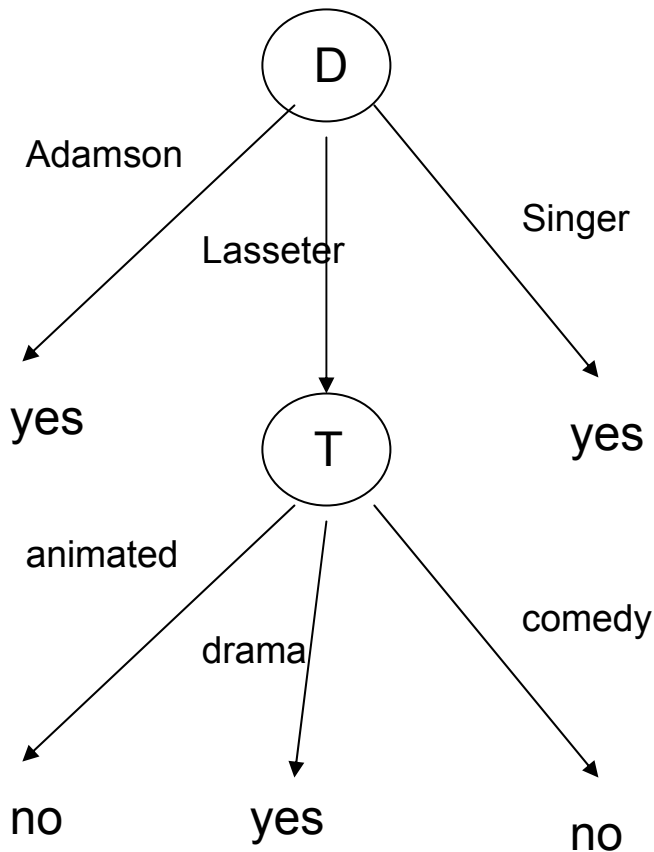

Movie	Type	Length	Director	Famous actors	Liked ?
m1	Comedy	Short	Adamson	No	Yes
m2	Animated	Short	Lasseter	No	No
m3	Drama	Medium	Adamson	No	Yes
m4	animated	long	Lasseter	Yes	No
m5	Comedy	Long	Lasseter	Yes	No
m6	Drama	Medium	Singer	Yes	Yes
M7	animated	Short	Singer	No	Yes
m8	Comedy	Long	Adamson	Yes	Yes
m9	Drama	Medium	Lasseter	No	Yes

Additional points

- The algorithm we gave reaches homogenous nodes (or runs out of attributes)
- This is dangerous: For datasets with many (non relevant) attributes the algorithm will continue to split nodes
- **This will lead to overfitting!**

Avoiding overfitting: Tree pruning

- Split data into train and test set
- Build tree using training set
 - For all internal nodes (starting at the root)
 - remove sub tree rooted at node
 - assign class to be the most common among training set
 - check test data error
 - if error is lower, keep change
 - otherwise restore subtree, repeat for all nodes in subtree

Continuous values

- Either use threshold to turn into binary or discretize
- Its possible to compute information gain for all possible tresholds (there are a finite number of training samples)
- Harder if we wish to assign more than two values (can be done recursively)

The 'best' classifier

- There has been a lot of interest lately in decision trees.
- They are quite robust, intuitive and, surprisingly, very accurate