

Exceptional Control Flow: Signals

15-213: Introduction to Computer Systems
14th Lecture, Jun 24, 2015

Instructors:

nwf and Greg Kesden

ECF Exists at All Levels of a System

■ Exceptions

- Hardware and operating system kernel software

■ Process Context Switch

- Hardware timer and kernel software

■ Signals

- Kernel software and application software

■ Nonlocal jumps

- Application code

} Previous Lecture


} This Lecture

} Textbook and
supplemental slides

Today

- Shells
- Signals

Unix Process Hierarchy

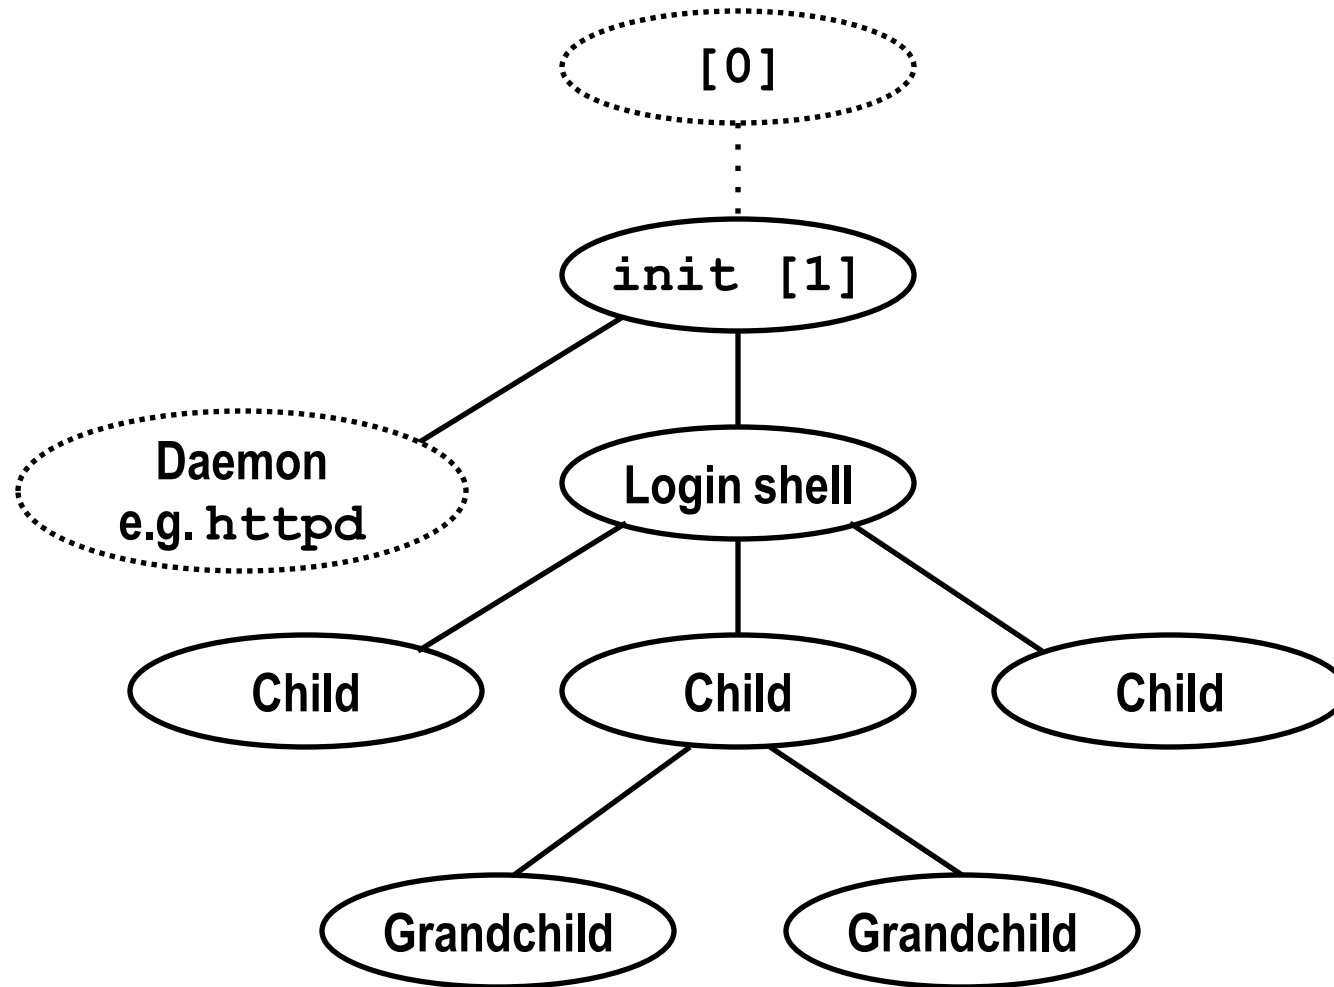

Shell Programs

- A *shell* is an application program that runs programs on behalf of the user.

- **sh** Original Unix shell (Stephen Bourne, AT&T Bell Labs, 1977)
- **csh** BSD Unix C shell (**tcsh**: enhanced **csh** at CMU and elsewhere)
- **bash** "Bourne-Again" Shell

```
int main() {
    char cmdline[MAXLINE];

    while (1) {
        /* read */
        printf("> ");
        Fgets(cmdline, MAXLINE, stdin);
        if (feof(stdin))
            exit(0);

        /* evaluate */
        eval(cmdline);
    }
}
```

Execution is a sequence of read/evaluate steps

Simple Shell eval Function

```
void eval(char *cmdline) {
    char *argv[MAXARGS]; /* argv for execve() */
    int bg;               /* should the job run in bg or fg? */
    pid_t pid;           /* process id */

    bg = parseline(cmdline, argv);
    if (!builtin_command(argv)) {
        if ((pid = Fork()) == 0) { /* child runs user job */
            if (execve(argv[0], argv, environ) < 0) {
                printf("%s: Command not found.\n", argv[0]);
                exit(0);
            }
        }
    }

    if (!bg) { /* parent waits for fg job to terminate */
        int status;
        if (waitpid(pid, &status, 0) < 0)
            unix_error("waitfg: waitpid error");
    }
    else /* otherwise, don't wait for bg job */
        printf("%d %s", pid, cmdline);
}
}
```

Problem with Simple Shell Example

- **Our example shell correctly waits for and reaps foreground jobs**
- **But what about background jobs?**
 - Will become zombies when they terminate
 - Will never be reaped because shell (typically) will not terminate
 - Will create a memory leak that could run the system out of memory

ECF to the Rescue!

■ Solution: Exceptional control flow

- The kernel will interrupt regular processing to alert us when a background process completes
- In Unix, the alert mechanism is called a *signal*

Today

- Shells
- **Signals**

Signals

- A ***signal*** is a small message that notifies a process that an event of some type has occurred in the system
 - akin to exceptions and interrupts
 - sent from the kernel (sometimes by request of another process) to a process
 - signal type is identified by small integer ID's (typically 1-30)
 - only information in a signal is its ID and the fact that it arrived
 - (Well, new world more complicated!)


<i>ID</i>	<i>Name</i>	<i>Default Action</i>	<i>Corresponding Event</i>
2	SIGINT	Terminate	Interrupt (e.g., ctrl-c from keyboard)
9	SIGKILL	Terminate	Kill program (cannot override or ignore)
11	SIGSEGV	Terminate & Dump	Segmentation violation
14	SIGALRM	Terminate	Timer signal
17	SIGCHLD	Ignore	Child stopped or terminated

Signal Concepts: Sending a Signal

- Kernel *sends* (delivers) a signal to a *destination process* by updating some state in the context of the destination process
- Kernel sends a signal for one of the following reasons:
 - Kernel has detected a system event such as divide-by-zero (SIGFPE) or the termination of a child process (SIGCHLD)
 - Another process has invoked the `kill` system call to explicitly request the kernel to send a signal to the destination process

Signal Concepts: Receiving a Signal

- A destination process *receives* a signal when it is forced by the kernel to react in some way to the delivery of the signal
- Some possible ways to react:
 - *Ignore* the signal (do nothing)
 - *Terminate* the process (with optional core dump)
 - *Catch* the signal by executing a user-level function called *signal handler*
 - Akin to a hardware exception handler being called in response to an asynchronous interrupt:

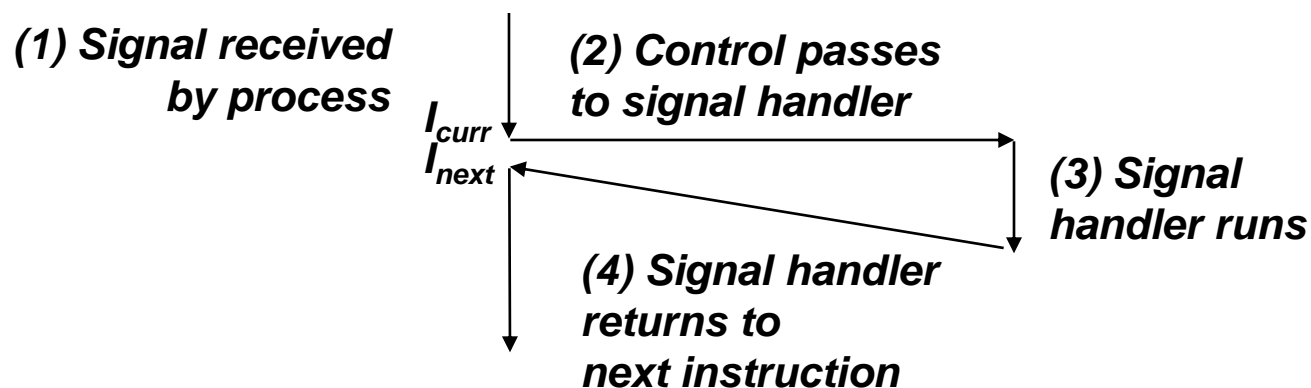

Signal Concepts: Pending and Blocked Signals


- A signal is *pending* if sent but not yet received
 - There can be at most one pending signal of any particular type
 - Important: Signals are not queued
 - If a process has a pending signal of type k , then subsequent signals of type k that are sent to that process are discarded
- A process can *block* the receipt of certain signals
 - Blocked signals can be delivered, but will not be received until the signal is unblocked
- A pending signal is received at most once

Signal Concepts: Pending/Blocked Bits

- Kernel maintains **pending** and **blocked** bit vectors in the context of each process
 - **pending**: represents the set of pending signals
 - Kernel sets bit *k* in **pending** when a signal of type *k* is delivered
 - Kernel clears bit *k* in **pending** when a signal of type *k* is received
 - **blocked**: represents the set of blocked signals
 - Can be set and cleared by using the **sigprocmask** function
 - Also referred to as the *signal mask*.

Sending Signals: Process Groups

- Every process belongs to exactly one process group

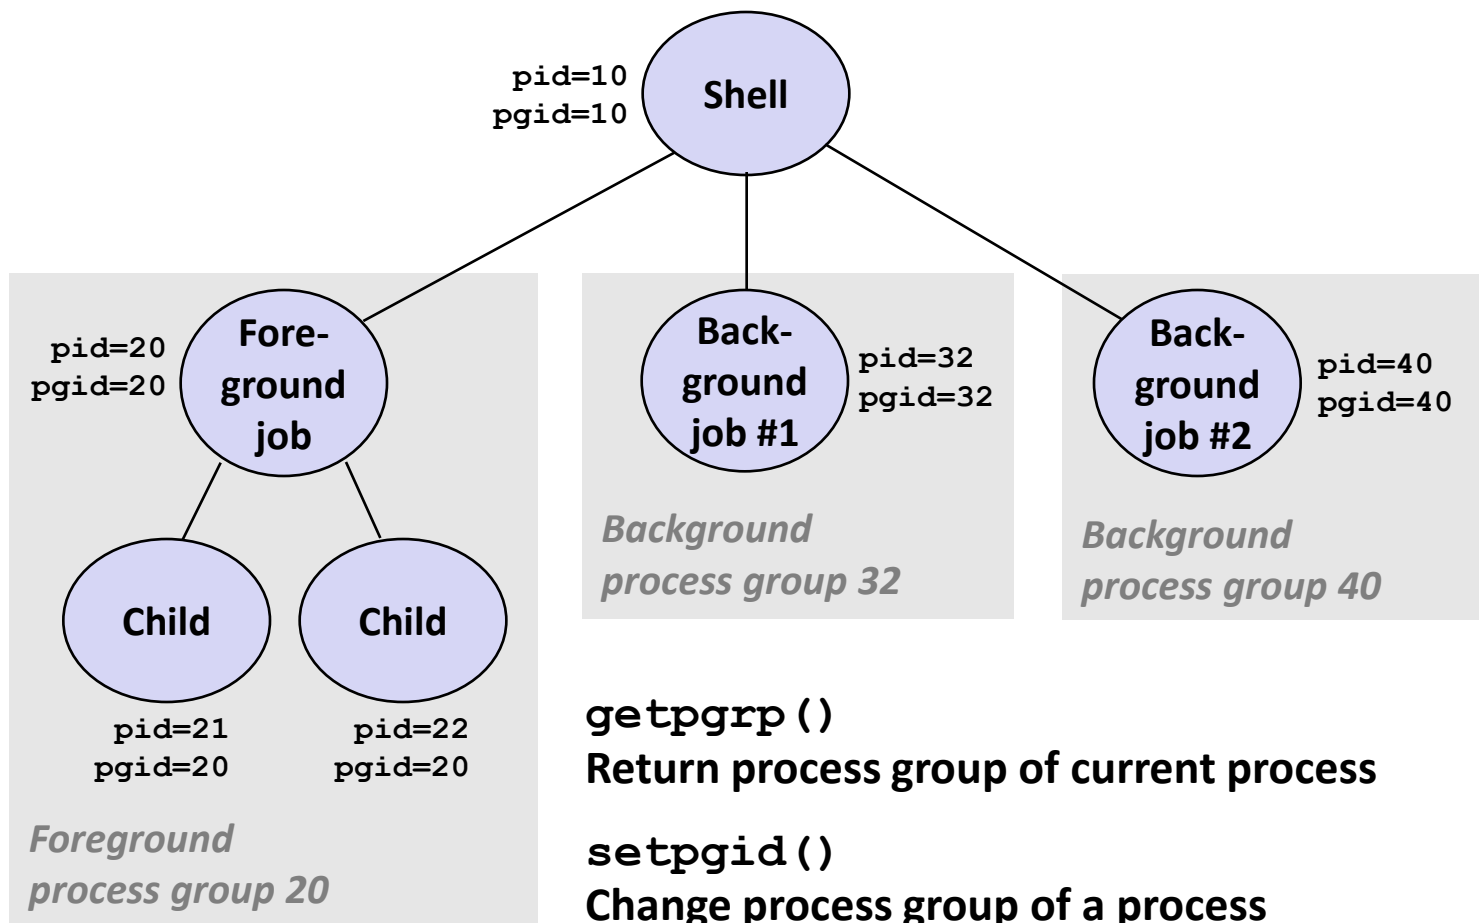

Sending Signals with `/bin/kill` Program

- `/bin/kill` program sends arbitrary signal to a process or process group

- Examples

- `/bin/kill -9 24818`
Send SIGKILL to process 24818

- `/bin/kill -9 -24817`
Send SIGKILL to every process in process group 24817

```
linux> ./forks 16
Child1: pid=24818 pgrp=24817
Child2: pid=24819 pgrp=24817
```


```
linux> ps
  PID TTY          TIME CMD
24788 pts/2        00:00:00 tcsh
24818 pts/2        00:00:02 forks
24819 pts/2        00:00:02 forks
24820 pts/2        00:00:00 ps
```

```
linux> /bin/kill -9 -24817
```

```
linux> ps
  PID TTY          TIME CMD
24788 pts/2        00:00:00 tcsh
24823 pts/2        00:00:00 ps
linux>
```


Sending Signals from the Keyboard

- Typing ctrl-c (ctrl-z) causes the kernel to send a SIGINT (SIGTSTP) to every job in the foreground process group.
 - SIGINT – default action is to terminate each process
 - SIGTSTP – default action is to stop (suspend) each process

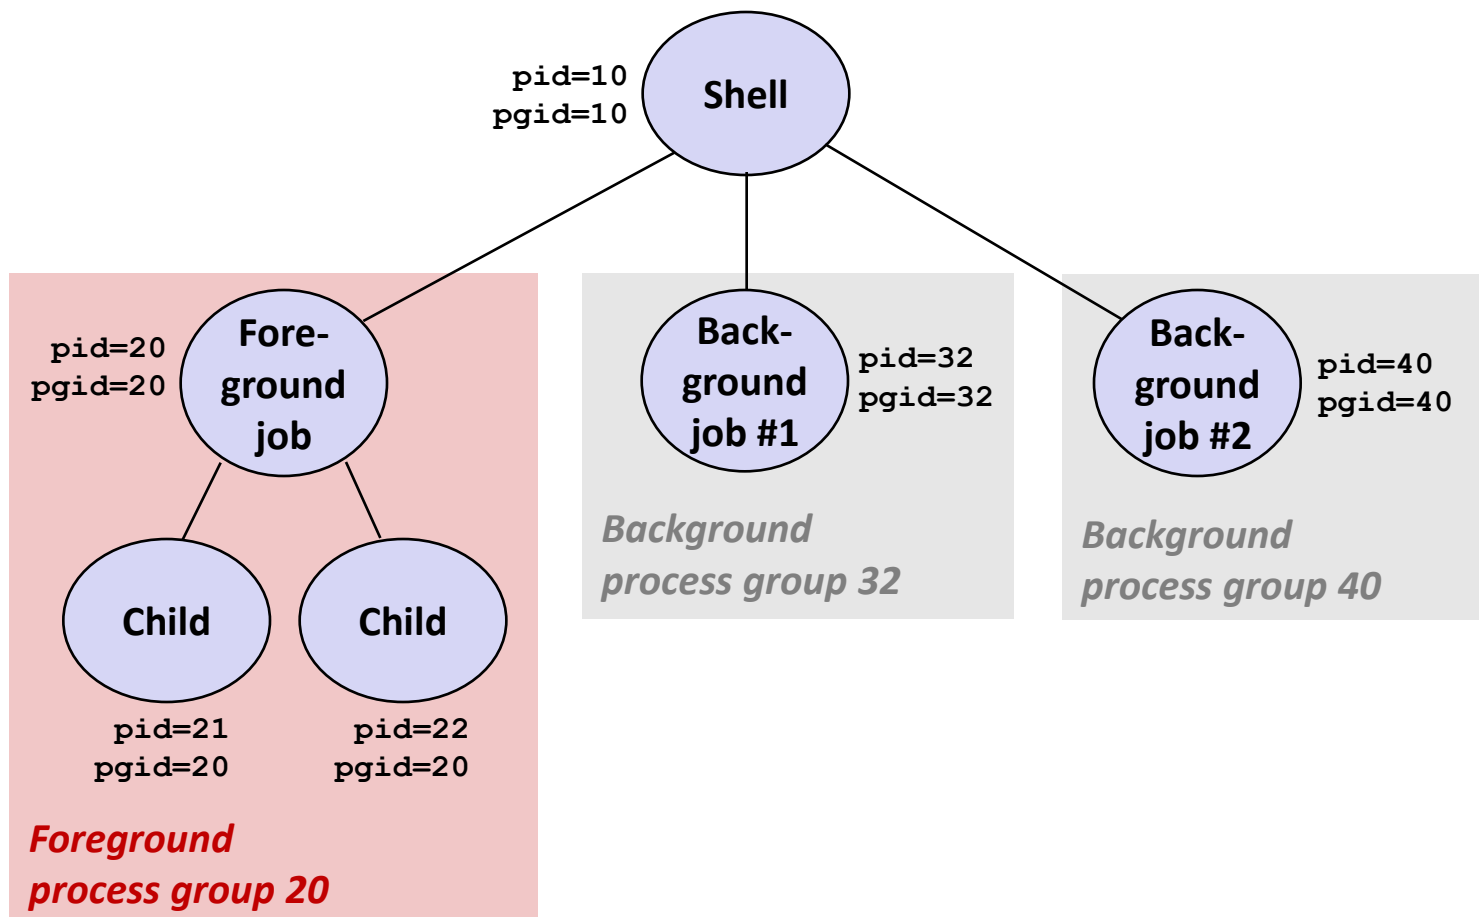

Example of `ctrl-c` and `ctrl-z`

```
bluefish> ./forks 17
Child: pid=28108 pgrp=28107
Parent: pid=28107 pgrp=28107
<types ctrl-z>
Suspended
bluefish> ps w
  PID TTY          STAT       TIME COMMAND
 27699 pts/8        Ss          0:00   -tcsh
 28107 pts/8        T           0:01   ./forks 17
 28108 pts/8        T           0:01   ./forks 17
 28109 pts/8        R+         0:00   ps w
bluefish> fg
./forks 17
<types ctrl-c>
bluefish> ps w
  PID TTY          STAT       TIME COMMAND
 27699 pts/8        Ss          0:00   -tcsh
 28110 pts/8        R+         0:00   ps w
```

STAT (process state) Legend:

First letter:

S: sleeping

T: stopped

R: running

Second letter:

s: session leader

+: foreground proc group

See “man ps” for more details

Sending Signals with `kill` Function


```
void fork12()
{
    pid_t pid[N];
    int i, child_status;
    for (i = 0; i < N; i++)
        if ((pid[i] = fork()) == 0)
            while(1); /* Child infinite loop */

    /* Parent terminates the child processes */
    for (i = 0; i < N; i++) {
        printf("Killing process %d\n", pid[i]);
        kill(pid[i], SIGINT);
    }

    /* Parent reaps terminated children */
    for (i = 0; i < N; i++) {
        pid_t wpid = wait(&child_status);
        if (WIFEXITED(child_status))
            printf("Child %d terminated with exit status %d\n",
                wpid, WEXITSTATUS(child_status));
        else
            printf("Child %d terminated abnormally\n", wpid);
    }
}
```

Receiving Signals

- Suppose kernel is returning from an exception handler and is ready to pass control to process p

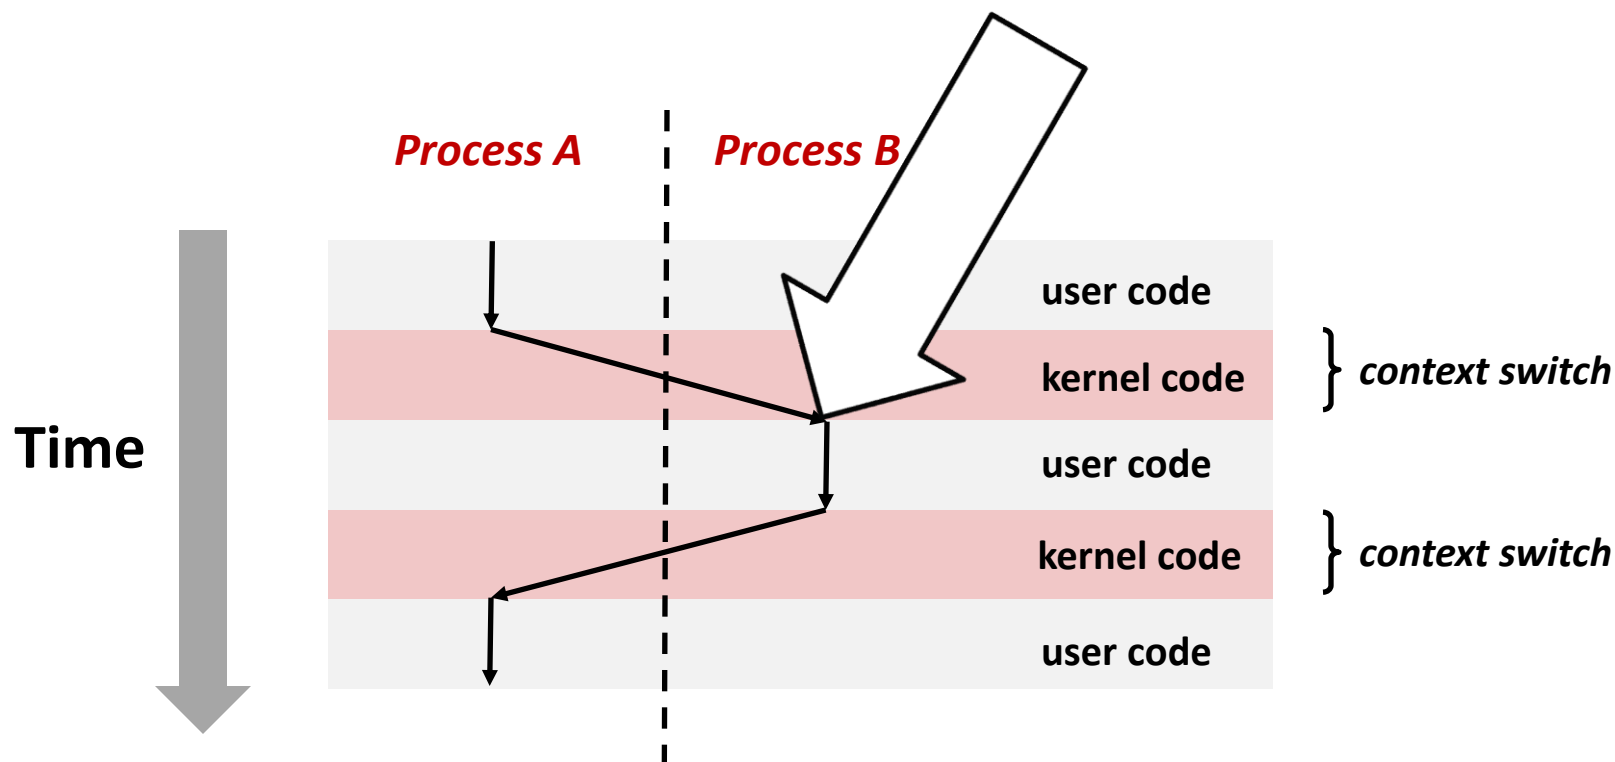

Important: All context switches are initiated by calling some exception handler.

Receiving Signals

- Suppose kernel is returning from an exception handler and is ready to pass control to process p
- Kernel computes $\mathbf{pnb} = \mathbf{pending} \ \& \ \sim\mathbf{blocked}$
 - The set of pending nonblocked signals for process p
- If $(\mathbf{pnb} == 0)$
 - Pass control to next instruction in the logical flow for p
- Else
 - Choose least nonzero bit k in \mathbf{pnb} and force process p to *receive* signal k
 - The receipt of the signal triggers some *action* by p
 - Repeat for all nonzero k in \mathbf{pnb}
 - Pass control to next instruction in logical flow for p

Default Actions

- Each signal type has a predefined *default action*, which is one of:
 - The process terminates
 - The process terminates and dumps core
 - The process stops until restarted by a SIGCONT signal
 - The process ignores the signal

Installing Signal Handlers

- The `signal` function modifies the default action associated with the receipt of signal `signum`:
 - `handler_t *signal(int signum, handler_t *handler)`
- Different values for `handler`:
 - `SIG_IGN`: ignore signals of type `signum`
 - `SIG_DFL`: revert to the default action on receipt of signals of type `signum`
 - Otherwise, `handler` is the address of a *signal handler*
 - Called when process receives signal of type `signum`
 - Referred to as *“installing”* the handler
 - Executing handler is called *“catching”* or *“handling”* the signal
 - When the handler executes its return statement, control passes back to instruction in the control flow of the process that was interrupted by receipt of the signal

Signal Handling Example

```
#include "csapp.h"

void sigint_handler(int sig) /* SIGINT handler */
{
    printf("So you think you can stop the bomb with ctrl-c, do you?\n");
    sleep(2);
    printf("Well...");
    fflush(stdout);
    sleep(1);
    printf("OK. :-)\n");
    exit(0);
}


int main()
{
    /* Install the SIGINT handler */
    if (signal(SIGINT, sigint_handler) == SIG_ERR)
        unix_error("signal error");

    /* Wait for the receipt of a signal */
    pause();


    return 0;
}
```


Signals Handlers as Concurrent Flows

- A signal handler is a separate logical flow (not process) that runs concurrently with the main program

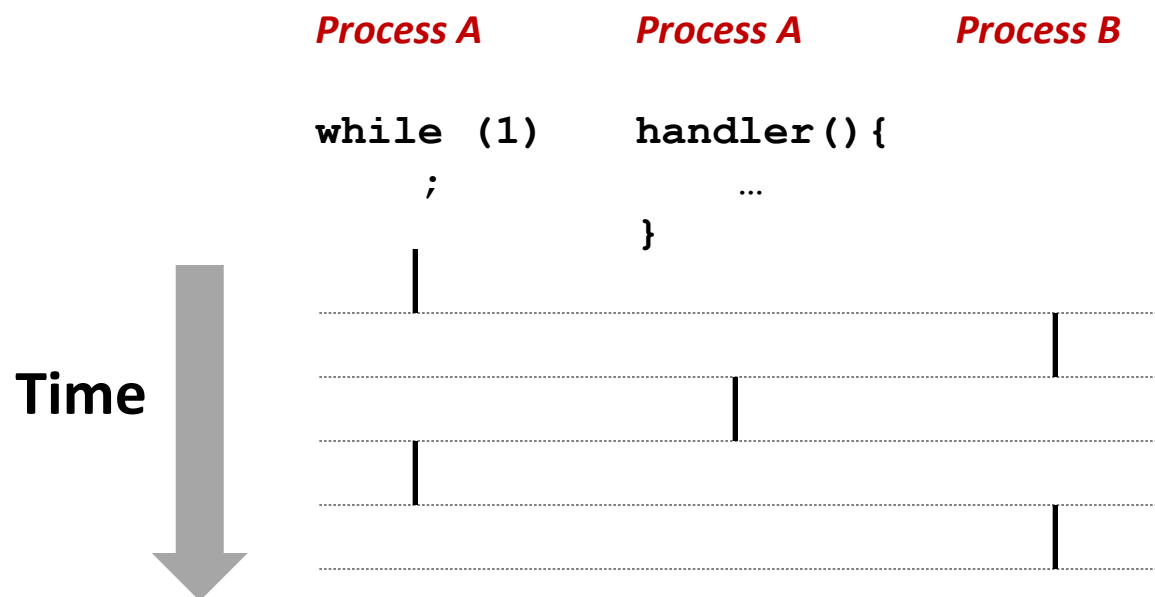


Another View of Signal Handlers as Concurrent Flows

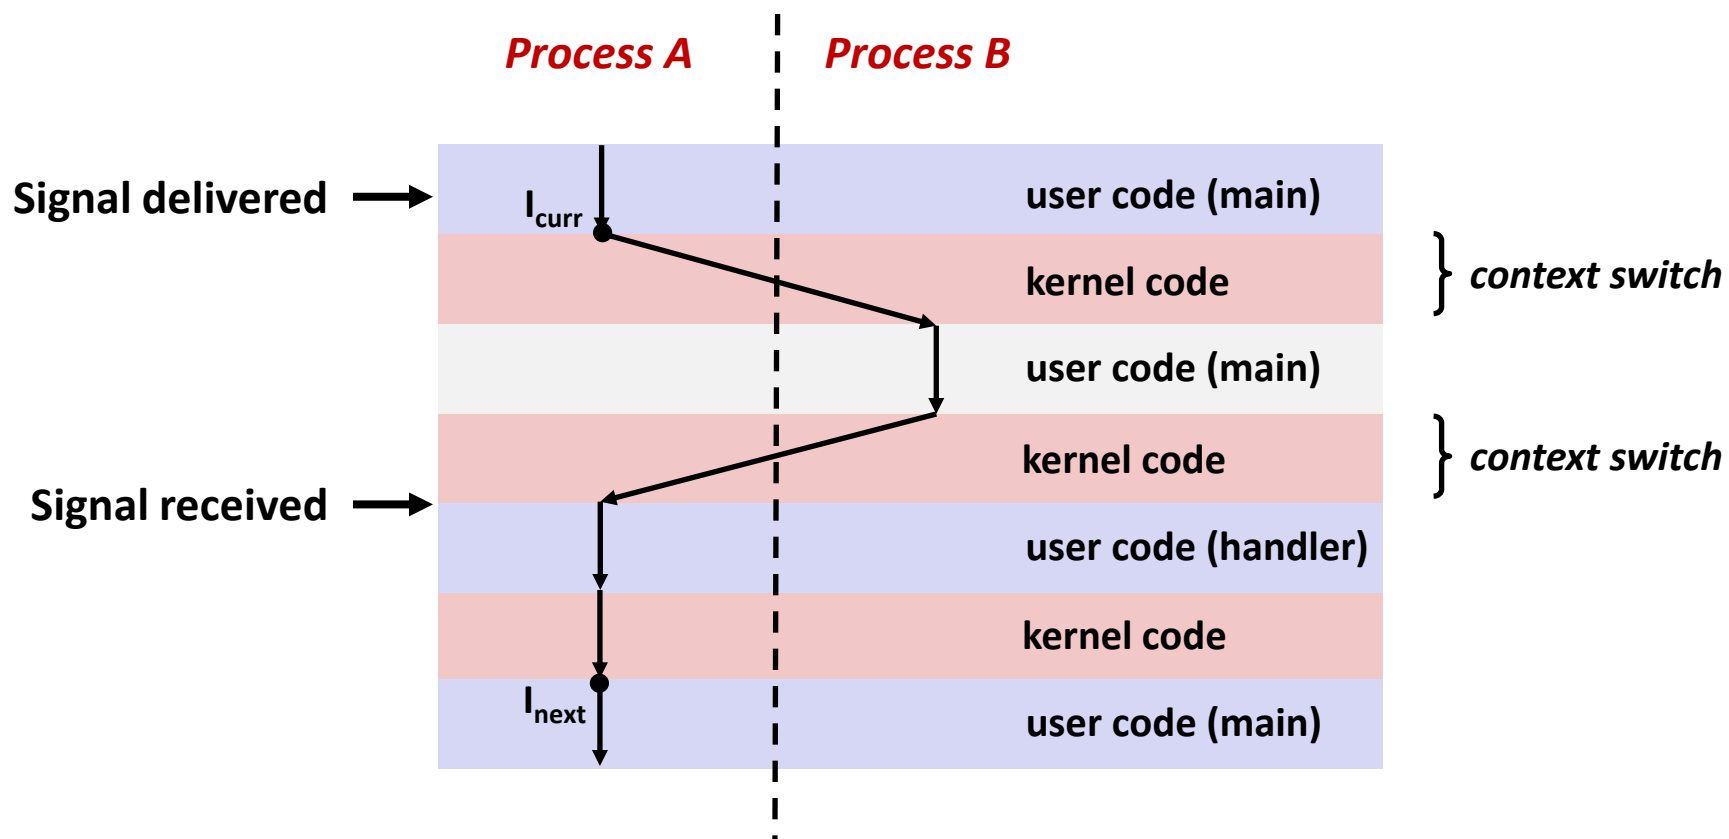

Nested Signal Handlers

- Handlers can be interrupted by other handlers

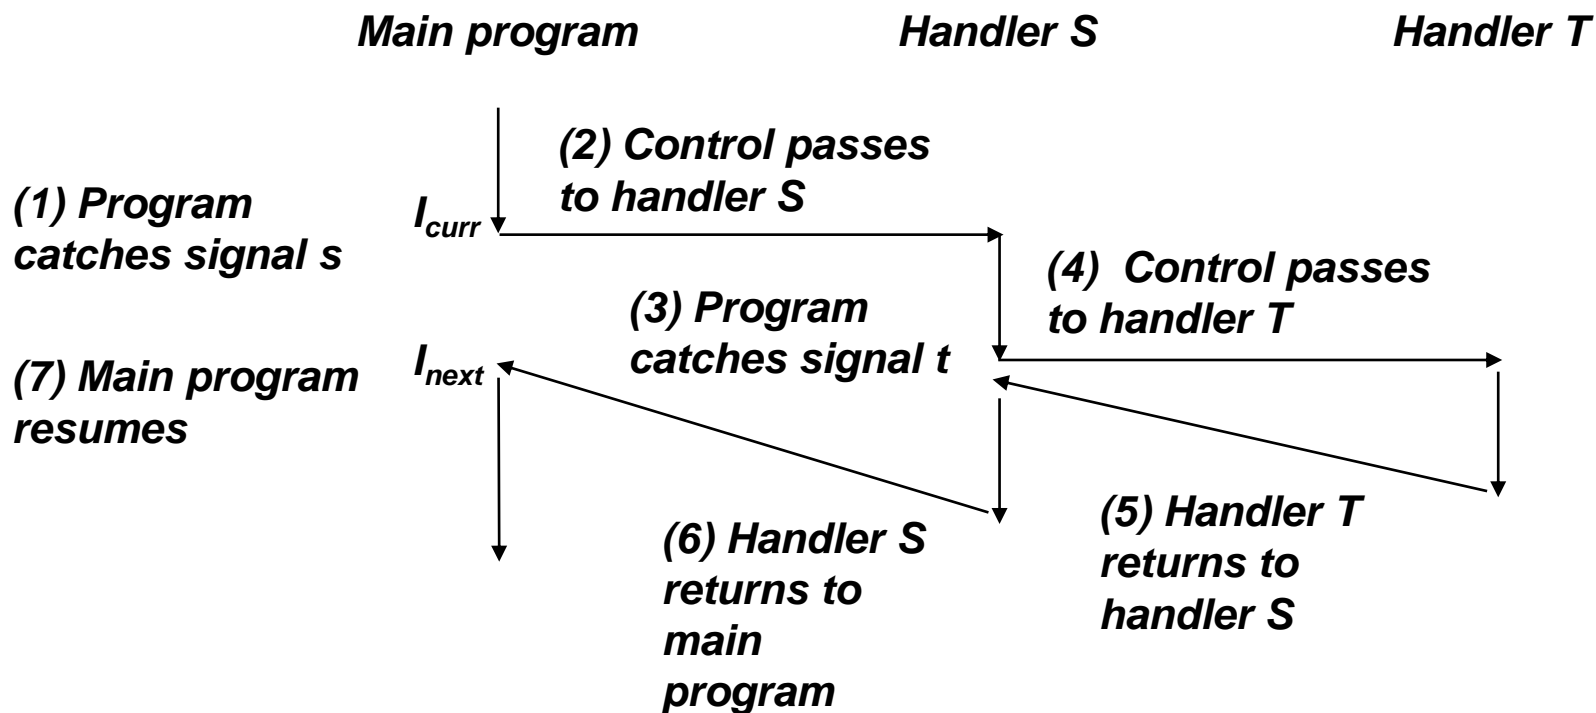

Blocking and Unblocking Signals

■ Implicit blocking mechanism

- Kernel blocks any pending signals of type currently being handled.
- E.g., A SIGINT handler can't be interrupted by another SIGINT

■ Explicit blocking and unblocking mechanism

- `sigprocmask` function

■ Supporting functions

- `sigemptyset` – create empty set
- `sigfillset` – add every signal number to set
- `sigaddset` – add signal number to set
- `sigdelset` – delete signal number from set

Temporarily Blocking Signals

```
sigset_t mask, prev_mask;

Sigemptyset(&mask);
Sigaddset(&mask, SIGINT);

/* Block SIGINT and save previous blocked set */
Sigprocmask(SIG_BLOCK, &mask, &prev_mask);

/* ... Code region that will not be interrupted by SIGINT */

/* Restore previous blocked set, unblocking SIGINT */
Sigprocmask(SIG_SETMASK, &prev_mask, NULL);
```

Guidelines for Writing Safe Handlers

- **Handlers are tricky because they are concurrent with main program and share the same global data structures.**
 - Shared data structures can become corrupted.
- **We'll explore concurrency issues later in the term.**
- **For now here are some guidelines to help you avoid trouble.**

Guidelines for Writing Safe Handlers

- **G0: Keep your handlers as simple as possible**
 - e.g., set a global flag and return
- **G1: Call only async-signal-safe functions in your handlers**
 - `printf`, `sprintf`, `malloc`, and `exit` are not safe!
- **G2: Save and restore `errno` on entry and exit**
 - So that other handlers don't overwrite your value of `errno`
- **G3: Protect accesses to shared data structures by temporarily blocking all signals.**
 - To prevent possible corruption
- **G4: Declare global variables as `volatile`**
 - To prevent compiler from storing them in a register
- **G5: Declare global flags as `volatile sig_atomic_t`**
 - *flag*: variable that is only read or written (e.g. `flag = 1`, not `flag++`)
 - `flag` declared this way does not need to be protected like other globals

Async-Signal-Safety

- Function is *async-signal-safe* if either reentrant (e.g., all variables stored on stack frame, CS:APP2e 12.7.2) or non-interruptible by signals.
- Posix guarantees 117 functions to be async-signal-safe
 - Source: “man 7 signal”
 - Popular functions on the list:
 - `_exit`, `write`, `wait`, `waitpid`, `sleep`, `kill`
 - Popular functions that are not on the list:
 - `exit`, **`printf`**, `sprintf`, `malloc`

Safely Generating Formatted Output

- Option 1: temporarily block all signals during each call to `printf` EVERYWHERE in the program.

```
/* safe_printf - async-signal-safe wrapper for printf */
void safe_printf(const char *format, ...)
{
    char buf[MAXBUF];
    va_list args;
    sigset_t mask, prev_mask;

    sigfillset(&mask);
    sigprocmask(SIG_BLOCK, &mask, &prev_mask);

    va_start(args, format);
    vsnprintf(buf, sizeof(buf), format, args);
    va_end(args);
    write(1, buf, strlen(buf));

    sigprocmask(SIG_SETMASK, &prev_mask, NULL);
}
```

Safely Generating Formatted Output

- **Option 2: Use the reentrant SIO (Safe I/O library) from `csapp.c` in your handlers.**

- `ssize_t sio_puts(char s[]) /* Put string */`
- `ssize_t sio_putl(long v) /* Put long */`
- `void sio_error(char s[]) /* Put msg & exit */`

- **The new `csapp.c` file is available on the course schedule page and your shell lab handout materials.**

```
void sigint_handler(int sig) /* Safe SIGINT handler */
{
    sio_puts("So you think you can stop the bomb with ctrl-c, do you?\n");
    sleep(2);
    sio_puts("Well...");
    sleep(1);
    sio_puts("OK. :-)\n");
    _exit(0);
}
```

Signal Handler Funkiness

```
int ccount = 0;
void child_handler(int sig)
{
    int child_status;
    pid_t pid = wait(&child_status);
    ccount--;
    safe_printf(
        "Received signal %d from process %d\n",
        sig, pid);
}

void fork14()
{
    pid_t pid[N];
    int i, child_status;
    ccount = N;
    signal(SIGCHLD, child_handler);
    for (i = 0; i < N; i++)
        if ((pid[i] = fork()) == 0) {
            sleep(1); /* deschedule child */
            exit(0); /* Child: Exit */
        }
    while (ccount > 0)
        pause(); /* Suspend until signal occurs */
}
```

- Pending signals are not queued
 - For each signal type, just have single bit indicating whether or not signal is pending
 - Even if multiple processes have sent this signal
 - This program may get stuck in final loop

Signal Handler Funkiness

```

int ccount = 0;
void child_handler(int sig)
{
    int child_status;
    pid_t pid = wait(&child_status);
    ccount--;
    safe_printf(
        "Received signal %d from process %d\n",
        sig, pid);
}

void fork14()
{
    pid_t pid[N];
    int i, child_status;
    ccount = N;
    signal(SIGCHLD, child_handler);
    for (i = 0; i < N; i++)
        if ((pid[i] = fork()) == 0)
            sleep(1); /*
            exit(0); /*
    }
    while (ccount > 0)
        pause(); /* Suspend until signal occurs */
}

```

- Pending signals are not queued
 - For each signal type, just have single bit indicating whether or not signal is pending
 - Even if multiple processes have sent this signal
 - This program may get stuck in final loop

```

linux> ./forks 14
Received SIGCHLD signal 17 for process 21344
Received SIGCHLD signal 17 for process 21345

```

Living With Nonqueuing Signals

■ Must wait for all terminated jobs

- Have handler loop with `waitpid` to get all jobs

```
void child_handler2(int sig)
{
    int child_status;
    pid_t pid;
    int n = 0;
    while ((pid = waitpid(-1, &child_status, WNOHANG)) > 0) {
        ccount--;
        safe_printf("Received signal %d from process %d.  n = %d\n",
                   sig, pid, n++);
    }
}

void fork15()
{
    . . .
    signal(SIGCHLD, child_handler2);
    . . .
}
```

Living With Nonqueuing Signals

■ Must wait for all terminated jobs

- Have handler loop with `waitpid` to get all jobs

```
void child_handler2(int sig)
{
    int child_status;
    pid_t pid;
    int n = 0;
    while ((pid = waitpid(-1, &child_status, WNOHANG)) > 0) {
        ccount--;
        safe_printf("Received signal %d from process %d.  n = %d\n",
                    sig, pid, n++);
    }
}
```

```
void fork15()
{
    . . .
    signal(SIGCHLD, child_handler2);
    . . .
}
```

```
greatwhite> forks 15
Received signal 17 from process 27476.  n = 0
Received signal 17 from process 27477.  n = 0
Received signal 17 from process 27478.  n = 0
Received signal 17 from process 27479.  n = 1
Received signal 17 from process 27480.  n = 0
greatwhite>
```

Portable Signal Handling

■ Different versions of Unix can have different signal handling semantics

- Restore action to default after catching signal
- Some interrupted system calls can return with EINTR
- Some systems don't block signals of the type being handled

■ Solution: `sigaction`

```
handler_t *Signal(int signum, handler_t *handler)
{
    struct sigaction action, old_action;

    action.sa_handler = handler;
    sigemptyset(&action.sa_mask); /* Block sigs of type being handled */
    action.sa_flags = SA_RESTART; /* Restart syscalls if possible */

    if (sigaction(signum, &action, &old_action) < 0)
        unix_error("Signal error");
    return (old_action.sa_handler);
}
```

Synchronizing Flows to Avoid Races

- Simple shell with a subtle synchronization error because it assumes parent runs before child.

```
int main(int argc, char **argv)
{
    int pid;
    sigset_t mask_all, prev_all;

    Sigfillset(&mask_all);
    Signal(SIGCHLD, handler);
    initjobs(); /* Initialize the job list */

    while (1) {
        if ((pid = Fork()) == 0) { /* Child */
            Execve("/bin/date", argv, NULL);
        }
        Sigprocmask(SIG_BLOCK, &mask_all, &prev_all); /* Parent */
        addjob(pid); /* Add the child to the job list */
        Sigprocmask(SIG_SETMASK, &prev_all, NULL);
    }
    exit(0);
}
```


Synchronizing Flows to Avoid Races

■ SIGCHLD handler for a simple shell

```
void handler(int sig)
{
    int olderrno = errno;
    sigset_t mask_all, prev_all;
    pid_t pid;

    Sigfillset(&mask_all);
    while ((pid = waitpid(-1, NULL, 0)) > 0) { /* Reap child */
        Sigprocmask(SIG_BLOCK, &mask_all, &prev_all);
        deletejob(pid); /* Delete the child from the job list */
        Sigprocmask(SIG_SETMASK, &prev_all, NULL);
    }
    if (errno != ECHILD)
        Sio_error("waitpid error");
    errno = olderrno;
}
```

Corrected Shell Program w/o Race

```
int main(int argc, char **argv)
{
    int pid;
    sigset_t mask_all, mask_one, prev_one;

    Sigfillset(&mask_all);
    Sigemptyset(&mask_one);
    Sigaddset(&mask_one, SIGCHLD);
    Signal(SIGCHLD, handler);
    initjobs(); /* Initialize the job list */

    while (1) {
        Sigprocmask(SIG_BLOCK, &mask_one, &prev_one); /* Block SIGCHLD */
        if ((pid = Fork()) == 0) { /* Child process */
            Sigprocmask(SIG_SETMASK, &prev_one, NULL); /* Unblock SIGCHLD */
            Execve("/bin/date", argv, NULL);
        }
        Sigprocmask(SIG_BLOCK, &mask_all, NULL); /* Parent process */
        addjob(pid); /* Add the child to the job list */
        Sigprocmask(SIG_SETMASK, &prev_one, NULL); /* Unblock SIGCHLD */
    }
    exit(0);
}
```

Explicitly Waiting for Signals

```
int main(int argc, char **argv) {
    sigset_t mask, prev;
    Signal(SIGCHLD, sigchld_handler);
    Signal(SIGINT, sigint_handler);
    Sigemptyset(&mask);
    Sigaddset(&mask, SIGCHLD);

    while (1) {
        Sigprocmask(SIG_BLOCK, &mask, &prev); /* Block SIGCHLD */
        if (Fork() == 0) /* Child */
            exit(0);
        /* Parent */
        pid = 0;
        Sigprocmask(SIG_SETMASK, &prev, NULL); /* Unblock SIGCHLD */

        /* Wait for SIGCHLD to be received (wasteful!) */
        while (!pid)
            ;
        /* Do some work after receiving SIGCHLD */
        printf(".");
    }
    exit(0);
}
```

Explicitly Waiting for Signals

- Handlers for program explicitly waiting for SIGCHLD to arrive.

```
volatile sig_atomic_t pid;

void sigchld_handler(int s)
{
    int olderrno = errno;
    pid = waitpid(-1, NULL, 0); /* Main waiting for nonzero pid */
    errno = olderrno;
}

void sigint_handler(int s)
{
}
```

Explicitly Waiting for Signals

- Program is correct, but very wasteful
- Other options:

```
while (!pid) /* Race! */  
    pause();
```

```
while (!pid) /* Too slow! */  
    sleep(1);
```

- Solution: `sigsuspend`

Waiting for Signals with `sigsuspend`

- `int sigsuspend(const sigset_t *mask)`
- Equivalent to atomic (uninterruptable) version of:

```
sigprocmask(SIG_BLOCK, &mask, &prev);  
pause();  
sigprocmask(SIG_SETMASK, &prev, NULL);
```

Waiting for Signals with `sigsuspend`

```
int main(int argc, char **argv) {
    sigset_t mask, prev;
    Signal(SIGCHLD, sigchld_handler);
    Signal(SIGINT, sigint_handler);
    Sigemptyset(&mask);
    Sigaddset(&mask, SIGCHLD);

    while (1) {
        Sigprocmask(SIG_BLOCK, &mask, &prev); /* Block SIGCHLD */
        if (Fork() == 0) /* Child */
            exit(0);

        /* Wait for SIGCHLD to be received */
        pid = 0;
        while (!pid)
            sigsuspend(&prev);

        /* Optionally unblock SIGCHLD */
        Sigprocmask(SIG_SETMASK, &prev, NULL);
        /* Do some work after receiving SIGCHLD */
        printf(".");
    }
    exit(0);
}
```

Summary

- **Shells exemplify programs overseeing process lifecycle**
- **Signals provide process-level exception handling**
 - Can generate from user programs
 - Can define effect by declaring signal handler

Additional slides

What Is a “Background Job”?

- **Users generally run one command at a time**
 - Type command, read output, type another command
- **Some programs run “for a long time”**
 - Example: “delete this file in two hours”

```
unix> sleep 7200; rm /tmp/junk # shell stuck for 2 hours
```

- **A “background” job is a process we don't want to wait for**

```
unix> (sleep 7200 ; rm /tmp/junk) &  
[1] 907  
unix> # ready for next command
```

The World of Multitasking

- **System runs many processes concurrently**
- **Process: executing program**
 - State includes memory image + register values + program counter
- **Regularly switches from one process to another**
 - Suspend process when it needs I/O resource or timer event occurs
 - Resume process when I/O available or given scheduling priority
- **Appears to user(s) as if all processes executing simultaneously**
 - Even though systems can only execute one process (or a small number of processes) at a time
 - Except possibly with lower performance than if running alone

Programmer's Model of Multitasking

■ Basic functions

- **fork** spawns new process
 - Called once, returns twice
- **exec** optionally replaces code & data of one side
- **exit** terminates own process
 - Called once, never returns
 - Puts it into “zombie” status
- **wait** and **waitpid** wait for and reap terminated children
- **execve** runs new program in existing process
 - Called once, (normally) never returns

■ Programming challenge

- Understanding the nonstandard semantics of the functions
- Avoiding improper use of system resources
 - E.g. “Fork bombs” can disable a system

Signal Handling Example

```
void int_handler(int sig) {
    safe_printf("Process %d received signal %d\n", getpid(), sig);
    exit(0);
}
```

```
void fork13() {
    pid_t pid[N];
    int i, child_status;
    signal(SIGINT, int_handler);
    for (i = 0; i < N; i++)
        if ((pid[i] = fork()) == 0
            while(1); /* child inf
        }
    for (i = 0; i < N; i++) {
        printf("Killing process %d\n", pid[i]);
        kill(pid[i], SIGINT);
    }
    for (i = 0; i < N; i++) {
        pid_t wpid = wait(&child_status);
        if (WIFEXITED(child_status))
            printf("Child %d terminated with exit status %d\n",
                wpid, WEXITSTAT);
        else
            printf("Child %d terminated with exit status %d\n",
                wpid, WEXITSTAT);
    }
}
```

```
linux> ./forks 13
Killing process 25417
Killing process 25418
Killing process 25419
Killing process 25420
Killing process 25421
Process 25417 received signal 2
Process 25418 received signal 2
Process 25420 received signal 2
Process 25421 received signal 2
Process 25419 received signal 2
Child 25417 terminated with exit status 0
Child 25418 terminated with exit status 0
Child 25420 terminated with exit status 0
Child 25419 terminated with exit status 0
Child 25421 terminated with exit status 0
linux>
```

A Program That Reacts to Internally Generated Events

```
#include <stdio.h>
#include <signal.h>

int beeps = 0;

/* SIGALRM handler */
void handler(int sig) {
    safe_printf("BEEP\n");

    if (++beeps < 5)
        alarm(1);
    else {
        safe_printf("BOOM!\n");
        _exit(0);
    }
}
```

internal.c

```
main() {
    signal(SIGALRM, handler);
    alarm(1); /* send SIGALRM in
              1 second */

    while (1) {
        /* handler returns here */
    }
}
```

```
linux> ./internal
BEEP
BEEP
BEEP
BEEP
BEEP
BOOM!
bass>
```

Nonlocal Jumps: `setjmp/longjmp`

- **Powerful (but dangerous) user-level mechanism for transferring control to an arbitrary location**
 - Controlled to way to break the procedure call / return discipline
 - Useful for error recovery and signal handling
- **`int setjmp(jmp_buf j)`**
 - Must be called before `longjmp`
 - Identifies a return site for a subsequent `longjmp`
 - Called once, returns one or more times
- **Implementation:**
 - Remember where you are by storing the current *register context*, *stack pointer*, and *PC value* in `jmp_buf`
 - Return 0

setjmp/longjmp (cont)

■ `void longjmp(jmp_buf j, int i)`

- Meaning:
 - return from the `setjmp` remembered by jump buffer `j` again ...
 - ... this time returning `i` instead of 0
- Called after `setjmp`
- Called once, but never returns

■ `longjmp` Implementation:

- Restore register context (stack pointer, base pointer, PC value) from jump buffer `j`
- Set `%eax` (the return value) to `i`
- Jump to the location indicated by the PC stored in jump buf `j`

setjmp/longjmp Example

```
#include <setjmp.h>
jmp_buf buf;


main() {
    if (setjmp(buf) != 0) {
        printf("back in main due to an error\n");
    } else {
        printf("first time through\n");
        p1(); /* p1 calls p2, which calls p3 */
    }
    ...
    p3() {
        <error checking code>
        if (error)
            longjmp(buf, 1)
    }
}
```

Limitations of Nonlocal Jumps

■ Works within stack discipline

- Can only long jump to environment of function that has been called but not yet completed

```
jmp_buf env;  
  
P1()  
{  
    if (setjmp(env)) {  
        /* Long Jump to here */  
    } else {  
        P2();  
    }  
}  
  
P2()  
{ . . . P2(); . . . P3(); }
```

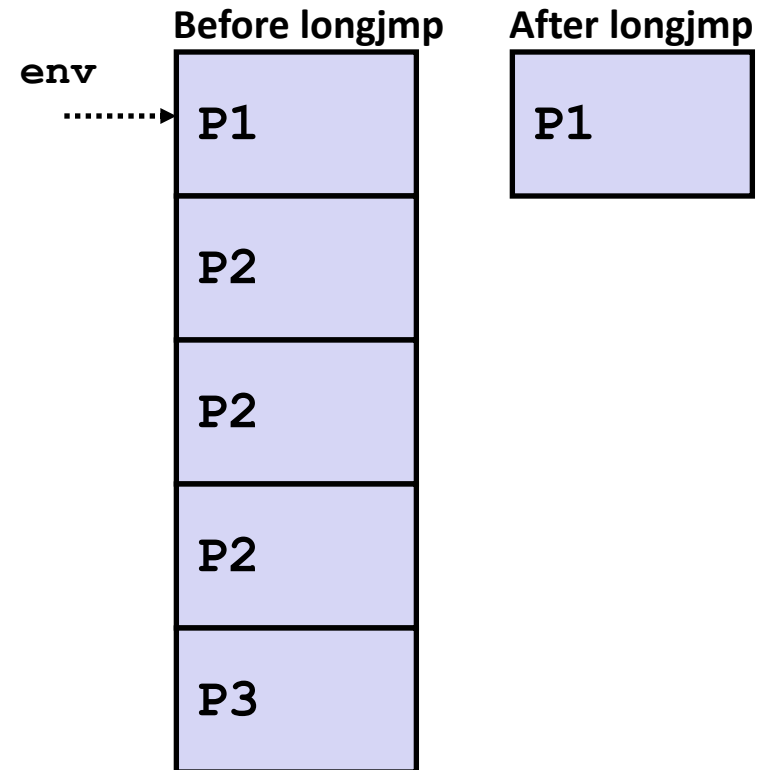

Limitations of Long Jumps (cont.)

■ Works within stack discipline

- Can only long jump to environment of function that has been called but not yet completed

```


jmp_buf env;

P1 ()
{
    P2 (); P3 ();
}

P2 ()
{
    if (setjmp(env)) {
        /* Long Jump to here */
    }
}

P3 ()
{
    longjmp(env, 1);
}

```

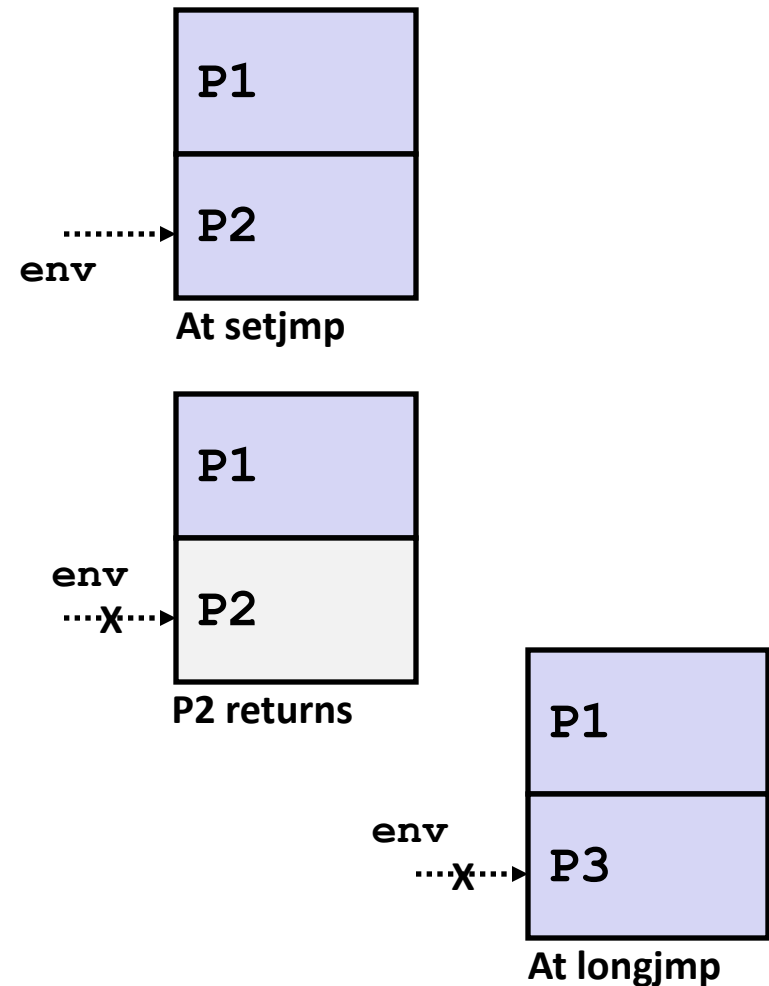

Putting It All Together: A Program That Restarts Itself When `ctrl-c`'d

```
#include <stdio.h>
#include <signal.h>
#include <setjmp.h>

sigjmp_buf buf;

void handler(int sig) {
    siglongjmp(buf, 1);
}

main() {
    signal(SIGINT, handler);

    if (!sigsetjmp(buf, 1))
        printf("starting\n");
    else
        printf("restarting\n");

    while(1) {
        sleep(1);
        printf("processing...\n");
    }
}
```

```
greatwhite> ./restart
starting
processing...
processing...
processing...
restarting
processing... ← Ctrl-c
processing...
restarting
processing... ← Ctrl-c
processing...
processing...
```

restart.c

A Program That Reacts to Externally Generated Events (Ctrl-c)

```
#include <stdlib.h>
#include <stdio.h>
#include <signal.h>

void handler(int sig) {
    safe_printf("You think hitting ctrl-c will stop the bomb?\n");
    sleep(2);
    safe_printf("Well...");
    sleep(1);
    printf("OK\n");
    exit(0);
}

main() {
    signal(SIGINT, handler); /* installs ctrl-c handler */
    while(1) {
    }
}
```

```
linux> ./external
<ctrl-c>
You think hitting ctrl-c will stop
the bomb?
Well...OK
linux>
```

external.c