

15-410

“...Does this look familiar?...”

File System (Internals)

Nov. 14, 2007

Dave Eckhardt

Roger Dannenberg

Greg Hartman

CMU Computer Club Presents



Jay Crim

Senior Software Engineer

Natural Language Processing at Google

7PM, Thursday Nov. 15
NSH 3305

Synchronization

Today

- Chapter 11 (not: Log-structured, NFS, WAFL)

Outline

File system code layers (abstract)

Disk, memory structures

Unix “VFS” layering indirection

Directories

Block allocation strategies, free space

Cache tricks

Recovery, backups

File System Layers

Device drivers

- `read/write(disk, start-sector, count)`

Block I/O

- `read/write(partition, block) [cached]`

File I/O

- `read/write(file, block)`

File system

- manage directories, free space

File System Layers

Multi-filesystem namespace

- Partitioning, names for devices
- Mounting
- Unifying multiple file system *types*
 - UFS, ext2fs, ext3fs, reiserfs, FAT, 9660, ...

Shredding Disks

Split disk into *partitions*/slices/minidisks/...

- PC: 4 “partitions” –e.g., Windows, FreeBSD, Plan 9
- Mac: “volumes” –can do: OS 9, OS X, user files

Or: glue disks together into *volumes*/logical disks

Partition may contain...

- Paging area
 - Indexed by in-memory structures
 - “random garbage” when OS shuts down
- File system
 - Block allocation: file # $\Rightarrow$ block list
 - Directory: name $\Rightarrow$ file #

Shredding Disks

```
# fdisk -s
```

```
/dev/ad0: 993 cyl 128 hd 63 sec
```

Part	Start	Size	Type	Flags
1:	63	1233729	0x06	0x00
2:	1233792	6773760	0xa5	0x80

Shredding Disks

8 partitions:

#	size	offset	fstype	[fsize	bsize	bps/cpg]		
a:	131072	0	4.2BSD	2048	16384	101	# (Cyl.	0 - 16*)
b:	393216	131072	swap				# (Cyl.	16* - 65*)
c:	6773760	0	unused	0	0		# (Cyl.	0 - 839)
e:	65536	524288	4.2BSD	2048	16384	104	# (Cyl.	65* - 73*)
f:	6183936	589824	4.2BSD	2048	16384	89	# (Cyl.	73* - 839*)

Filesystem	1K-blocks	Used	Avail	Capacity	Mounted on
/dev/ad0s2a	64462	55928	3378	94%	/
/dev/ad0s2f	3043806	2608458	191844	93%	/usr
/dev/ad0s2e	32206	7496	22134	25%	/var
procfs	4	4	0	100%	/proc

(FreeBSD 4.7 on ThinkPad 560X)

Disk Structures

Boot area (first block/track/cylinder)

- Interpreted by hardware bootstrap (“BIOS”)
- May include partition table

File system control block

- Key parameters: #blocks, metadata layout
- Unix: “superblock”

“File control block” (Unix: “inode”)

- ownership/permissions
- data location

Possibly a free-space map as well

Memory Structures

In-memory partition tables

- Sanity check file system I/O in correct partition

Cached directory information

System-wide open-file table

- In-memory file control blocks

Process open-file tables

- Open mode (read/write/append/...)
- “Cursor” (read/write position)

VFS layer

Goal

- Allow one machine to use multiple file system *types*
 - Unix FFS
 - MS-DOS FAT
 - CD-ROM ISO9660
 - Remote/distributed: NFS/AFS
- Standard system calls should work transparently

Solution

- Insert a level of indirection!

Single File System

```
n = read(fd, buf, size)
```

```
INT 54
```

```
sys_read(fd, buf, len)
```

```
namei()
```

```
iget()
```

```
iput()
```

```
sleep()
```

```
rdblk(dev, N)
```

```
wakeup()
```

```
startIDE()
```

```
IDEintr()
```

VFS “Virtualization”

```
n = read(fd, buf, size)
```

```
INT 54
```

```
namei()
```

```
vfs_read()
```

```
ufs_read()
```

```
procfs_read()
```

```
ufs_lookup()
```

```
procfs_domem()
```

```
iget()
```

```
iput()
```

VFS layer –file system operations

```
struct vfsops {  
    char *name;  
    int (*vfs_mount)();  
    int (*vfs_statfs)();  
    int (*vfs_vget)();  
    int (*vfs_unmount)();  
    ...  
}
```

These operate on file system, not individual files

VFS layer –file operations

Each VFS provides an array of per-file methods

- VOP_LOOKUP(vnode, new_vnode, name)
- VOP_CREATE(vnode, new_vnode, name, attributes)
- VOP_OPEN(vnode, mode, credentials, process)
- VOP_READ(vnode, uio, readwrite, credentials)

Operating system provides fs-independent code

- Validating system call parameters
- Moving data from/to user memory
- Thread sleep/wakeup
- Caches (data blocks, name $\Rightarrow$ vnode mappings)

Directories

From one namei() $\Rightarrow$ fs-provided vnode method

- `vnode2 = VOP_LOOKUP(vnode1, name)`

Traditional Unix FFS directories

- List of (name,inode #) - not sorted!
- Names are variable-length
- Lookup is linear
 - How long does it take to delete N files?

Common alternative: hash-table directories

Allocation / Mapping

Allocation problem

- Where do I put the next block of this file?
 - “Near the previous block” is not a bad idea

Mapping problem

- Where was block 32 of this file previously put?
- Similar to virtual memory
 - Multiple large “address spaces” *specific to each file*
 - Only one underlying “address space” of blocks
 - Source address space may be sparse!

Allocation / Mapping

Contiguous

Linked

FAT

Indexed

Linked

Multi-level

Unix (index tree)

Allocation –Contiguous

Approach

- File location defined as (start, length)

Motivation

- Sequential disk accesses are cheap
- Bookkeeping is easy

Issues

- Dynamic storage allocation (fragmentation, compaction)
- Must pre-declare file size at creation
- This should sound familiar

Allocation –Linked

Approach

- File location defined as (start)
- Each disk block contains pointer to next block

Motivation

- Avoids fragmentation problems
- Allows file growth

Issues?

Allocation –Linked

Issues

- 508-byte blocks don't match memory pages
- In general, one seek per block read/written - *slow!*
- *Very* hard to access file blocks at random
 - `lseek(fd, 37 * 1024, SEEK_SET);`

Benefit

- Can recover files even if directories destroyed

Common modification

- Link multi-block *clusters*, not blocks

Allocation –FAT

Used by MS-DOS, OS/2, Windows

- Digital cameras, GPS receivers, printers, PalmOS, ...

Semantically same as linked allocation

Next-block links stored “out of band” in a table

- Result: nice 512-byte sectors for data

Table at start of disk

- Next-block pointer array
- Indexed by block number
- Next=0 means “free”

Allocation –FAT

7
2
5
-1
3
-1
0
-1


hello.jav	0
dir. c	1
sys.ini	4

Allocation - FAT


7
2
5
-1
3
-1
0
-1

hello.jav	0
dir. c	1
sys.ini	4

Allocation - FAT

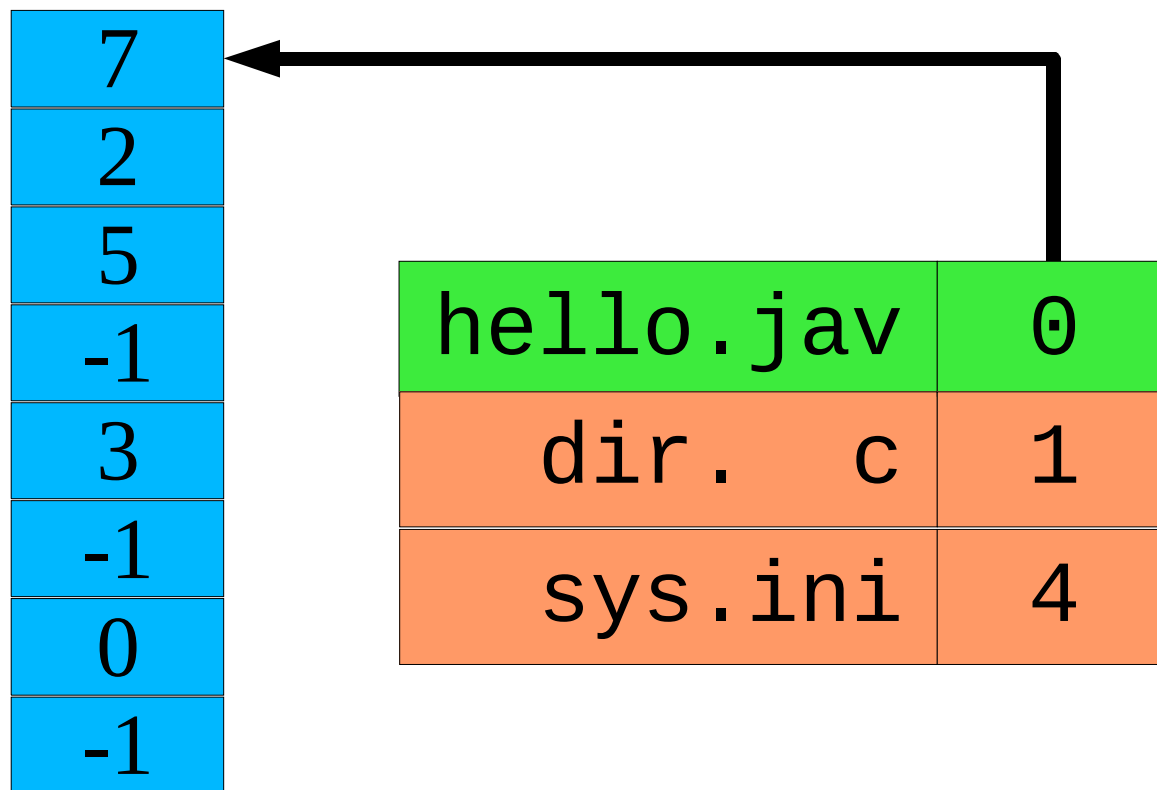

Allocation - FAT

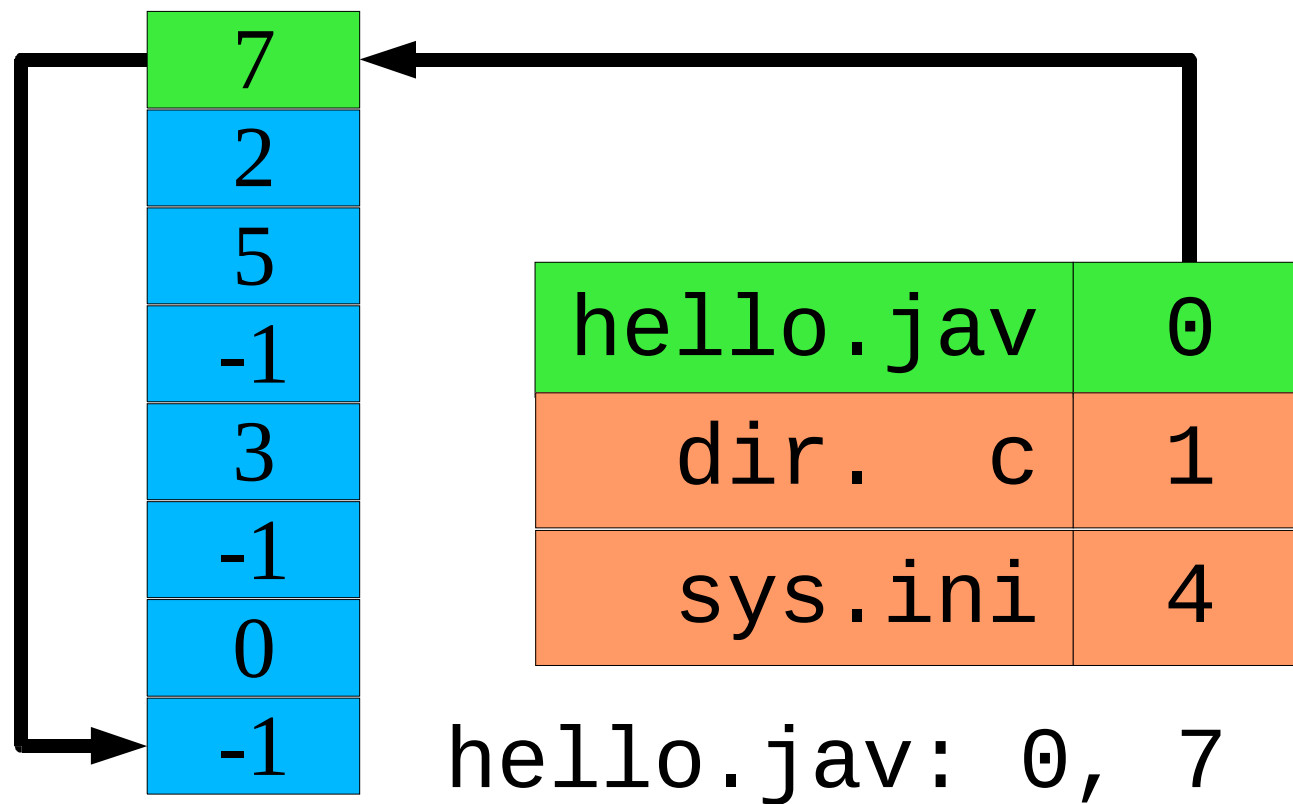

Allocation –FAT

Issues

- Damage to FAT scrambles entire file system
 - Solution: backup FAT
- Generally *two* seeks per block read/write
 - Seek to FAT, read, seek to actual block (repeat)
 - Unless FAT can be cached well in RAM
- Still *somewhat* hard to access random file blocks
 - Linear time to walk through FAT
- FAT may be a “hot spot” (everybody needs to access it)
- Lots of FAT updates (near beginning of disk)
 - Even if files being modified are far away

Allocation –Indexed

Motivation

- Avoid fragmentation problems
- Allow file growth
- *Improve random access*

Approach

- *Per-file* block array

99	3004
100	-1
101	-1
3001	-1
3002	6002
-1	-1
-1	-1
-1	-1

Allocation –Indexed

Allows “holes”

- foo.c is sequential
- foo.db, blocks 1..3 $\Rightarrow$ -1
 - logically “blank”

“sparse allocation”

- a.k.a. “holes”
- read() returns nulls
- write() requires alloc
- file “size” $\neq$ file “size”
 - ls -l index of last byte
 - ls -s number of blocks

foo.c	foo.db
99	3004
100	-1
101	-1
3001	-1
3002	6002
-1	-1
-1	-1
-1	-1

Allocation –Indexed

How big should index block be?

- Too small: limits file size
- Too big: lots of wasted pointers

Combining index blocks

- Linked
- Multi-level
- What Unix actually does


Linked Index Blocks

**Last pointer indicates
next index block**

Simple

Access is not-so-random

- $O(n/c)$ is still $O(n)$
- $O(n)$ *disk transfers*

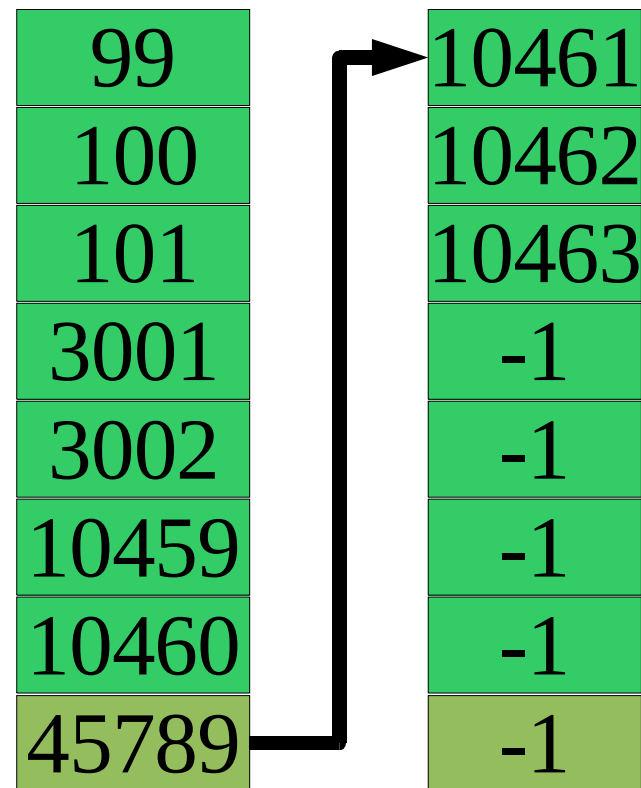


Multi-Level Index Blocks

**Index blocks of index
blocks**

Does this look familiar?

Allows *big* holes

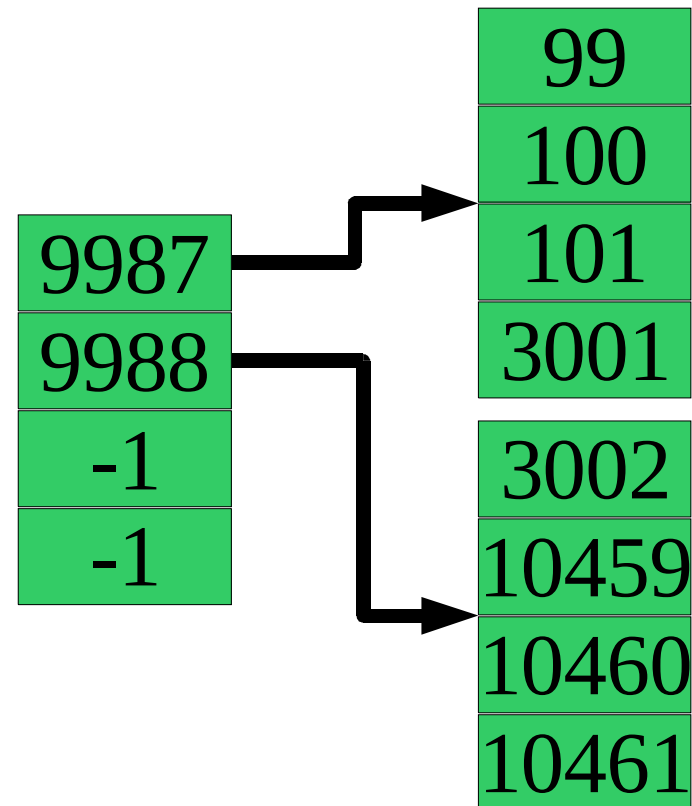

Unix Index Blocks


Intuition

- *Many* files are small
 - Length = 0, length = 1, length < 80, ...
- Some files are *huge* (3 gigabytes)


“Clever heuristic” in Unix FFS inode

- inode struct contains 12 “direct” block pointers
 - 12 block numbers * 8 KB/block = 96 KB
 - Availability is “free” - must read inode to open() file anyway
- inode struct also contains 3 indirect block pointers
 - single-indirect, double-indirect, triple-indirect


Unix Index Blocks

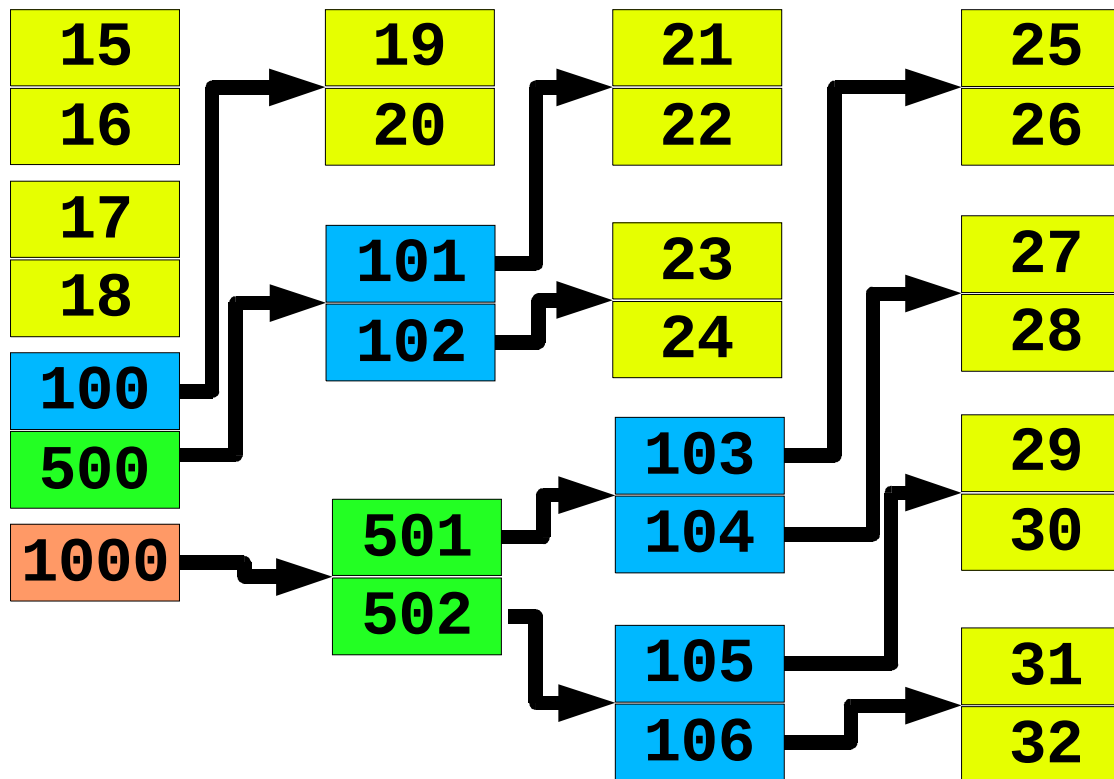


Unix Index Blocks

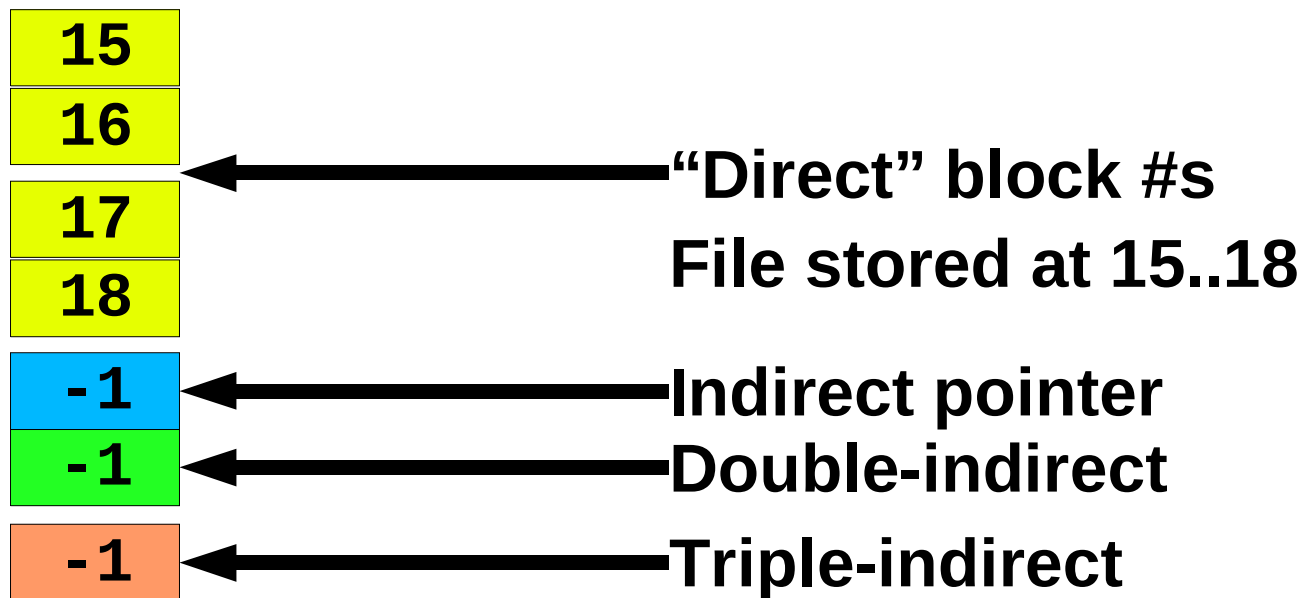


Unix Index Blocks

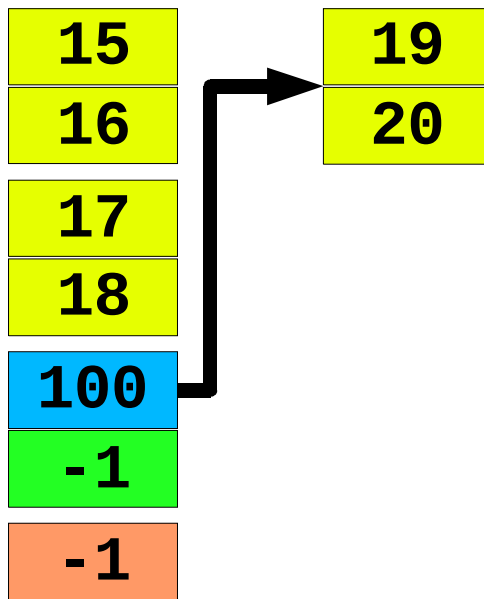

Unix Index Blocks

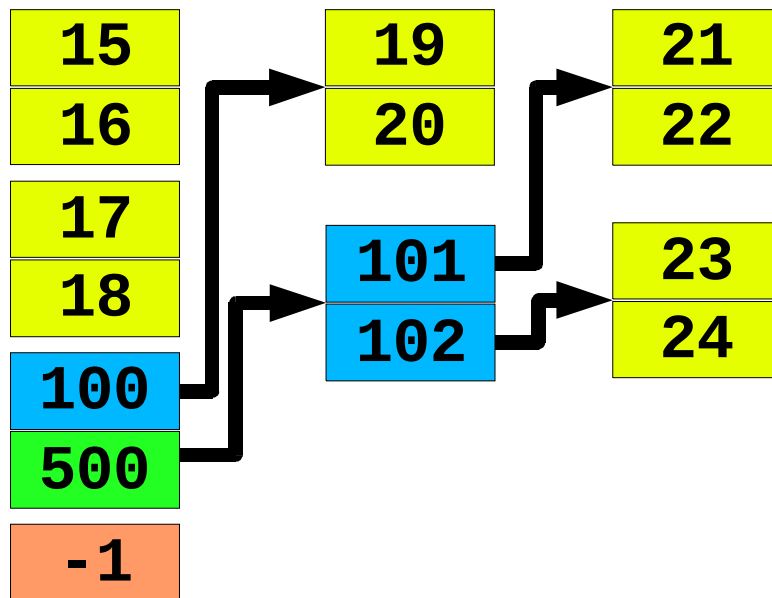

Unix Index Blocks

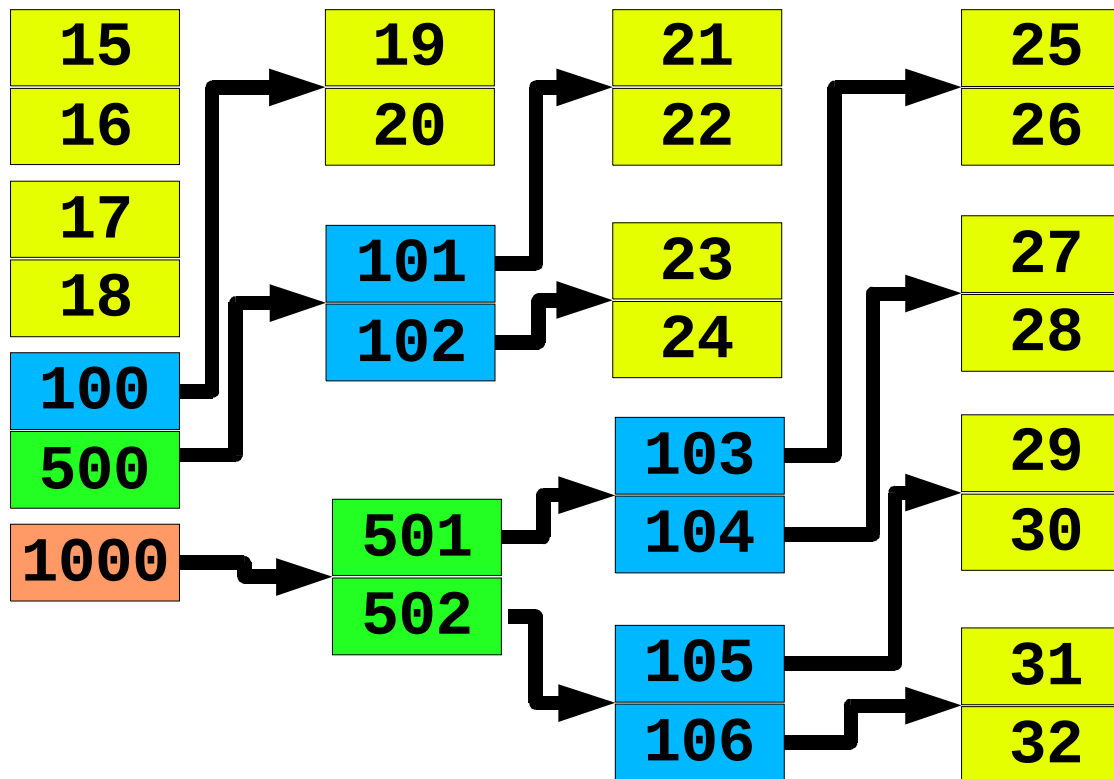

Triple indirect can address $\gg 2^{32}$ bytes

Tracking Free Space

Bit-vector

- 1 bit per block: boolean “free”
- Check each word vs. 0
- Use “first bit set” instruction
- Text example
 - 1.3 GB disk, 512 B sectors: 332 KB bit vector

Need to keep (much of) it in RAM

Tracking Free Space

Linked list?

- Superblock points to first free block
- Each free block points to next

Cost to allocate N blocks is linear

- Free block can point to *multiple* free blocks
 - 512 bytes = 128 (4-byte) block numbers
- FAT approach provides free-block list “for free”

Keep free-*extent* lists

- (block, sequential-block-count)

Unified Buffer Cache

Traditional two-cache approach

- Page cache, file-system cache often totally independent
 - Page cache chunks according to hardware page size
 - File cache chunks according to “file system block” size
 - Different code, different RAM pools
- How much RAM to devote to each one?

Observation

- Why not have just one cache?
 - Mix automatically varies according to load
 - » “cc” wants more disk cache
 - » Firefox wants more VM cache

Unified Buffer Cache - Warning!

“Virtual memory architecture in SunOS”

Gingell, Moran, & Shannon

USENIX 1987 Summer Conference

“The work has consumed approximately four man-years of effort over a year and a half of real time. A surprisingly large amount of effort has been drained by efforts to interpose the VM system as the logical cache manager for the file systems...”

Cache tricks

Read-ahead

```
for (i = 0; i < filesize; ++i)
    putc(getc(infile), outfile);
```

- System observes sequential reads
 - File block 0, 1, 2, ...
 - Can pipeline reads to overlap “computation”, read latency
 - » Request for block 2 triggers disk read of block 3

Free-behind

- Discard buffer from cache when next is requested
- Good for large files
- “Anti-LRU”

Recovery

System crash...now what?

- Some RAM contents were lost
- Free-space list on disk may be wrong
- Scan file system
 - Check invariants
 - » Unreferenced files
 - » Double-allocated blocks
 - » Unallocated blocks
 - Fix problems
 - » Expert user???

Modern approach

- “Journal” changes (see upcoming Transactions lecture)

Backups

Incremental approach

- Monthly: dump entire file system
- Weekly: dump changes since last monthly
- Daily: dump changes since last weekly

Merge approach - www.teradactyl.com

- Collect changes since yesterday
 - Scan file system by modification time
- Two tape drives merge yesterday's tape, today's delta

Summary

Block-mapping problem

- Similar to virtual-to-physical mapping for memory
- Large, often-sparse “address” spaces
 - “Holes” not the common case, but not impossible
- Map any “logical address” to any “physical address”
- Key difference: file maps often don't fit in memory

“Insert a level of indirection”

- Multiple file system types on one machine
- Grow your block-allocation map
- ...