15-410

"Strangers in the night..."

Synchronization #2
Jan. 30, 2004

Dave Eckhardt

Bruce Maggs

Synchronization

Project 0 feedback progress

- Red ink on paper: available yesterday afternoon
  - Going over yours is important
  - Code quality not part of the P0 grade
  - *Will* be part of P1 grade
    - "Don't make me stop the car..."
- Test results (score)
  - Will appear in 410/usr/$USER/grades/p0

Outline

Last time

- Two building blocks
- Three requirements for mutual exclusion
- Algorithms people *don't* use for mutual exclusion

Today

- Ways to *really* do mutual exclusion

Monday

- Inside voluntary descheduling

Wednesday

- Project 2 – thread library

Mutual Exclusion: Reminder

Protects an atomic instruction sequence

- Do "something" to guard against
  - CPU switching to another thread
  - Thread running on another CPU

Assumptions

- Atomic instruction sequence will be “short”
- No other thread “likely” to compete

Mutual Exclusion: Goals

Typical case (no competitor) should be fast

Atypical case can be slow

- **Should not be "too wasteful"**

Interfering Code Sequences

Customer	*Delivery*
`cash = store->cash;`	`cash = store->cash;`
`cash += 50;`	`cash -= 2000;`
`wallet -= 50;`	`wallet += 2000;`
`store->cash = cash;`	`store->cash = cash;`

Which sequences interfere?

"Easy": Customer interferes with Customer

Also: Delivery interferes with Customer

Mutex aka Lock aka Latch

Specify interfering code sequences via *object*

- **Data item(s) "protected by the mutex"**

Object methods encapsulate entry & exit protocols

```
mutex_lock(&store->lock);
cash = store->cash
cash += 50;
personal_cash -= 50;
store->cash = cash;
mutex_unlock(&store->lock);
```

What's inside?

Mutual Exclusion: Atomic Exchange

Intel x86 XCHG instruction

- intel-isr.pdf page 754

xchg (%esi), %edi

```
int32 xchg(int32 *lock, int32 val) {
  register int old;
  old = *lock; /* bus is locked */
  *lock = val; /* bus is locked */
  return (old);
}
```

Inside a Mutex

Initialization

```
int lock_available = 1;
```

Try-lock

```
i_won = xchg(&lock_available, 0);
```

Spin-wait

```
while (!xchg(&lock_available, 0)
  /* nothing */ ;
```

Unlock

```
xchg(&lock_available, 1); /*expect 0*/
```

Strangers in the Night, Exchanging 0's

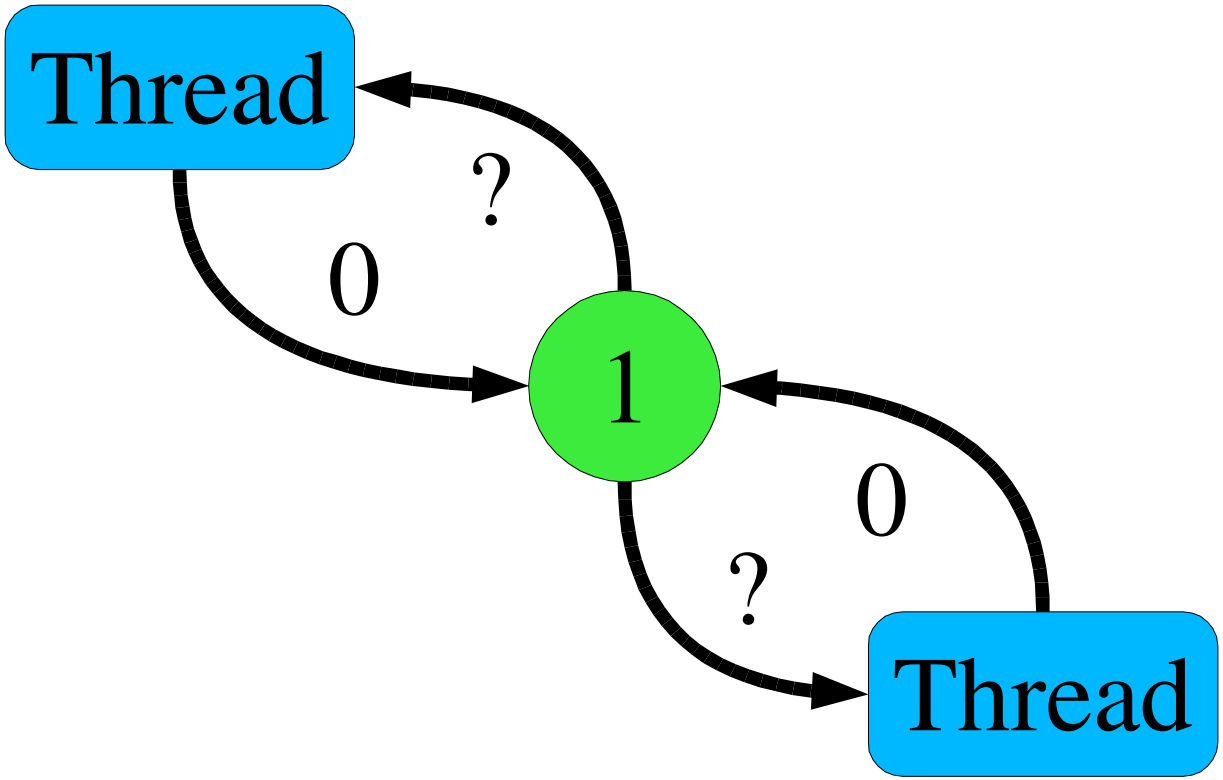

And the winner is...

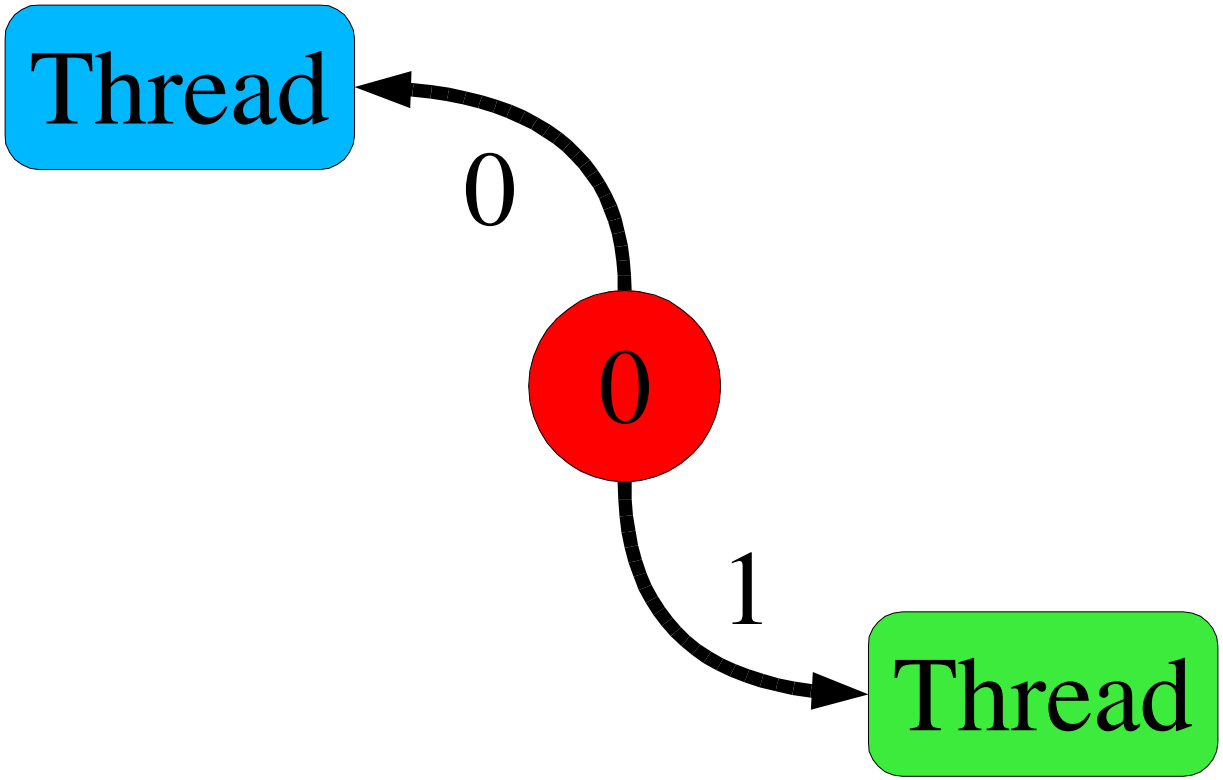

Does it work?

[What are the questions, again?]

Does it work?

Mutual Exclusion

Progress

Bounded Waiting

Does it work?

Mutual Exclusion

- Only one thread can see lock_available == 1

Progress

- Whenever lock_available == 1 a thread will get it

Bounded Waiting

- *No*
- A thread can lose *arbitrarily many times*

Attaining Bounded Waiting

Lock

```
waiting[i] = true;
got_it = false;
while (waiting[i] && !got_it)
  got_it = xchg(&lock_available,
                false);
waiting[i] = false;
```

Attaining Bounded Waiting

Unlock

```
j = (i + 1) % n;
while ((j != i) && !waiting[j])
  j = (j + 1) % n;
  if (j == i)
    xchg(&lock_available, true); /*W*/
  else
    waiting[j] = false;
```

Attaining Bounded Waiting

Versus textbook

- Exchange vs. TestAndSet
- "Available" vs. "locked"
- Atomic release vs. normal memory write
  - Text does "blind write" at point "W"

```
lock_available = true;
```

  - This may be illegal on some machines
  - Unlocker may be *required* to use special memory access
    - Exchange, TestAndSet, etc.

Evaluation

One awkward requirement

One unfortunate behavior

Evaluation

One awkward requirement

- Everybody knows size of thread population
  - Always & instantly!
  - Or uses an upper bound

One unfortunate behavior

- Recall: expect *zero* competitors
- Algorithm: O(n) in *maximum possible* competitors

Is this criticism too harsh?

- After all, Baker's Algorithm has these misfeatures...

Looking Deeper

Look beyond abstract semantics

- Mutual exclusion, progress, bounded waiting

Consider

- Typical access pattern
- Runtime environment

Environment

- Uniprocessor vs. Multiprocessor
  - Who is doing what when we are trying to lock/unlock?
- Threads aren't mysteriously “running” or “not running”
  - Decision made by scheduling algorithm with properties

Uniprocessor Environment

Lock

- What if xchg() didn't work the first time?
- Some other process has the lock
  - That process isn't running (because we are)
  - *xchg() loop is a waste of time*
  - We should let the lock-holder run instead of us

Unlock

- What about bounded waiting?
- When we mark mutex available, who wins next?
  - Whoever *runs* next..only one at a time!
  - How unfair are real OS kernel thread schedulers?
  - How could we fix it if our schedule were unfair???

Multiprocessor Environment

Lock

- Spin-waiting probably justified
  - (why?)

Unlock

- Next xchg() winner "chosen" by memory hardware
- How unfair are real memory controllers?

Test&Set

```
boolean testandset(int32 *lock) {
register boolean old;
  old = *lock;  /* bus is locked */
  *lock = true; /* bus is locked */
  return (old);
}
```

Conceptually simpler than XCHG?

- **Or not**

Load-linked, Store-conditional

For multiprocessors

- "Bus locking considered harmful"

Split XCHG into halves

- *Load-linked(addr)* fetches old value from memory
- *Store-conditional(addr,val)* stores new value back
  - If nobody else stored to that address in between

Load-linked, Store-conditional

```
loop:   LL    $3, mutex_addr
        BEQ   $3, $0, loop     # not avail
        LI    $3, 0            # prep. 0
        SC    $3, mutex_addr   # write 0?
        BEQ   $3, $0, loop     # aborted...
```

Your cache "snoops" the shared memory bus

- **Locking would shut down *all* memory traffic**
- **Snooping allows all traffic, watches for conflicting traffic**
- **Are aborts "ok"? *When* are they "ok"?**

Intel i860 magic lock bit

Instruction sets processor in “lock mode”

- Locks bus
- Disables interrupts

Isn't that dangerous?

- 32-cycle countdown timer triggers unlock
- Exception triggers unlock
- Memory write triggers unlock

Mutual Exclusion: Software

Lamport's "Fast Mutual Exclusion" algorithm

- 5 writes, 2 reads (if no contention)
- Not bounded-waiting (in theory, i.e., if contention)
- http://www.hpl.hp.com/techreports/Compaq-DEC/SRC-RR-7.html

Why not use it?

- What *kind* of memory writes/reads?
- Remember, the computer is "modern"...

Passing the Buck?

Q: Why not ask the OS to provide mutex_lock()?

Easy on a uniprocessor...

- Kernel *automatically* excludes other threads
- Kernel can easily disable interrupts

Kernel has special power on a multiprocessor

- Can issue "remote interrupt" to other CPUs

So why *not* rely on OS?

Passing the Buck

A: Too expensive

- Because... (you know this song!)

Mutual Exclusion: *Tricky* Software

Fast Mutual Exclusion for Uniprocessors

- Bershad, Redell, Ellis: ASPLOS V (1992)

Want uninterruptable instruction sequences?

- **Pretend!**

```
scash = store->cash;
scash += 10;
wallet -= 10;
store->cash = scash;
```

- **Uniprocessor: interleaving requires thread switch...**
- **Short sequence *almost always* won't be interrupted...**

How can that work?

Kernel *detects* "context switch in atomic sequence"

- Maybe a small set of instructions
- Maybe particular memory areas
- Maybe a flag

```
no_interruption_please = 1;
```

Kernel *handles* unusual case

- Hand out another time slice? (Is that ok?)
- Hand-simulate unfinished instructions (yuck?)
- "Idempotent sequence": slide PC back to start

Summary

Atomic instruction sequence

- Nobody else may interleave same/"related" sequence

Specify interfering sequences via *mutex object*

Inside a mutex

- Last time: race-condition memory algorithms
- Atomic-exchange, Compare&Swap, Test&Set, ...
- Load-linked/Store-conditional
- Tricky software, weird software

Mutex strategy

- How should you behave given runtime environment?