

# Principles of Software Construction: Objects, Design, and Concurrency

## Part 3: Concurrency

### Introduction to concurrency

**Charlie Garrod**

**Bogdan Vasilescu**

# Administrivia

- Homework 5 team sign-up deadline tonight
  - Team sizes, presentation slots...
- Midterm exam in class Thursday (29 March)
  - Review session Wednesday, 28 March, 5-7 p.m. in MM A14
- Next required reading due Tuesday
  - Java Concurrency in Practice, Sections 11.3 and 11.4
- Informal course feedback
- Homework 5 frameworks discussion

# Key concepts from last Thursday

# Key design principle: Information hiding

- "When in doubt, leave it out."

# Minimize mutability

- Classes should be immutable unless there's a good reason to do otherwise
  - Advantages: simple, thread-safe, reusable
    - See `java.lang.String`
  - Disadvantage: separate object for each value
- Mutable objects require careful management of visibility and side effects
  - e.g. `Component.getSize()` returns a mutable `Dimension`
- Document mutability
  - Carefully describe state space

# Fail fast

- Report errors as soon as they are detectable
  - Check preconditions at the beginning of each method
  - Avoid dynamic type casts, run-time type-checking

```
// A Properties instance maps Strings to Strings
public class Properties extends Hashtable {
    public Object put(Object key, Object value);

    // Throws ClassCastException if this instance
    // contains any keys or values that are not Strings
    public void save(OutputStream out, String comments);
}
```

# Avoid behavior that demands special processing

- Do not return `null` to indicate an empty value
  - e.g., Use an empty `Collection` or array instead
- Do not return `null` to indicate an error
  - Use an exception instead

# Throw exceptions only for exceptional behavior

- Do not force client to use exceptions for control flow:


```
private byte[] a = new byte[CHUNK_SIZE];

void processBuffer (ByteBuffer buffer) {
    try {
        while (true) {
            buffer.get(a);
            ...
        }
    } catch (BufferUnderflowException e) {
        int remaining = buffer.remaining();
        buffer.get(a, 0, remaining);
        ...
    }
}
```

- Conversely, don't fail silently:

```
ThreadGroup.enumerate(Thread[] list)
```

# Context: The exception hierarchy in Java

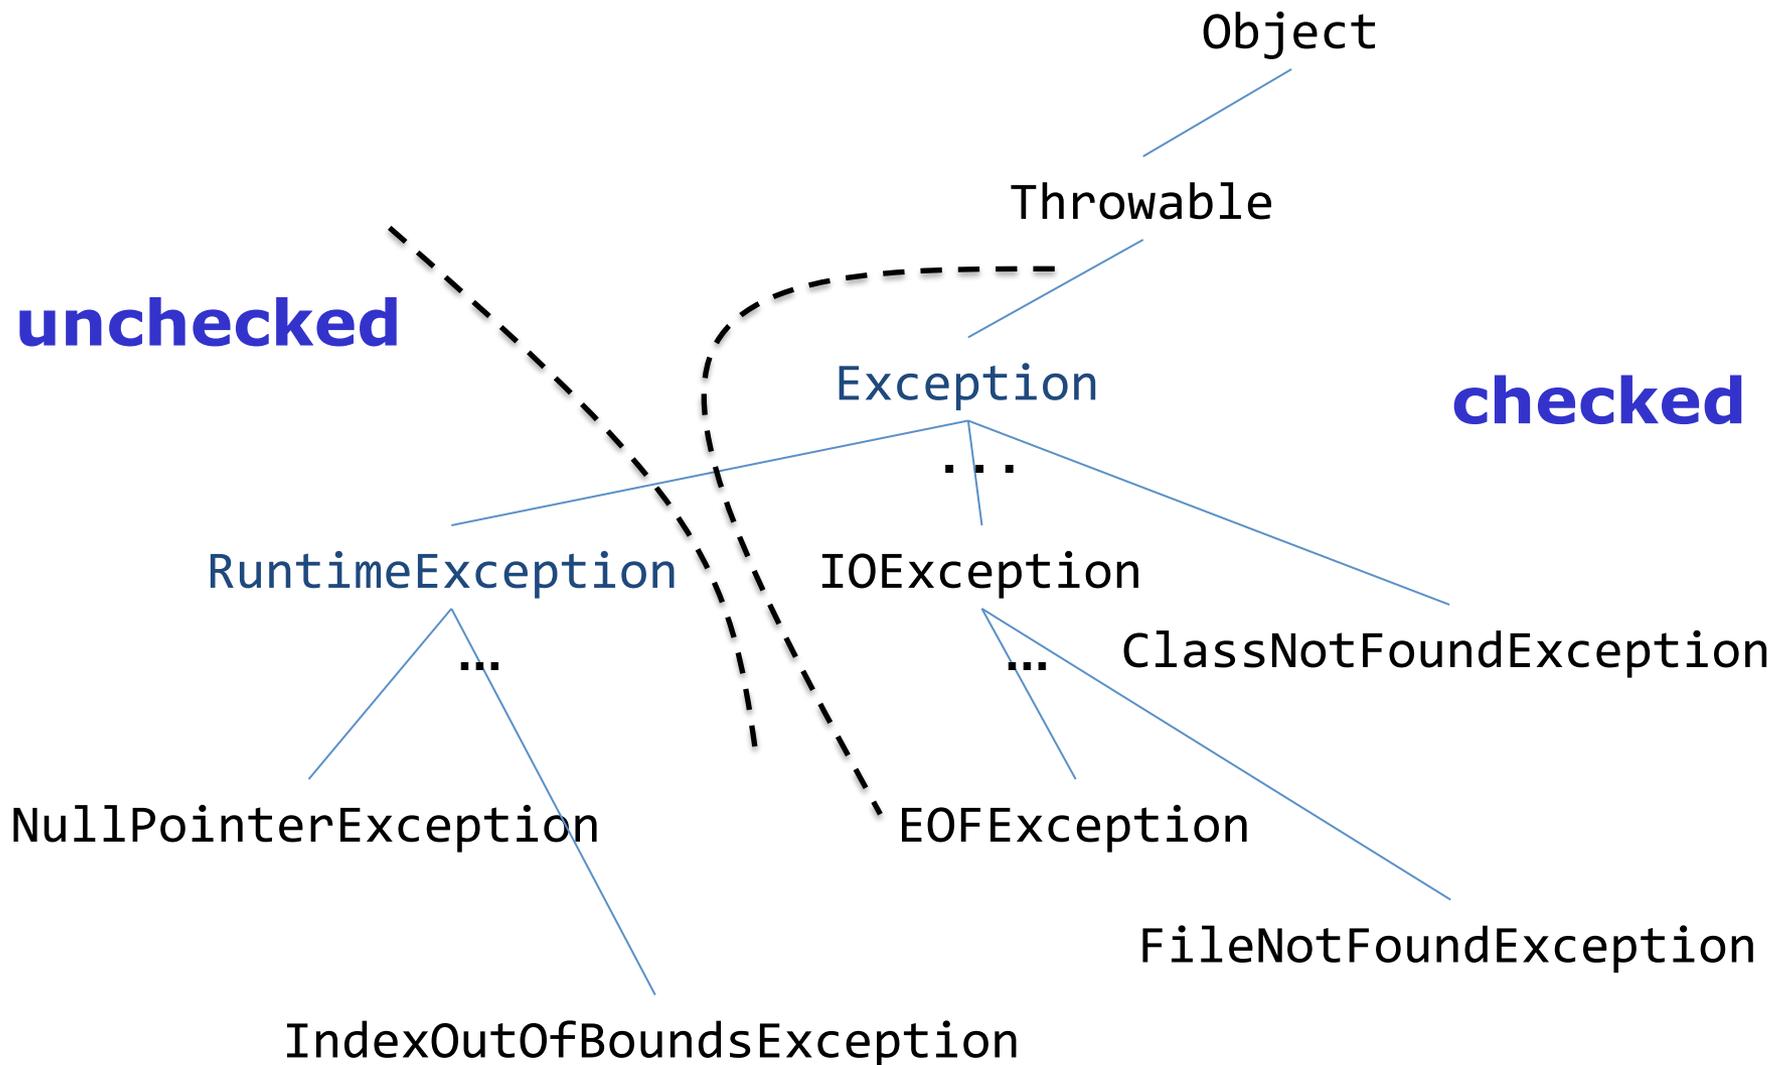

# Avoid checked exceptions, if possible

- Overuse of checked exceptions causes boilerplate code:

```
try {  
    Foo f = (Foo) g.clone();  
} catch (CloneNotSupportedException e) {  
    // This exception can't happen if Foo is Cloneable  
    throw new AssertionError(e);  
}
```

# Don't make the client do anything the module could do

- Carelessly written APIs force clients to write boilerplate code:

```
import org.w3c.dom.*;
import java.io.*;
import javax.xml.transform.*;
import javax.xml.transform.dom.*;
import javax.xml.transform.stream.*;

/** DOM code to write an XML document to a specified output stream. */
static final void writeDoc(Document doc, OutputStream out) throws IOException{
    try {
        Transformer t = TransformerFactory.newInstance().newTransformer();
        t.setOutputProperty(OutputKeys.DOCTYPE_SYSTEM, doc.getDoctype().getSystemId());
        t.transform(new DOMSource(doc), new StreamResult(out)); // Does actual writing
    } catch(TransformerException e) {
        throw new AssertionError(e); // Can't happen!
    }
}
```

# Don't let your output become your de facto API

- Document the fact that output formats may evolve in the future
- Provide programmatic access to all data available in string form

```
org.omg.CORBA.MARSHAL: com.ibm.ws.pmi.server.DataDescriptor; IllegalAccessException minor code: 4942F23E comp
  at com.ibm.rmi.io.ValueHandlerImpl.readValue(ValueHandlerImpl.java:199)
  at com.ibm.rmi.iiop.CDRInputStream.read_value(CDRInputStream.java:1429)
  at com.ibm.rmi.io.ValueHandlerImpl.read_Array(ValueHandlerImpl.java:625)
  at com.ibm.rmi.io.ValueHandlerImpl.readValueInternal(ValueHandlerImpl.java:273)
  at com.ibm.rmi.io.ValueHandlerImpl.readValue(ValueHandlerImpl.java:189)
  at com.ibm.rmi.iiop.CDRInputStream.read_value(CDRInputStream.java:1429)
  at com.ibm.ejs.sm.beans._EJSRemoteStatelessPmiService_Tie._invoke(_EJSRemoteStatelessPmiService_Tie.ja
  at com.ibm.CORBA.iiop.ExtendedServerDelegate.dispatch(ExtendedServerDelegate.java:515)
  at com.ibm.CORBA.iiop.ORB.process(ORB.java:2377)
  at com.ibm.CORBA.iiop.OrbWorker.run(OrbWorker.java:186)
  at com.ibm.ejs.oa.pool.ThreadPool$PooledWorker.run(ThreadPool.java:104)
  at com.ibm.ws.util.CachedThread.run(ThreadPool.java:137)
```

# Don't let your output become your de facto API

- Document the fact that output formats may evolve in the future
- Provide programmatic access to all data available in string form

```
public class Throwable {  
    public void printStackTrace(PrintStream s);  
    public StackTraceElement[] getStackTrace(); // since 1.4  
}
```

```
public final class StackTraceElement {  
    public String getFileName();  
    public int getLineNumber();  
    public String getClassName();  
    public String getMethodName();  
    public boolean isNativeMethod();  
}
```

# API design summary

- Accept the fact that you, and others, will make mistakes
  - Use your API as you design it
  - Get feedback from others
  - Hide information to give yourself maximum flexibility later
  - Design for inattentive, hurried users
  - Document religiously

# Semester overview

- Introduction to Java and O-O
- Introduction to **design**
  - **Design** goals, principles, patterns
- **Designing** classes
  - **Design** for change
  - **Design** for reuse
- **Designing** (sub)systems
  - **Design** for robustness
  - **Design** for change (cont.)
- **Design** case studies
- **Design** for large-scale reuse
- **Explicit concurrency**
- Crosscutting topics:
  - Modern development tools: IDEs, version control, build automation, continuous integration, static analysis
  - Modeling and specification, formal and informal
  - Functional correctness: Testing, static analysis, verification

# Today: Concurrency, motivation and primitives


- The backstory
  - Motivation, goals, problems, ...
- Concurrency primitives in Java
- Coming soon (not today):
  - Higher-level abstractions for concurrency
  - Program structure for concurrency
  - Frameworks for concurrent computation

# Power requirements of a CPU

- Approx.: **Capacitance** \* **Voltage<sup>2</sup>** \* **Frequency**
- To increase performance:
  - More transistors, thinner wires
    - More power leakage: **increase V**
  - Increase clock frequency **F**
    - Change electrical state faster: **increase V**
- *Dennard scaling*: As transistors get smaller, power density is approximately constant...
  - ...until early 2000s
- Heat output is proportional to power input

# One option: fix the symptom

- Dissipate the heat

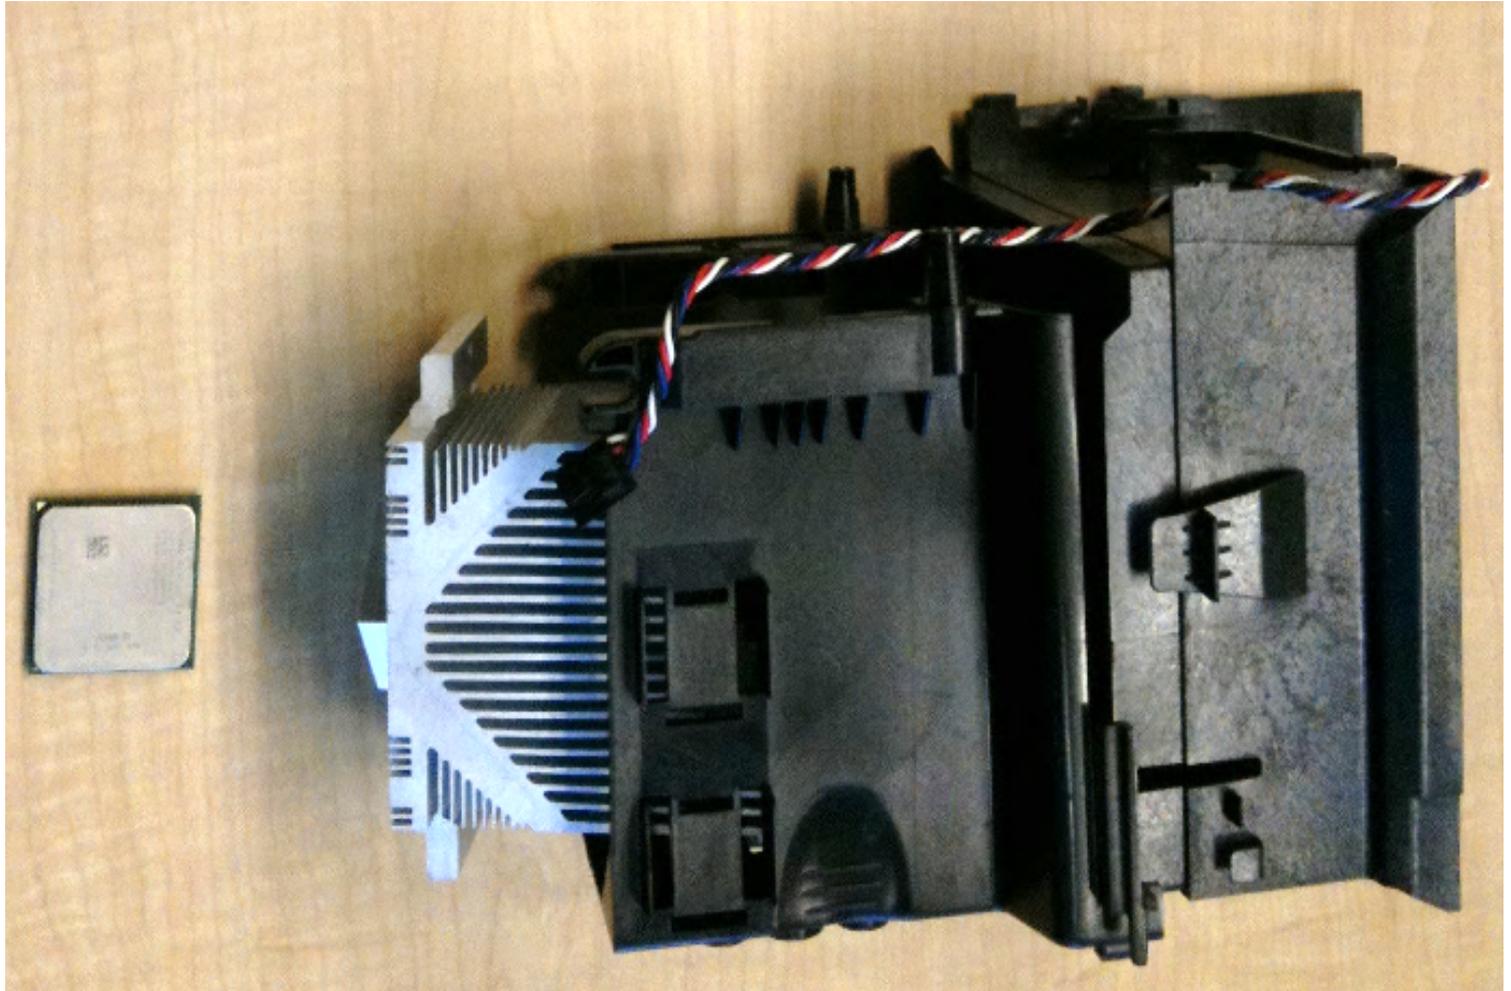


# One option: fix the symptom

- Better: Dissipate the heat with liquid nitrogen
  - Overclocking by Tom's Hardware's 5 GHz project



<http://www.tomshardware.com/reviews/5-ghz-project,731-8.html>

# Processor characteristics over time

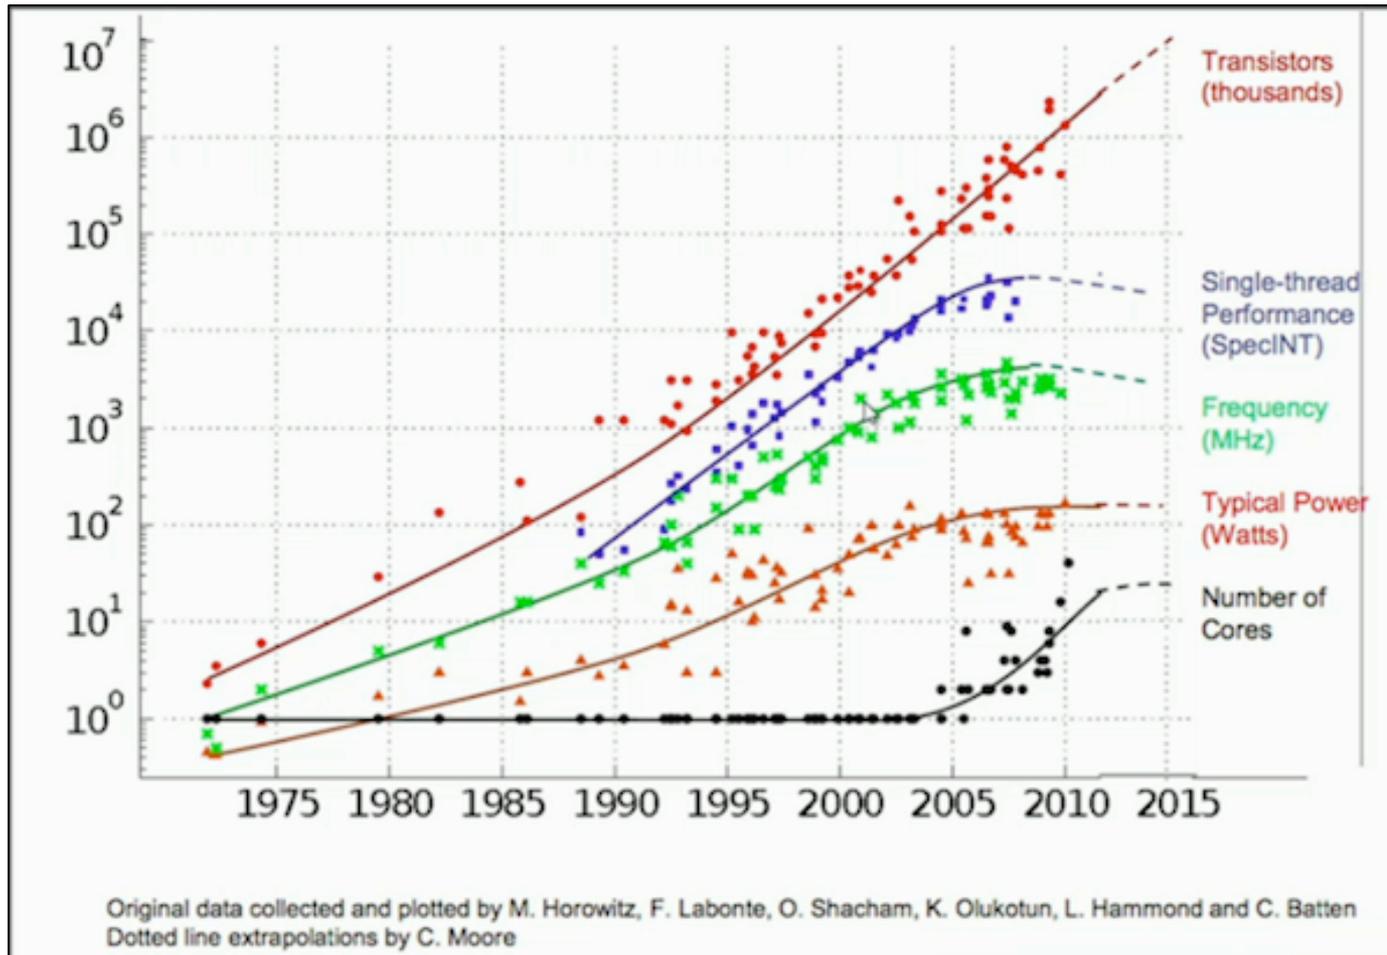

# Concurrency then and now


- In the past, multi-threading just a convenient abstraction
  - GUI design: event dispatch thread
  - Server design: isolate each client's work
  - Workflow design: isolate producers and consumers
- Now: required for scalability and performance

# We are all concurrent programmers

- Java is inherently multithreaded
- To utilize modern processors, we must write multithreaded code
- Good news: a lot of it is written for you
  - Excellent libraries exist (`java.util.concurrent`)
- Bad news: you still must understand fundamentals
  - ...to use libraries effectively
  - ...to debug programs that make use of them

## Aside: Concurrency vs. parallelism, visualized

- Concurrency without parallelism:

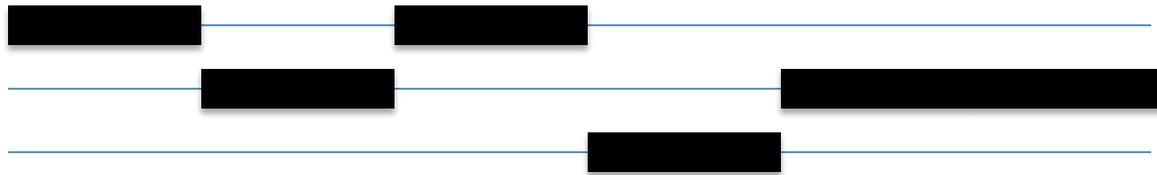

- Concurrency with parallelism:



# Basic concurrency in Java

- An interface representing a task

```
public interface Runnable {  
    void run();  
}
```

- A class to execute a task in a thread

```
public class Thread {  
    public Thread(Runnable task);  
    public void start();  
    public void join();  
    ...  
}
```

## Example: Money-grab (1)

```
public class BankAccount {
    private long balance;

    public BankAccount(long balance) {
        this.balance = balance;
    }
    static void transferFrom(BankAccount source,
                            BankAccount dest, long amount) {
        source.balance -= amount;
        dest.balance   += amount;
    }
    public long balance() {
        return balance;
    }
}
```

## Example: Money-grab (2)

```
public static void main(String[] args) throws InterruptedException
{
    BankAccount bugs = new BankAccount(100);
    BankAccount daffy = new BankAccount(100);

    Thread bugsThread = new Thread(()-> {
        for (int i = 0; i < 1_000_000; i++)
            transferFrom(daffy, bugs, 100);
    });

    Thread daffyThread = new Thread(()-> {
        for (int i = 0; i < 1_000_000; i++)
            transferFrom(bugs, daffy, 100);
    });

    bugsThread.start(); daffyThread.start();
    bugsThread.join(); daffyThread.join();
    System.out.println(bugs.balance() + daffy.balance());
}
```



# What went wrong?

- Daffy & Bugs threads had a *race condition* for shared data
  - Transfers did not happen in sequence
- Reads and writes interleaved randomly
  - Random results ensued

# The challenge of concurrency control

- Not enough concurrency control: *safety failure*
  - Incorrect computation
- Too much concurrency control: *liveness failure*
  - Possibly no computation at all (*deadlock* or *livelock*)

# Shared mutable state requires concurrency control

- Three basic choices:
  1. Don't mutate: share only immutable state
  2. Don't share: isolate mutable state in individual threads
  3. If you must share mutable state: *limit concurrency to achieve safety*


## An easy fix:

```
public class BankAccount {
    private long balance;

    public BankAccount(long balance) {
        this.balance = balance;
    }
    static synchronized void transferFrom(BankAccount source,
                                           BankAccount dest, long amount) {
        source.balance -= amount;
        dest.balance   += amount;
    }
    public synchronized long balance() {
        return balance;
    }
}
```


# Concurrency control with Java's *intrinsic* locks

- `synchronized (lock) { ... }`
  - Synchronizes entire block on object `lock`; cannot forget to unlock
  - Intrinsic locks are *exclusive*: One thread at a time holds the lock
  - Intrinsic locks are *reentrant*: A thread can repeatedly get same lock

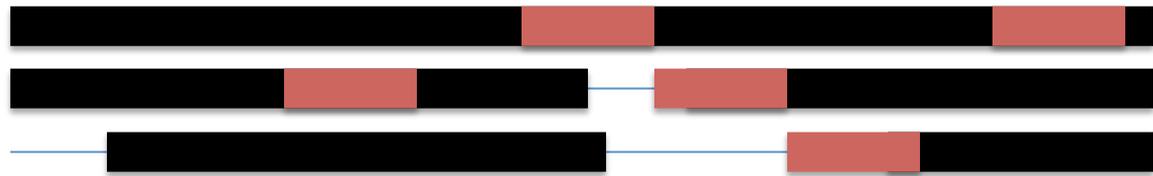

# Concurrency control with Java's *intrinsic* locks

- `synchronized (lock) { ... }`
  - Synchronizes entire block on object `lock`; cannot forget to unlock
  - Intrinsic locks are *exclusive*: One thread at a time holds the lock
  - Intrinsic locks are *reentrant*: A thread can repeatedly get same lock
- `synchronized` on an instance method
  - Equivalent to `synchronized (this) { ... }` for entire method
- `synchronized` on a static method in class `Foo`
  - Equivalent to `synchronized (Foo.class) { ... }` for entire method

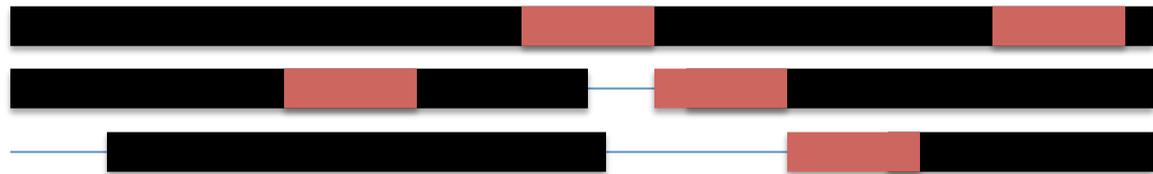

# Summary

- Like it or not, you're a concurrent programmer
- Ideally, avoid shared mutable state
  - If you can't avoid it, synchronize properly