15-252

More Great Ideas in Theoretical Computer Science

Course pages

http://www.cs.cmu.edu/~venkatg/teaching/15252-sp20/

piazza.com/cmu/spring2020/15252

Course Staff

Venkatesan Guruswami

Sai Sandeep

Office hours

Venkat: Thur 11am-12noon
Sandeep: Fri 11am-12noon

Other times available upon request

Topics

- Mix of digging into more advanced version of 251 material, and some one-off topics.
- Happy to customize to some extent.
  The course is for your fun and intellectual enrichment.
- Feedback (on topics, level, speed, etc.) always welcomed.

Grading (Pass/Fail)

Class participation + Homeworks

- Weekly homework, one per lecture (roughly)
- Each with couple of problems (sometimes tricky)
- HW must be typeset in LaTeX.
- Collaboration and other rules specified in HW

Feature Presentation

Pancake Sorting

Feel free to ask questions

The chef in our place is sloppy; when he prepares pancakes they come out all different sizes.

When the waiter delivers them to a customer, he rearranges them
(so that the smallest is on top, and so on, down to the largest at the bottom).

He does this by grabbing several from the top and flipping them over, repeating this (varying the number he flips) as many times as necessary.

How do we sort this stack?
How many flips do we need?



How do we sort this stack?
How many flips do we need?



How do we sort this stack?
How many flips do we need?

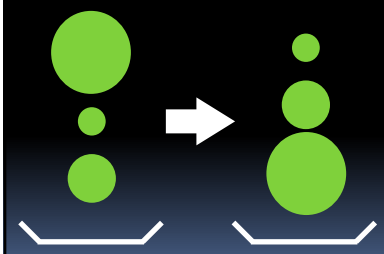

2 flips sufficient
2 flips necessary

How do we sort this stack?
How many flips do we need?

Developing Notation:
Turning pancakes into numbers

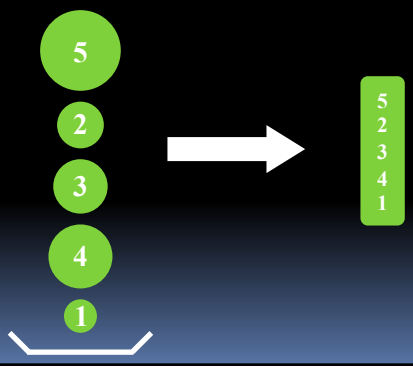

How do we sort this stack?
How many flips do we need?

5
2
3
4
1

4 flips are sufficient

Best way to sort this stack?

Let **X** be the smallest number of flips that can sort this specific stack.

5
2
3
4
1

Lower Bound

$? \leq X \leq 4$

Upper Bound

Is 4 a lower bound? What would it take it show that?

A convincing argument that **every** way of sorting the stack uses at least 4 flips.

5 2 3 4 1

Lower Bound

$? \leq X \leq 4$

Upper Bound

Four Flips Are Necessary

5 2 3 4 1 → 1 4 3 2 5 → 4 1 3 2 5

If we could do it in three flips:

First flip has to put 5 on bottom, because…

Second flip has to bring 4 to the top, because…

Best way to sort?

Let **X** be the smallest number of flips that can sort this specific stack.

5 2 3 4 1

Lower Bound

$4 \leq X \leq 4$

Upper Bound

$X = 4$

Matching upper and lower bounds!



Lower Bound

$4 \leq X \leq 4$

Upper Bound

$X = 4$

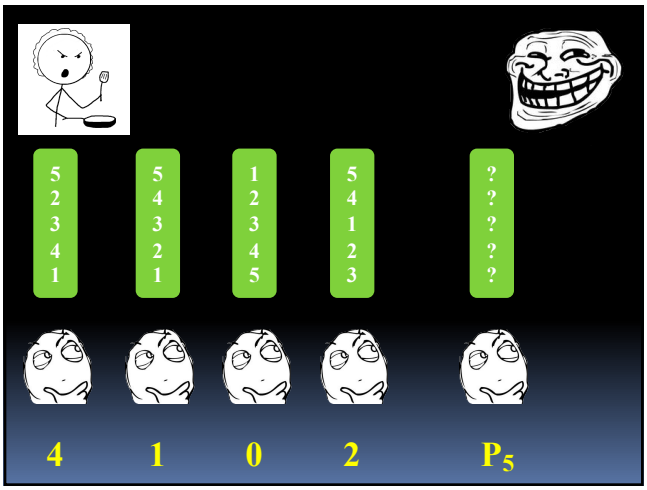

5th Pancake Number

$P_5 =$ Number of flips required to sort when your worst enemy gives you a stack of 5 pancakes

$P_5 =$ MAX over all 5-stacks **S** of MIN # of flips to sort **S**

5th Pancake Number

Lower Bound

$4 \le P_5 \le ?$

Upper Bound

Fact: $P_5 = 5$

To show $P_5 \ge 5$?

1. Show a **specific** 5-stack.
2. Argue that every way of sorting **this** stack uses at least 5 flips.

To show $P_5 \le 5$?

Give a way of sorting **every** 5-stack using at most 5 flips.

What is P_n for small n?

Can you do n = 0, 1, 2, 3 ?

n	0	1	2	3
P_n	0	0	1	3

$P_3 = 3$

To show $P_3 \geq 3$?

1. Show a **specific** 3-stack.
2. Argue that every way of sorting **this** stack uses at least 3 flips.

1
3
2

To show $P_3 \leq 3$?

Give a way of sorting **every** 3-stack using at most 3 flips.

- Biggest one to bottom using ≤ 2 flips.
- Smallest one to top using ≤ 1 flip.

n^{th} Pancake Number

Lower Bound

$? \leq P_n \leq ?$

Upper Bound

"What is the best upper bound and lower bound I can prove?"

n^{th} Pancake Number

$P_n \leq ?$

Upper Bound

Let's start by thinking about an upper bound.

Upper Bound on P_n

Fix the biggest pancake.

? ? ? ? ? ? ? ? ? ?

n

Upper Bound on P_n

Fix the biggest pancake.

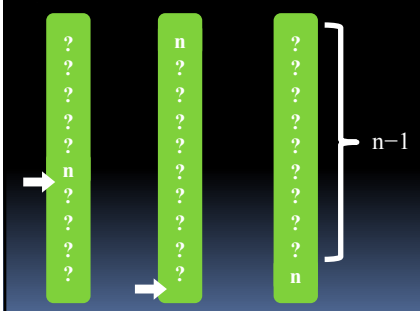

Upper Bound on P_n



Fix pancake #n
≤ 2 flips

Fix pancake #n−1
≤ 2 flips

Fix pancake #n−2
≤ 2 flips

…

Fix pancake #3
≤ 2 flips

Fix pancake #2
≤ 2 flips

≤ 2n−2

Upper Bound on P_n

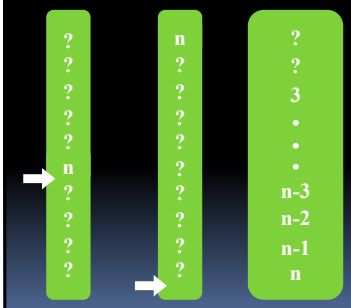

Fix pancake #n
≤ 2 flips

Fix pancake #n−1
≤ 2 flips

Fix pancake #n−2
≤ 2 flips

…

Fix pancake #3
≤ 2 flips

Fix pancake #2
≤ 1 flip

≤ 2n−3

Upper Bound on P_n

Bring-To-Top Method

shows $P_n \leq 2n-3$

assuming $n \geq 2$.

Fix pancake #n
≤ 2 flips

Fix pancake #n−1
≤ 2 flips

Fix pancake #n−2
≤ 2 flips

…

Fix pancake #3
≤ 2 flips

Fix pancake #2
≤ 1 flip

≤ 2n−3

$? \leq P_n \leq 2n-3$



Let's think about a lower bound for P_n

1. Show a **specific** n-stack.
2. Argue that every way of sorting **this** stack uses a lot of flips.

Lower Bound on P_n



This stack seems pretty painful!

Breaking-Apart Argument

Suppose the stack has an adjacent pair which should not be adjacent in the end.

Spatula must go between them at least once.

("Adjacent pair" includes bottom pancake and the plate.)

Each flip can achieve at most 1 "break-apart".

Proof of $P_n \geq n$

S

Case 1: n is even.

S contains n adjacent pairs which need to be broken apart, each necessitating at least one flip.

Detail: Assuming n > 4.

Proof of $P_n \geq n$

S

n-1
•
•
•
6
4
2
n
•
•
•
5
3
1

Case 2: n is odd.

S contains n adjacent pairs which need to be broken apart, each necessitating at least one flip.

Detail: Assuming n > 3.

2
3
1

$$n \leq P_n \leq 2n-3$$

(for n > 2)

Lower Bound

Upper Bound

Upper and lower bounds are within a factor of 2.



Slight Digression

From **any** n-stack to **sorted** n-stack in $\leq P_n$

From **sorted** n-stack to **any** n-stack in $\leq P_n$?

Reverse the sequence of flips used to sort!

Hence: **any** n-stack to **any** n-stack in $\leq 2P_n$

Is there a better way?

Any Stack S to **Any** Stack T in $\leq P_n$

S: 4,3,5,1,2

3,4,1,2,5

"new S"

T: 5,1,4,3,2

1,2,3,4,5

Rename the pancakes in T to be 1,2,3,…,n

Rewrite S using the new naming scheme

In $\leq P_n$ flips can sort "new S".

The same sequence of flips also brings S to T.

The Known Pancake Numbers

n	P_n
1	0
2	1
3	3
4	4
5	5
6	7
7	8
8	9
9	10
10	11
11	13
12	14
13	15
14	16
15	17
16	18
17	19
18	20
19	22

P_{20} is unknown

It is either 23 or 24, we don't know which.

20•19•18•···•2•1 = 20! possible 20-stacks

$$20! = 2.43 \times 10^{18}$$

(2.43 exa-pancakes)

Brute-force analysis would take forever!

Is This Really Computer Science?

Posed in *Amer. Math. Monthly* 82(1), 1975,
by "Harry Dweighter" (haha).

AKA **Jacob Goodman**,
a computational geometer.

In 1977,
the observations we have made so far
were published by
Mike Garey, David Johnson, & Shen Lin





Bounds For
Sorting By Prefix Reversal

Discrete Mathematics 27(1), 1979

$(17/16)n \leq P_n \leq (5/3)n+5/3$

by:
William H. Gates (Microsoft, Albuquerque NM)
Christos Papadimitriou (UC Berkeley)


upper bound also
by Győri & Turán

"On the Diameter of the Pancake Network"
Journal of Algorithms 25(1), 1997

$(15/14)n \leq P_n \leq (5/3)n+5/3$

by Hossain Heydari and Hal Sudborough


"An (18/11)n Upper Bound For Sorting By Prefix Reversals"
Theoretical Computer Science 410(36), 2009

$(15/14)n \leq P_n \leq (18/11)n$

by B. Chitturi, W. Fahle, Z. Meng, L. Morales,
C.O. Shields, I.H. Sudborough, W. Voit
@ UT Dallas

Worst Case: There is an algorithm using ≤ (18/11)n flips, even when your worst enemy gives you stack of n pancakes

Average Case: There is an algorithm using ≤ (17/12)n flips on average when given a random stack of n pancakes



(Josef Cibulka, 2009)

Burnt Pancakes

$$(3/2)n-1 \leq BP_n \leq 2n+3$$

Burnt Pancakes

$$(3/2)n \leq BP_n \leq 2n-2$$

"On The Problem Of Sorting Burnt Pancakes"
Discrete Applied Math. 61(2), 1995

by David X. Cohen and Manuel Blum

Applications

"The Pancake Network"

on n! nodes

Nodes are named after the n! different stacks of n pancakes

Put a link between two nodes if you can go between them with one flip

Pancake Network, n = 3



Pancake Network, n = 4

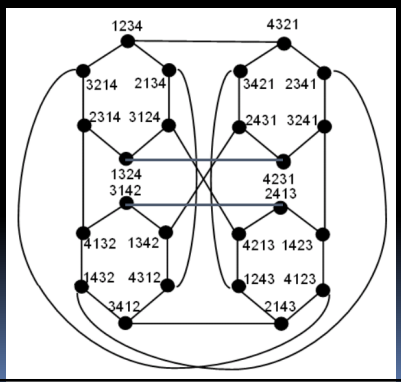

Pancake Network: Message Routing Delay



What is the maximum distance between two nodes in the pancake network?

P_n

Pancake Network: Reliability

If up to n−2 nodes get hit by lightning, the network remains connected, even though each node is connected to only n−1 others

The Pancake Network is **optimally** reliable for its number of nodes and links

Computational Biology

Transforming Cabbage Into Turnip:
polynomial algorithm for sorting signed permutations by reversal
by S. Hannenhalli & P. Pevzner

Of Mice And Men:
algorithms for evolutionary distances between genomes with translocation
by J. Kececioglu and R. Ravi

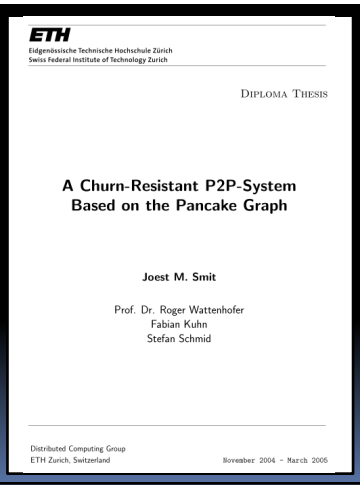

ETH
Eidgenössische Technische Hochschule Zürich
Swiss Federal Institute of Technology Zurich

Diploma Thesis

A Churn-Resistant P2P-System Based on the Pancake Graph

Joest M. Smit

Prof. Dr. Roger Wattenhofer
Fabian Kuhn
Stefan Schmid

Distributed Computing Group
ETH Zurich, Switzerland

November 2004 – March 2005

Lessons

- Simple puzzles might be hard to solve and hold exciting mysteries
- Simple puzzles can have unforeseen applications
- By studying pancakes (theory puzzles) you may become a billionaire

Analogy with computation

- *Input*: initial stack
- *Output*: sorted stack
- *Computational problem*: (input, output) pairs
  pancake sorting problem
- *Computational model*: specified by allowed operations on input *(flip top segment of stack)*
- *Algorithm*: a precise description of how to obtain output from input *(precise sequence of flips)*
- Computability: is it always possible to sort the stack?
- Complexity: how many operations (flips) are needed?

High Level Point

Computer Science is not merely

about computers or programming — it is about *mathematically modeling* computational scenarios in our world,

about finding *better and better ways* to solve problems, and

understanding *fundamental limits* of how well we can solve problems

Today's lecture is a microcosm of this.



Study Guide

Definitions of:

- n^{th} pancake number
- upper bound
- lower bound

Proof of:

- Bring-To-Top
- Breaking-Apart
- ANY to ANY in $\leq P_n$

HW 1 will be posted on course webpage by tomorrow.
Due midnight next Friday (Jan 24).