# 15-213

*"The course that gives CMU its Zip!"*

# Exceptional Control Flow Part II
# October 16, 2003

## Topics

- Process Hierarchy
- Shells
- Signals
- Nonlocal jumps

# ECF Exists at All Levels of a System

**Exceptions**

- Hardware and operating system kernel software

**Concurrent processes**

- Hardware timer and kernel software

**Signals**

- Kernel software

**Non-local jumps**

- Application code

Previous Lecture

This Lecture

# The World of Multitasking

## System Runs Many Processes Concurrently

- Process: executing program
  - State consists of memory image + register values + program counter
- Continually switches from one process to another
  - Suspend process when it needs I/O resource or timer event occurs
  - Resume process when I/O available or given scheduling priority
- Appears to user(s) as if all processes executing simultaneously
  - Even though most systems can only execute one process at a time
  - Except possibly with lower performance than if running alone

# Programmer's Model of Multitasking

## Basic Functions

- `fork()` spawns new process
  - Called once, returns twice
- `exit()` terminates own process
  - Called once, never returns
  - Puts it into "zombie" status
- `wait()` and `waitpid()` wait for and reap terminated children
- `execl()` and `execve()` run a new program in an existing process
  - Called once, (normally) never returns

## Programming Challenge

- Understanding the nonstandard semantics of the functions
- Avoiding improper use of system resources
  - E.g. "Fork bombs" can disable a system.

# Unix Process Hierarchy

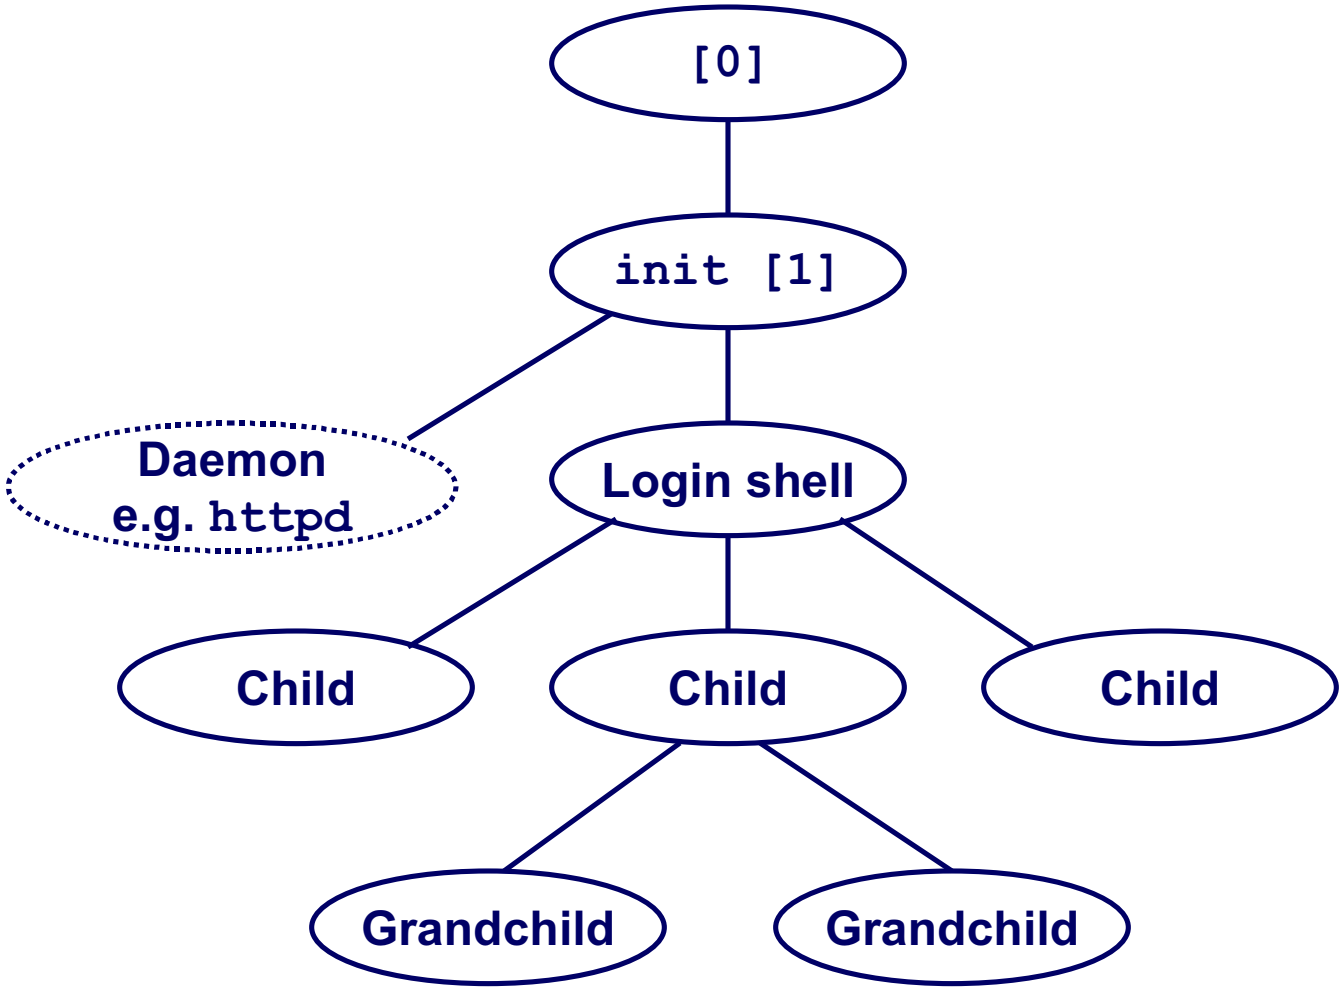

# The ps command

```
Unix> ps aux -w --forest
```

(output edited to fit slide)

```
USER       PID TTY      STAT COMMAND
root         1 ?        S    init [3]
root         2 ?        SW   [keventd]
root         3 ?        SWN  [ksoftirqd_CPU0]
root         4 ?        SW   [kswapd]
root         5 ?        SW   [bdflush]
root         6 ?        SW   [kupdated]
root         9 ?        SW<  [mdrecoveryd]
root        12 ?        SW   [scsi_eh_0]
root       397 ?        S    /sbin/pump -i eth0
root       484 ?        S<   /usr/local/sbin/afsd -nosettime
root       533 ?        S    syslogd -m 0
root       538 ?        S    klogd -2
rpc        563 ?        S    portmap
rpcuser    578 ?        S    rpc.statd
daemon     696 ?        S    /usr/sbin/atd
root       713 ?        S    /usr/local/etc/nanny -init /etc/nanny.conf
mmdf       721 ?        S     \_ /usr/local/etc/deliver -b -csmtpcmu
root       732 ?        S     \_ /usr/local/sbin/named -f
root       738 ?        S     \_ /usr/local/sbin/sshd -D
root       739 ?        S<L   \_ /usr/local/etc/ntpd -n
root       752 ?        S<L   |   \_ /usr/local/etc/ntpd -n
root       753 ?        S<L   |       \_ /usr/local/etc/ntpd -n
root       744 ?        S     \_ /usr/local/sbin/zhm -n zephyr-1.srv.cm
root       774 ?        S    gpm -t ps/2 -m /dev/mouse
root       786 ?        S    crond
```

# The `ps` Command (cont.)

```
USER       PID TTY      STAT COMMAND
root       889 tty1     S    /bin/login -- agn
agn        900 tty1     S     \_ xinit -- :0
root       921  ?       SL        \_ /etc/X11/X -auth /usr1/agn/.Xauthority :0
agn        948 tty1     S         \_ /bin/sh /afs/cs.cmu.edu/user/agn/.xinitrc
agn        958 tty1     S             \_ xterm -geometry 80x45+1+1 -C -j -ls -n
agn        966 pts/0    S             |   \_ -tcsh
agn       1184  pts/0   S             |       \_ /usr/local/bin/wish8.0 -f /usr
agn       1212 pts/0    S             |       |   \_ /usr/local/bin/wish8.0 -f
agn       3346 pts/0    S             |       |   \_ aspell -a -S
agn       1191 pts/0    S             |       \_ /bin/sh /usr/local/libexec/moz
agn       1204 8 pts/0  S             |           \_ /usr/local/libexec/mozilla
agn       1207 8 pts/0  S             |               \_ /usr/local/libexec/moz
agn       1208 8 pts/0  S             |                   |   \_ /usr/local/libexec
agn       1209 8 pts/0  S             |                   |   \_ /usr/local/libexec
agn      17814 8 pts/0  S             |                   |   \_ /usr/local/libexec
agn       2469  pts/0   S             |                   \_  usr/local/lib/Acrobat
agn       2483  pts/0   S             |                   \_ java_vm
agn       2484  pts/0   S             |                       \_ java_vm
agn       2485  pts/0   S             |                           \_ java_vm
agn       3042  pts/0   S             |                           \_ java_vm
agn        959 tty1     S             \_ /bin/sh /usr/local/libexec/kde/bin/sta
agn       1020 tty1     S                 \_ kwrapper ksmserver
```

# Unix Startup: Step 1

1. Pushing reset button loads the `PC` with the address of a small bootstrap program.
2. Bootstrap program loads the boot block (disk block 0).
3. Boot block program loads kernel binary (e.g., `/boot/vmlinux`)
4. Boot block program passes control to kernel.
5. Kernel handcrafts the data structures for process 0.

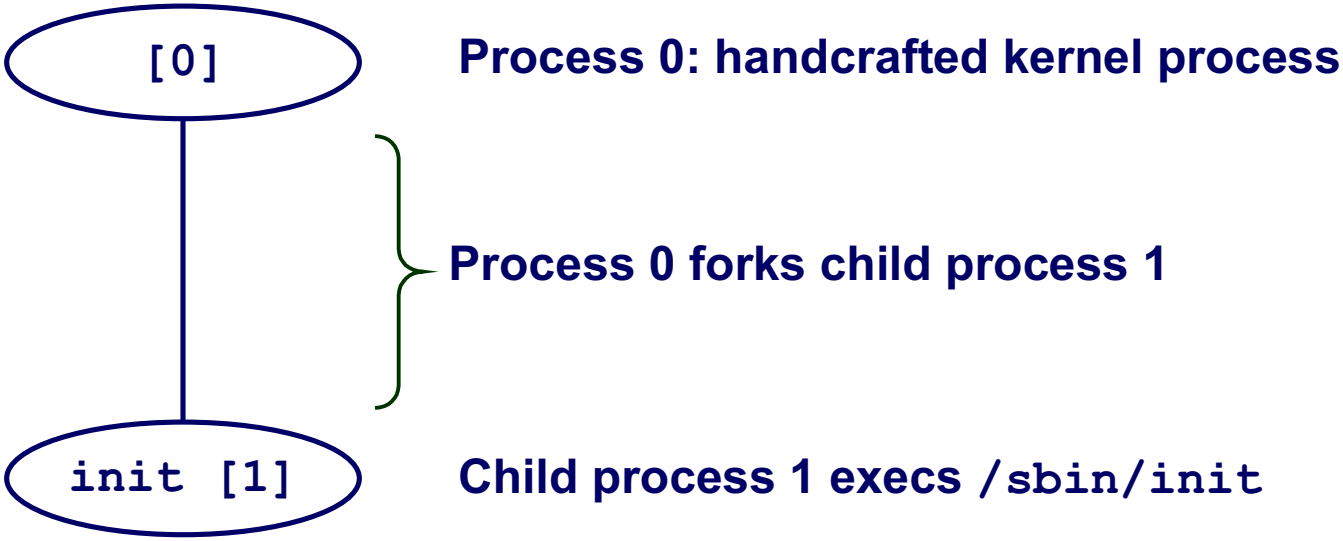

# Some PC Start-up Details

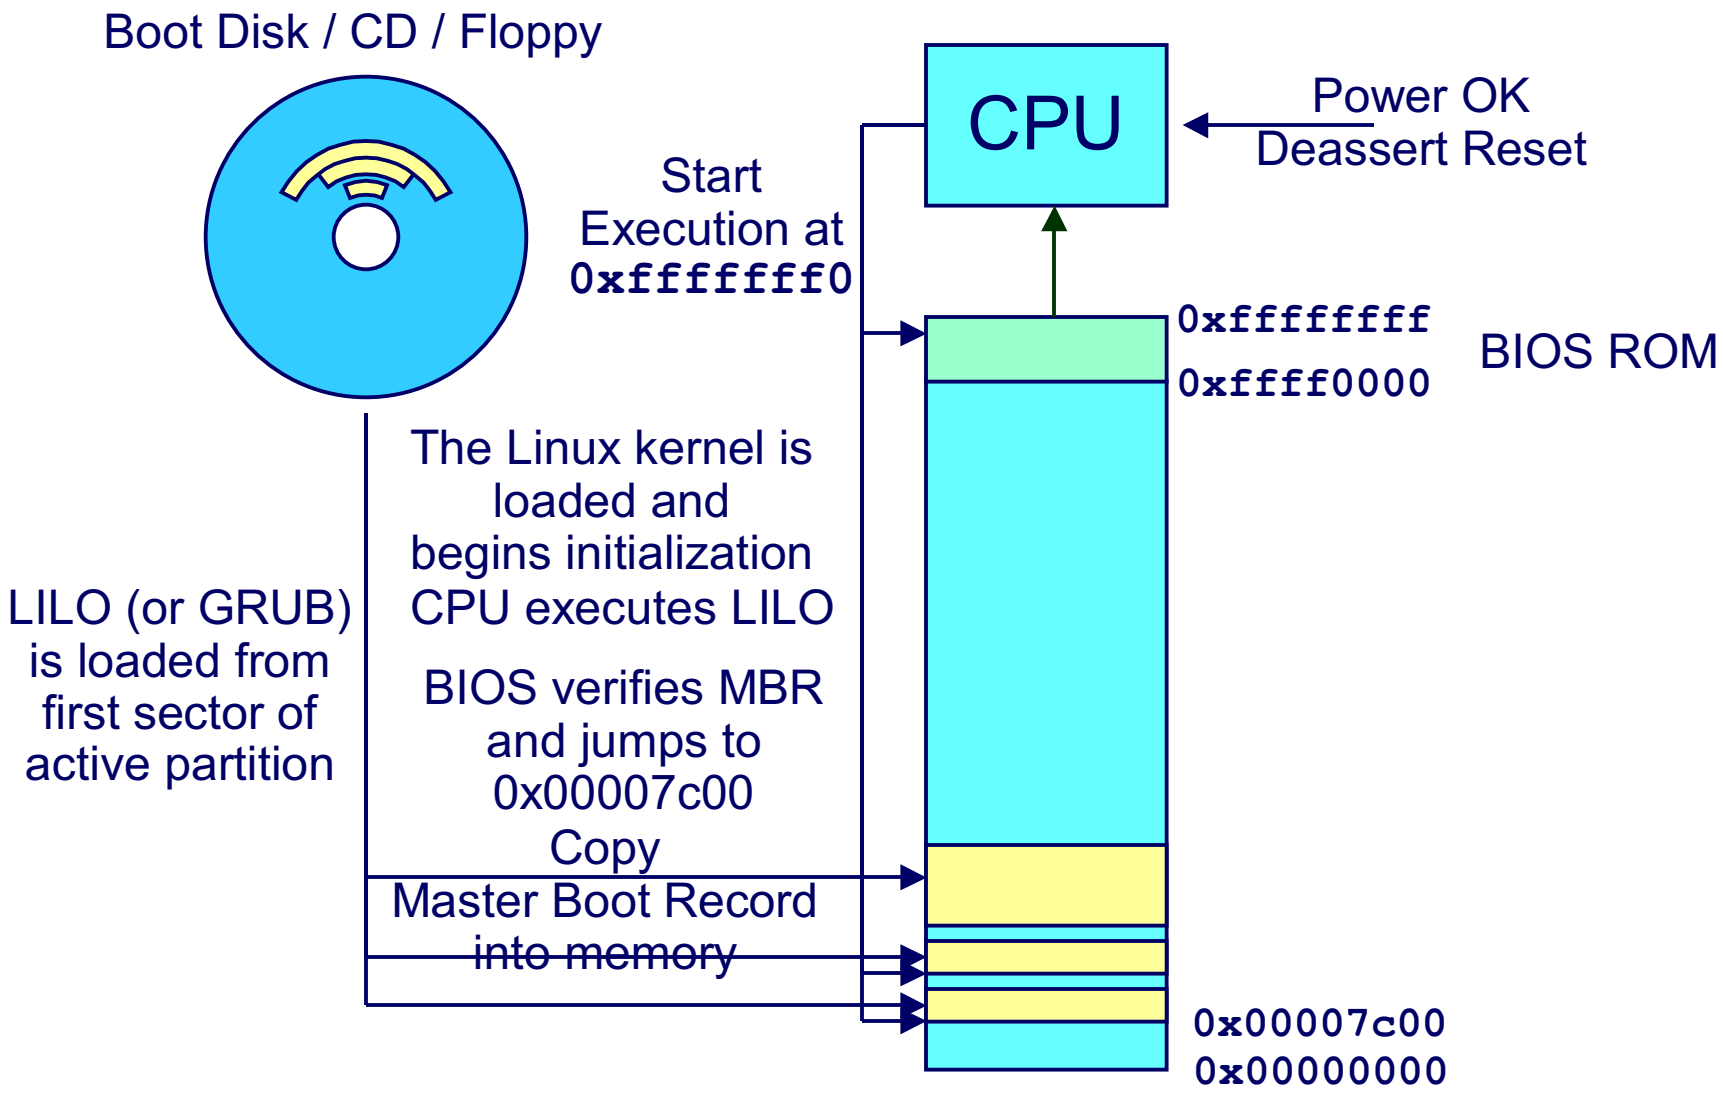

# Unix Startup: Step 2

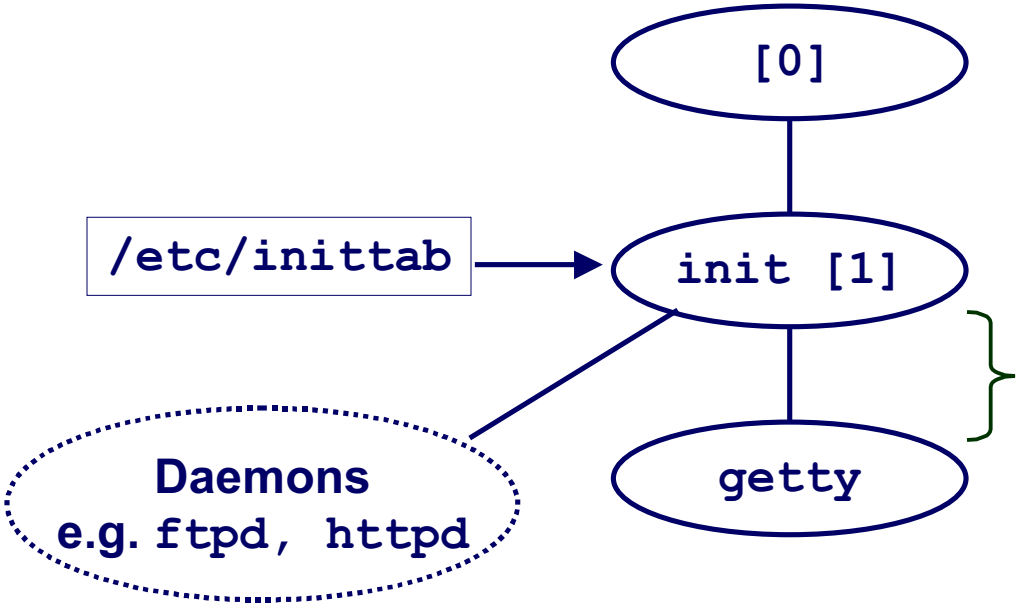


**`init` forks and execs daemons per `/etc/inittab`, and forks and execs a `getty` program for the console**

# Unix Startup: Step 3

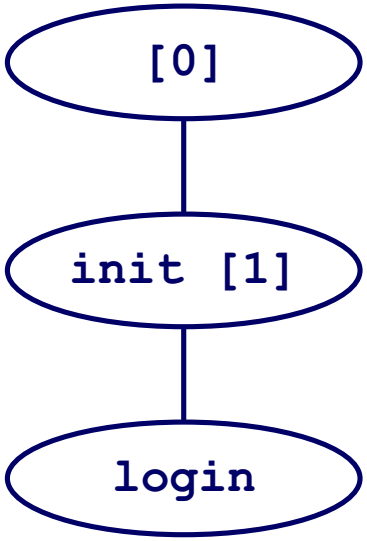


**The `getty` process execs a `login` program**

# Unix Startup: Step 4

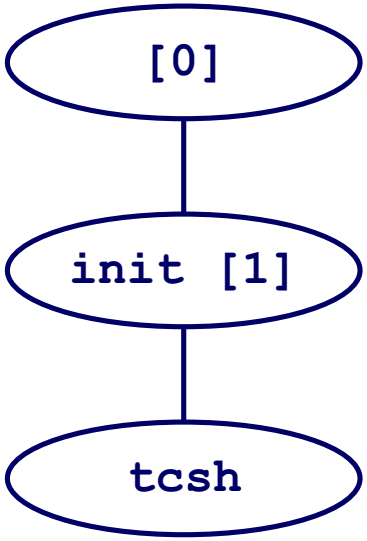


**`login` reads login-ID and passwd.**
**if OK, it execs a *shell.***
**if not OK, it execs another `getty`**

In case of **`login`** on the console
**`xinit`** may be used instead of
a shell to start the window manger

# Shell Programs

**A *shell* is an application program that runs programs on behalf of the user.**

- `sh` – Original Unix Bourne Shell
- `csh` – BSD Unix C Shell, `tcsh` – Enhanced C Shell
- `bash` –Bourne-Again Shell

```
int main()
{
    char cmdline[MAXLINE];

    while (1) {
        /* read */
        printf("> ");
        Fgets(cmdline, MAXLINE, stdin);
        if (feof(stdin))
            exit(0);

        /* evaluate */
        eval(cmdline);
    }
}
```

**Execution is a sequence of read/evaluate steps**

# Simple Shell `eval` Function

```
void eval(char *cmdline)
{
    char *argv[MAXARGS]; /* argv for execve() */
    int bg;              /* should the job run in bg or fg? */
    pid_t pid;           /* process id */

    bg = parseline(cmdline, argv);
    if (!builtin_command(argv)) {
        if ((pid = Fork()) == 0) {   /* child runs user job */
            if (execve(argv[0], argv, environ) < 0) {
                printf("%s: Command not found.\n", argv[0]);
                exit(0);
            }
        }

        if (!bg) {   /* parent waits for fg job to terminate */
            int status;
            if (waitpid(pid, &status, 0) < 0)
                unix_error("waitfg: waitpid error");
        }
        else         /* otherwise, don't wait for bg job */
            printf("%d %s", pid, cmdline);
    }
}
```

# Problem with Simple Shell Example

**Shell correctly waits for and reaps foreground jobs.**

**But what about background jobs?**

- **Will become zombies when they terminate.**
- **Will never be reaped because shell (typically) will not terminate.**
- **Creates a memory leak that will eventually crash the kernel when it runs out of memory.**

**Solution: Reaping background jobs requires a mechanism called a *signal*.**

# Signals

A *signal* is a small message that notifies a process that an event of some type has occurred in the system.

- Kernel abstraction for exceptions and interrupts.
- Sent from the kernel (sometimes at the request of another process) to a process.
- Different signals are identified by small integer ID's (1-30)
- The only information in a signal is its ID and the fact that it arrived.

| ID | Name | Default Action | Corresponding Event |
|---|---|---|---|
| 2 | SIGINT | Terminate | Interrupt from keyboard (ctl-c) |
| 9 | SIGKILL | Terminate | Kill program (cannot override or ignore) |
| 11 | SIGSEGV | Terminate & Dump | Segmentation violation |
| 14 | SIGALRM | Terminate | Timer signal |
| 17 | SIGCHLD | Ignore | Child stopped or terminated |

# Signal Concepts

## Sending a signal

- Kernel *sends* (delivers) a signal to a *destination process* by updating some state in the context of the destination process.
- Kernel sends a signal for one of the following reasons:
  - Kernel has detected a system event such as divide-by-zero (SIGFPE) or the termination of a child process (SIGCHLD)
  - Another process has invoked the `kill` system call to explicitly request the kernel to send a signal to the destination process.

# Signal Concepts (cont)

## Receiving a signal

- A destination process *receives* a signal when it is forced by the kernel to react in some way to the delivery of the signal.
- Three possible ways to react:
  - Ignore the signal (do nothing)
  - Terminate the process (with optional core dump).
  - *Catch* the signal by executing a user-level function called a signal handler.
    - » Akin to a hardware exception handler being called in response to an asynchronous interrupt.

# Signal Concepts (cont)

A signal is *pending* if it has been sent but not yet received.

- There can be at most one pending signal of any particular type.
- Important: Signals are not queued
  - If a process has a pending signal of type k, then subsequent signals of type k that are sent to that process are discarded.

A process can *block* the receipt of certain signals.

- Blocked signals can be delivered, but will not be received until the signal is unblocked.

A pending signal is received at most once.

# Signal Concepts

**Kernel maintains `pending` and `blocked` bit vectors in the context of each process.**

- **`pending` – represents the set of pending signals**
  - **Kernel sets bit k in `pending` whenever a signal of type k is delivered.**
  - **Kernel clears bit k in `pending` whenever a signal of type k is received**
- **`blocked` – represents the set of blocked signals**
  - **Can be set and cleared by the application using the `sigprocmask` function.**

# Process Groups

## Every process belongs to exactly one process group

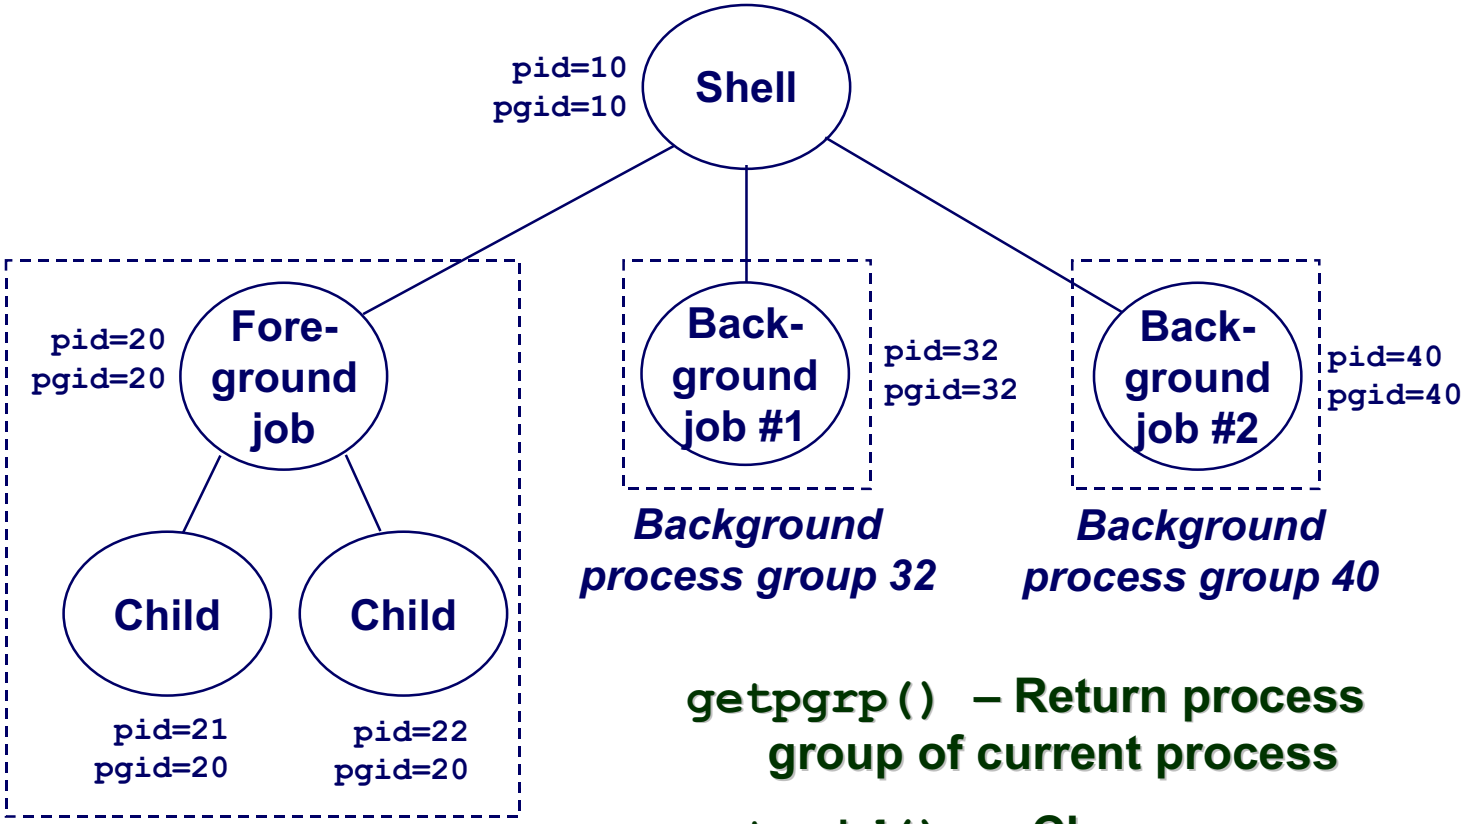


`getpgrp()` – Return process group of current process

`setpgid()` – Change process group of a process

# Sending Signals with `kill` Program

`kill` program sends arbitrary signal to a process or process group

## Examples

- `kill -9 24818`
  - Send SIGKILL to process 24818
- `kill -9 -24817`
  - Send SIGKILL to every process in process group 24817.

```
linux> ./forks 16
linux> Child1: pid=24818 pgrp=24817
Child2: pid=24819 pgrp=24817

linux> ps
  PID TTY          TIME CMD
24788 pts/2    00:00:00 tcsh
24818 pts/2    00:00:02 forks
24819 pts/2    00:00:02 forks
24820 pts/2    00:00:00 ps
linux> kill -9 -24817
linux> ps
  PID TTY          TIME CMD
24788 pts/2    00:00:00 tcsh
24823 pts/2    00:00:00 ps
linux>
```

# Sending Signals from the Keyboard

**Typing ctrl-c (ctrl-z) sends a SIGINT (SIGTSTP) to every job in the foreground process group.**

- **SIGINT – default action is to terminate each process**
- **SIGTSTP – default action is to stop (suspend) each process**

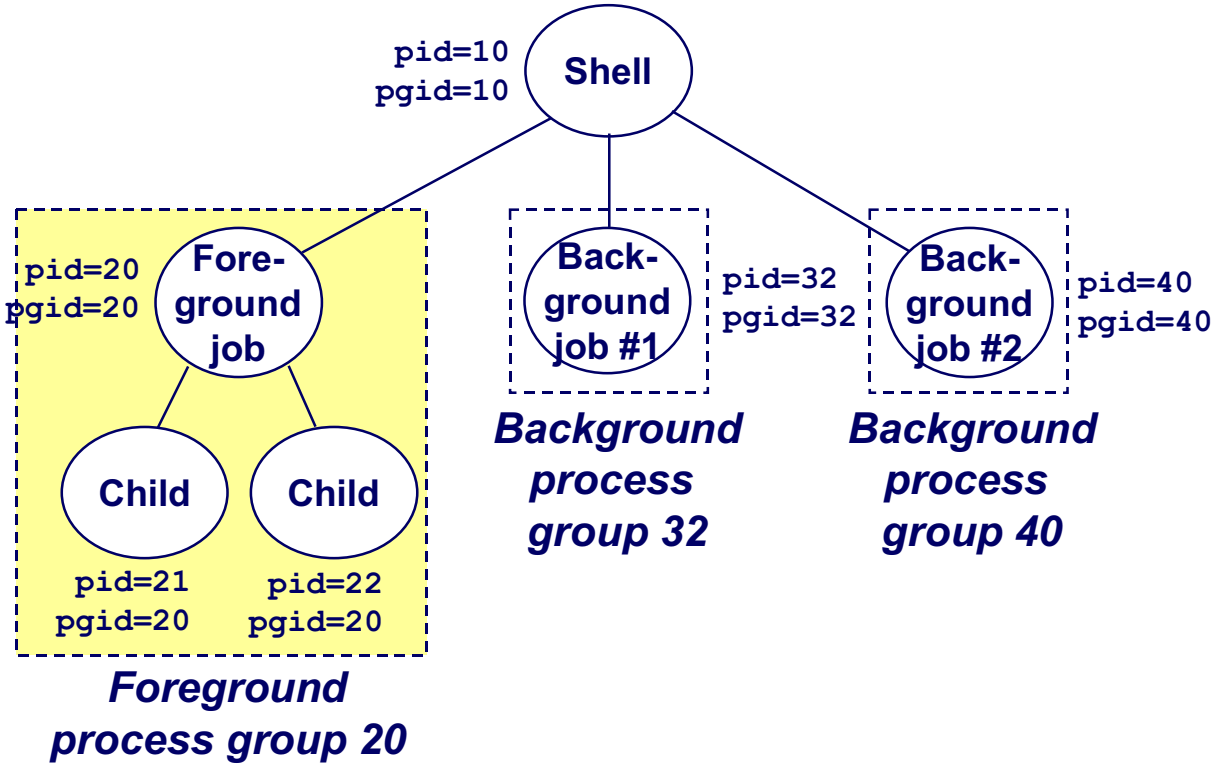

# Example of `ctrl-c` and `ctrl-z`

```
linux> ./forks 17
Child: pid=24868 pgrp=24867
Parent: pid=24867 pgrp=24867
 <typed ctrl-z>
Suspended
linux> ps a
  PID TTY      STAT   TIME COMMAND
24788 pts/2    S      0:00 -usr/local/bin/tcsh -i
24867 pts/2    T      0:01 ./forks 17
24868 pts/2    T      0:01 ./forks 17
24869 pts/2    R      0:00 ps a
bass> fg
./forks 17
<typed ctrl-c>
linux> ps a
  PID TTY      STAT   TIME COMMAND
24788 pts/2    S      0:00 -usr/local/bin/tcsh -i
24870 pts/2    R      0:00 ps a
```

# Sending Signals with `kill` Function

```
void fork12()
{
    pid_t pid[N];
    int i, child_status;
    for (i = 0; i < N; i++)
        if ((pid[i] = fork()) == 0)
            while(1); /* Child infinite loop */

    /* Parent terminates the child processes */
    for (i = 0; i < N; i++) {
        printf("Killing process %d\n", pid[i]);
        kill(pid[i], SIGINT);
    }

    /* Parent reaps terminated children */
    for (i = 0; i < N; i++) {
        pid_t wpid = wait(&child_status);
        if (WIFEXITED(child_status))
            printf("Child %d terminated with exit status %d\n",
                   wpid, WEXITSTATUS(child_status));
        else
            printf("Child %d terminated abnormally\n", wpid);
    }
}
```

# Receiving Signals

Suppose kernel is returning from an exception handler and is ready to pass control to process *p*.

Kernel computes `pnb = pending & ~blocked`

- The set of pending nonblocked signals for process *p*

If `(pnb == 0)`

- Pass control to next instruction in the logical flow for *p*.

Else

- Choose least nonzero bit *k* in `pnb` and force process *p* to receive signal *k*.
- The receipt of the signal triggers some *action* by *p*
- Repeat for all nonzero *k* in `pnb`.
- Pass control to next instruction in logical flow for *p*.

# Default Actions

Each signal type has a predefined *default action*, which is one of:

- The process terminates
- The process terminates and dumps core.
- The process stops until restarted by a SIGCONT signal.
- The process ignores the signal.

# Installing Signal Handlers

The `signal` function modifies the default action associated with the receipt of signal `signum`:

- `handler_t *signal(int signum, handler_t *handler)`

Different values for `handler`:

- SIG_IGN: ignore signals of type `signum`
- SIG_DFL: revert to the default action on receipt of signals of type `signum`.
- Otherwise, handler is the address of a *signal handler*
  - Called when process receives signal of type `signum`
  - Referred to as "*installing*" the handler.
  - Executing handler is called "*catching*" or "*handling*" the signal.
  - When the handler executes its return statement, control passes back to instruction in the control flow of the process that was interrupted by receipt of the signal.

# Signal Handling Example

```
void int_handler(int sig)
{
    printf("Process %d received signal %d\n",
            getpid(), sig);
    exit(0);
}

void fork13()
{
    pid_t pid[N];
    int i, child_status;
    signal(SIGINT, int_handler);

    . . .
}
```

```
linux> ./forks 13
Killing process 24973
Killing process 24974
Killing process 24975
Killing process 24976
Killing process 24977
Process 24977 received signal 2
Child 24977 terminated with exit status 0
Process 24976 received signal 2
Child 24976 terminated with exit status 0
Process 24975 received signal 2
Child 24975 terminated with exit status 0
Process 24974 received signal 2
Child 24974 terminated with exit status 0
Process 24973 received signal 2
Child 24973 terminated with exit status 0
linux>
```

# Signal Handler Funkiness

```
int ccount = 0;
void child_handler(int sig)
{
    int child_status;
    pid_t pid = wait(&child_status);
    ccount--;
    printf("Received signal %d from process %d\n",
           sig, pid);
}

void fork14()
{
    pid_t pid[N];
    int i, child_status;
    ccount = N;
    signal(SIGCHLD, child_handler);
    for (i = 0; i < N; i++)
        if ((pid[i] = fork()) == 0) {
            /* Child: Exit */
            exit(0);
        }
    while (ccount > 0)
        pause();/* Suspend until signal occurs */
}
```

## Pending signals are not queued

- For each signal type, just have single bit indicating whether or not signal is pending
- Even if multiple processes have sent this signal

# Living With Nonqueuing Signals

## Must check for all terminated jobs

- Typically loop with `wait`

```
void child_handler2(int sig)
{
    int child_status;
    pid_t pid;
    while ((pid = waitpid(-1,&child_status,WNOHANG)) > 0) {
        ccount--;
        printf("Received signal %d from process %d\n", sig, pid);
    }
}

void fork15()
{
    . . .
    signal(SIGCHLD, child_handler2);
    . . .
}
```

# Signal Handler Funkiness (Cont.)

**Signal arrival during long system calls (say a `read`)**

- **Signal handler interrupts `read()` call**
  - **Linux: upon return from signal handler, the `read()` call is restarted automatically**
  - **Some other flavors of Unix can cause the `read()` call to fail with an `EINTER` error number (`errno`)**
    **in this case, the application program can restart the slow system call**

**Subtle differences like these complicate the writing of portable code that uses signals.**

# A Program That Reacts to Externally Generated Events (ctrl-c)

```
#include <stdlib.h>
#include <stdio.h>
#include <signal.h>

void handler(int sig) {
  printf("You think hitting ctrl-c will stop the bomb?\n");
  sleep(2);
  printf("Well...");
  fflush(stdout);
  sleep(1);
  printf("OK\n");
  exit(0);
}

main() {
  signal(SIGINT, handler); /* installs ctl-c handler */
  while(1) {
  }
}
```

# A Program That Reacts to Internally Generated Events

```
#include <stdio.h>
#include <signal.h>

int beeps = 0;

/* SIGALRM handler */
void handler(int sig) {
  printf("BEEP\n");
  fflush(stdout);

  if (++beeps < 5)
    alarm(1);
  else {
    printf("BOOM!\n");
    exit(0);
  }
}
```

```
main() {
  signal(SIGALRM, handler);
  alarm(1); /* send SIGALRM in
               1 second */

  while (1) {
    /* handler returns here */
  }
}
```

```
linux> a.out
BEEP
BEEP
BEEP
BEEP
BEEP
BOOM!
bass>
```

# Nonlocal Jumps: `setjmp/longjmp`

**Powerful (but dangerous) user-level mechanism for transferring control to an arbitrary location.**

- Controlled to way to break the procedure call / return discipline
- Useful for error recovery and signal handling

```
int setjmp(jmp_buf j)
```

- Must be called before longjmp
- Identifies a return site for a subsequent longjmp.
- Called once, returns one or more times

**Implementation:**

- Remember where you are by storing the current register context, stack pointer, and PC value in jmp_buf.
- Return 0

# `setjmp/longjmp` (cont)

## `void longjmp(jmp_buf j, int i)`

- Meaning:
  - return from the `setjmp` remembered by jump buffer `j` again...
  - …this time returning `i` instead of 0
- Called after `setjmp`
- Called once, but never returns

## `longjmp` Implementation:

- Restore register context from jump buffer `j`
- Set `%eax` (the return value) to `i`
- Jump to the location indicated by the PC stored in jump buf `j`.

# setjmp/longjmp Example

```
#include <setjmp.h>
jmp_buf buf;

main() {
   if (setjmp(buf) != 0) {
      printf("back in main due to an error\n");
   else
      printf("first time through\n");
   p1(); /* p1 calls p2, which calls p3 */
}
...
p3() {
   <error checking code>
   if (error)
      longjmp(buf, 1)
}
```

# Putting It All Together: A Program That Restarts Itself When `ctrl-c`'d

```
#include <stdio.h>
#include <signal.h>
#include <setjmp.h>

sigjmp_buf buf;

void handler(int sig) {
  siglongjmp(buf, 1);
}

main() {
  signal(SIGINT, handler);

  if (!sigsetjmp(buf, 1))
    printf("starting\n");
  else
    printf("restarting\n");
```

```
while(1) {
    sleep(1);
    printf("processing...\n");
  }
}
```

```
bass> a.out
starting
processing...
processing...
restarting
processing...
processing...
restarting
processing...
```

# Limitations of Nonlocal Jumps

## Works within stack discipline

- Can only long jump to environment of function that has been called but not yet completed

```
jmp_buf env;

P1()
{
  if (setjmp(env)) {
    /* Long Jump to here */
  } else {
    P2();
  }
}

P2()
{  . . . P2(); . . . P3(); }

P3()
{
  longjmp(env, 1);
}
```

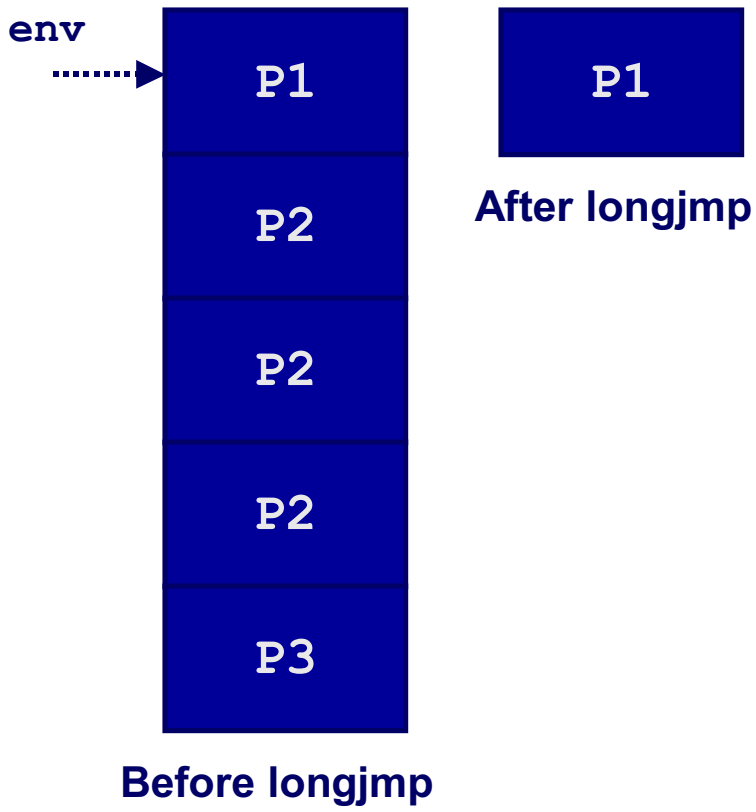

# Limitations of Long Jumps (cont.)

## Works within stack discipline

- Can only long jump to environment of function that has been called but not yet completed

```
jmp_buf env;

P1()
{
  P2(); P3();
}

P2()
{
   if (setjmp(env)) {
    /* Long Jump to here */
  }
}

P3()
{
  longjmp(env, 1);
}
```

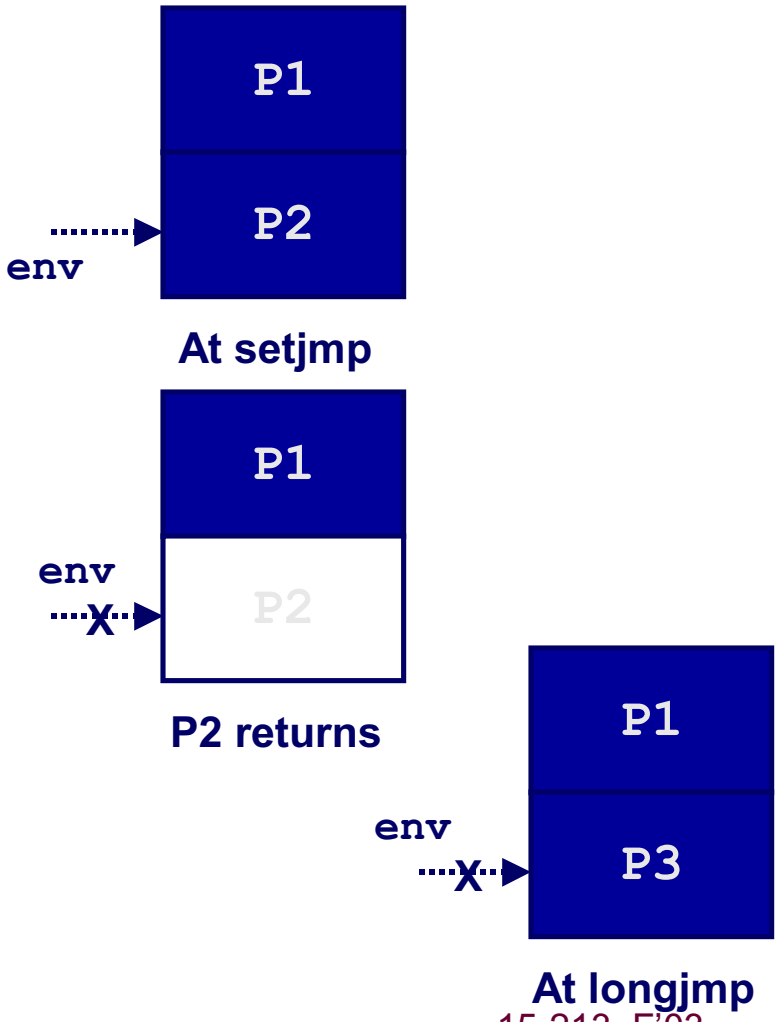

# Summary

## Signals provide process-level exception handling

- Can generate from user programs
- Can define effect by declaring signal handler

## Some caveats

- Very high overhead
  - >10,000 clock cycles
  - Only use for exceptional conditions
- Don't have queues
  - Just one bit for each pending signal type

## Nonlocal jumps provide exceptional control flow within process

- Within constraints of stack discipline