

Warm-up as You Walk In

Given

- Set `actions` (persistent/static)
- Set `states` (persistent/static)
- Function `T(s, a, s_prime)`

Write the pseudo code for:

- function `V(s)` return value

that implements:

$$V(s) = \max_{a \in \text{actions}} \sum_{s' \in \text{states}} T(s, a, s') V(s')$$

Announcements

Assignments:

- P3
 - Due Thu 3/7, 10 pm

Spring Break!

- No recitation this Friday
- HW7 (online): out Wed 3/6, due Tue 3/19
- P4: out after break, due Thu 3/28

AI: Representation and Problem Solving


Markov Decision Processes



Instructors: Pat Virtue & Stephanie Rosenthal


Slide credits: CMU AI and <http://ai.berkeley.edu>

Minimax Notation



$$V(s) = \max_a V(s'),$$

where $s' = \text{result}(s, a)$





$$\hat{a} = \operatorname{argmax}_a V(s'),$$

where $s' = \text{result}(s, a)$

Expectations

Time: 20 min + 30 min + 60 min
Probability: 0.25 x 0.50 x 0.25

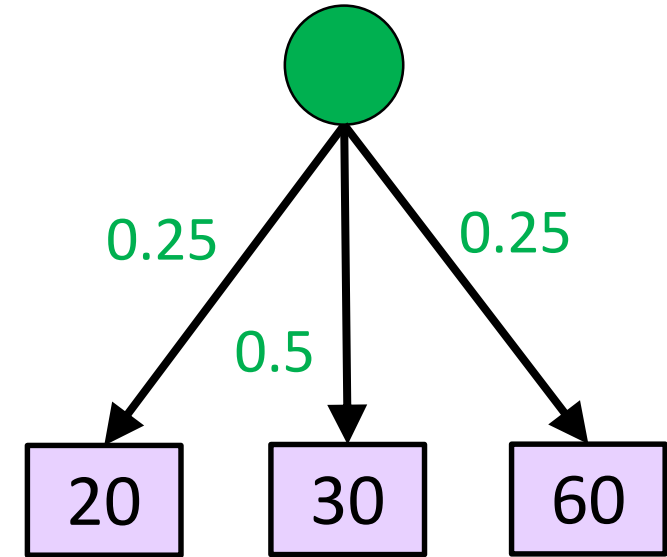

Max node notation

$$V(s) = \max_a V(s'),$$

where $s' = result(s, a)$

Chance node notation


$$V(s) = \sum_{s'} P(s') V(s')$$

Piazza Poll 1

Expectimax tree search:

Which action do we choose?

- A) Left
- B) Center
- C) Right
- D) Eight

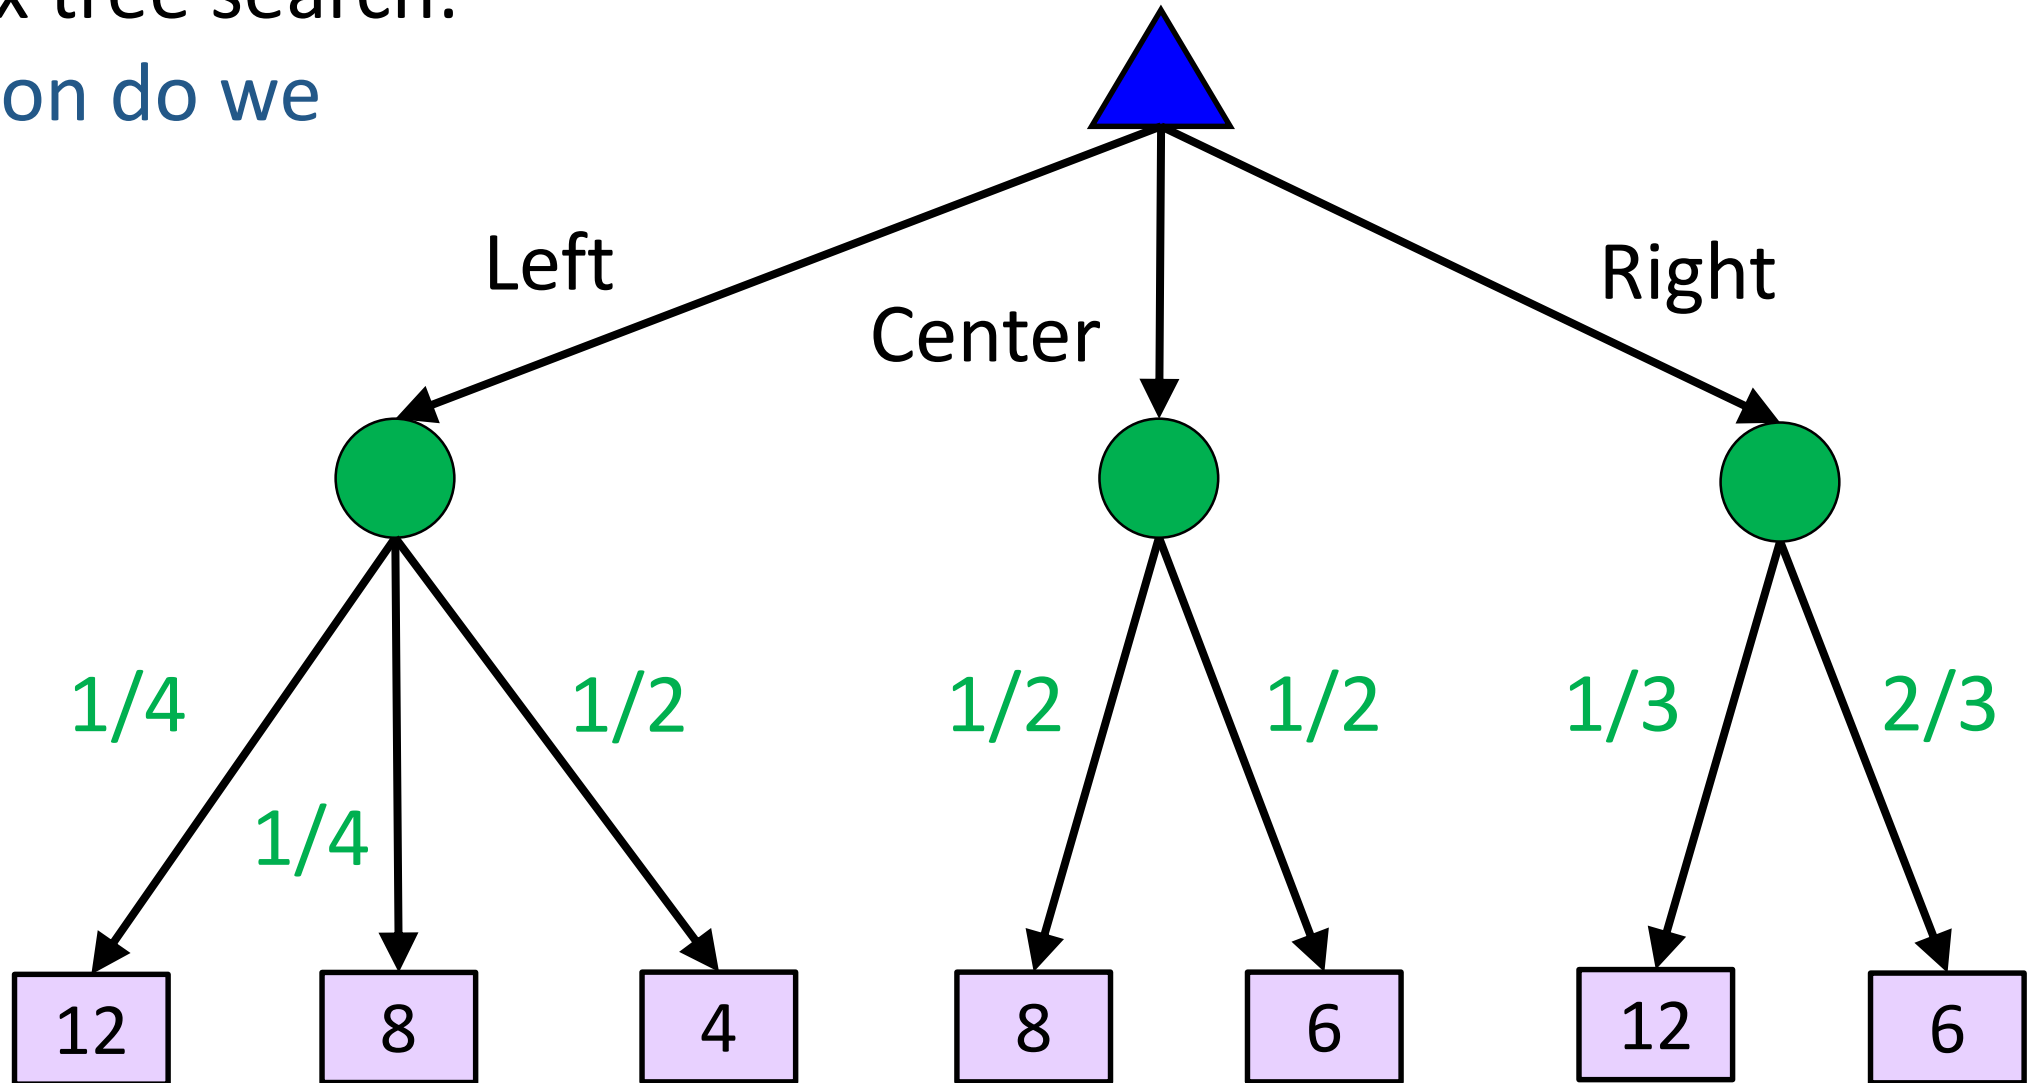


Piazza Poll 1

$$\hat{a} = \operatorname{argmax}_a \sum_{s'} P(s'|s, a) V(s')$$


Expectimax tree search:

Which action do we choose?

- A) Left
- B) Center
- C) Right
- D) Eight

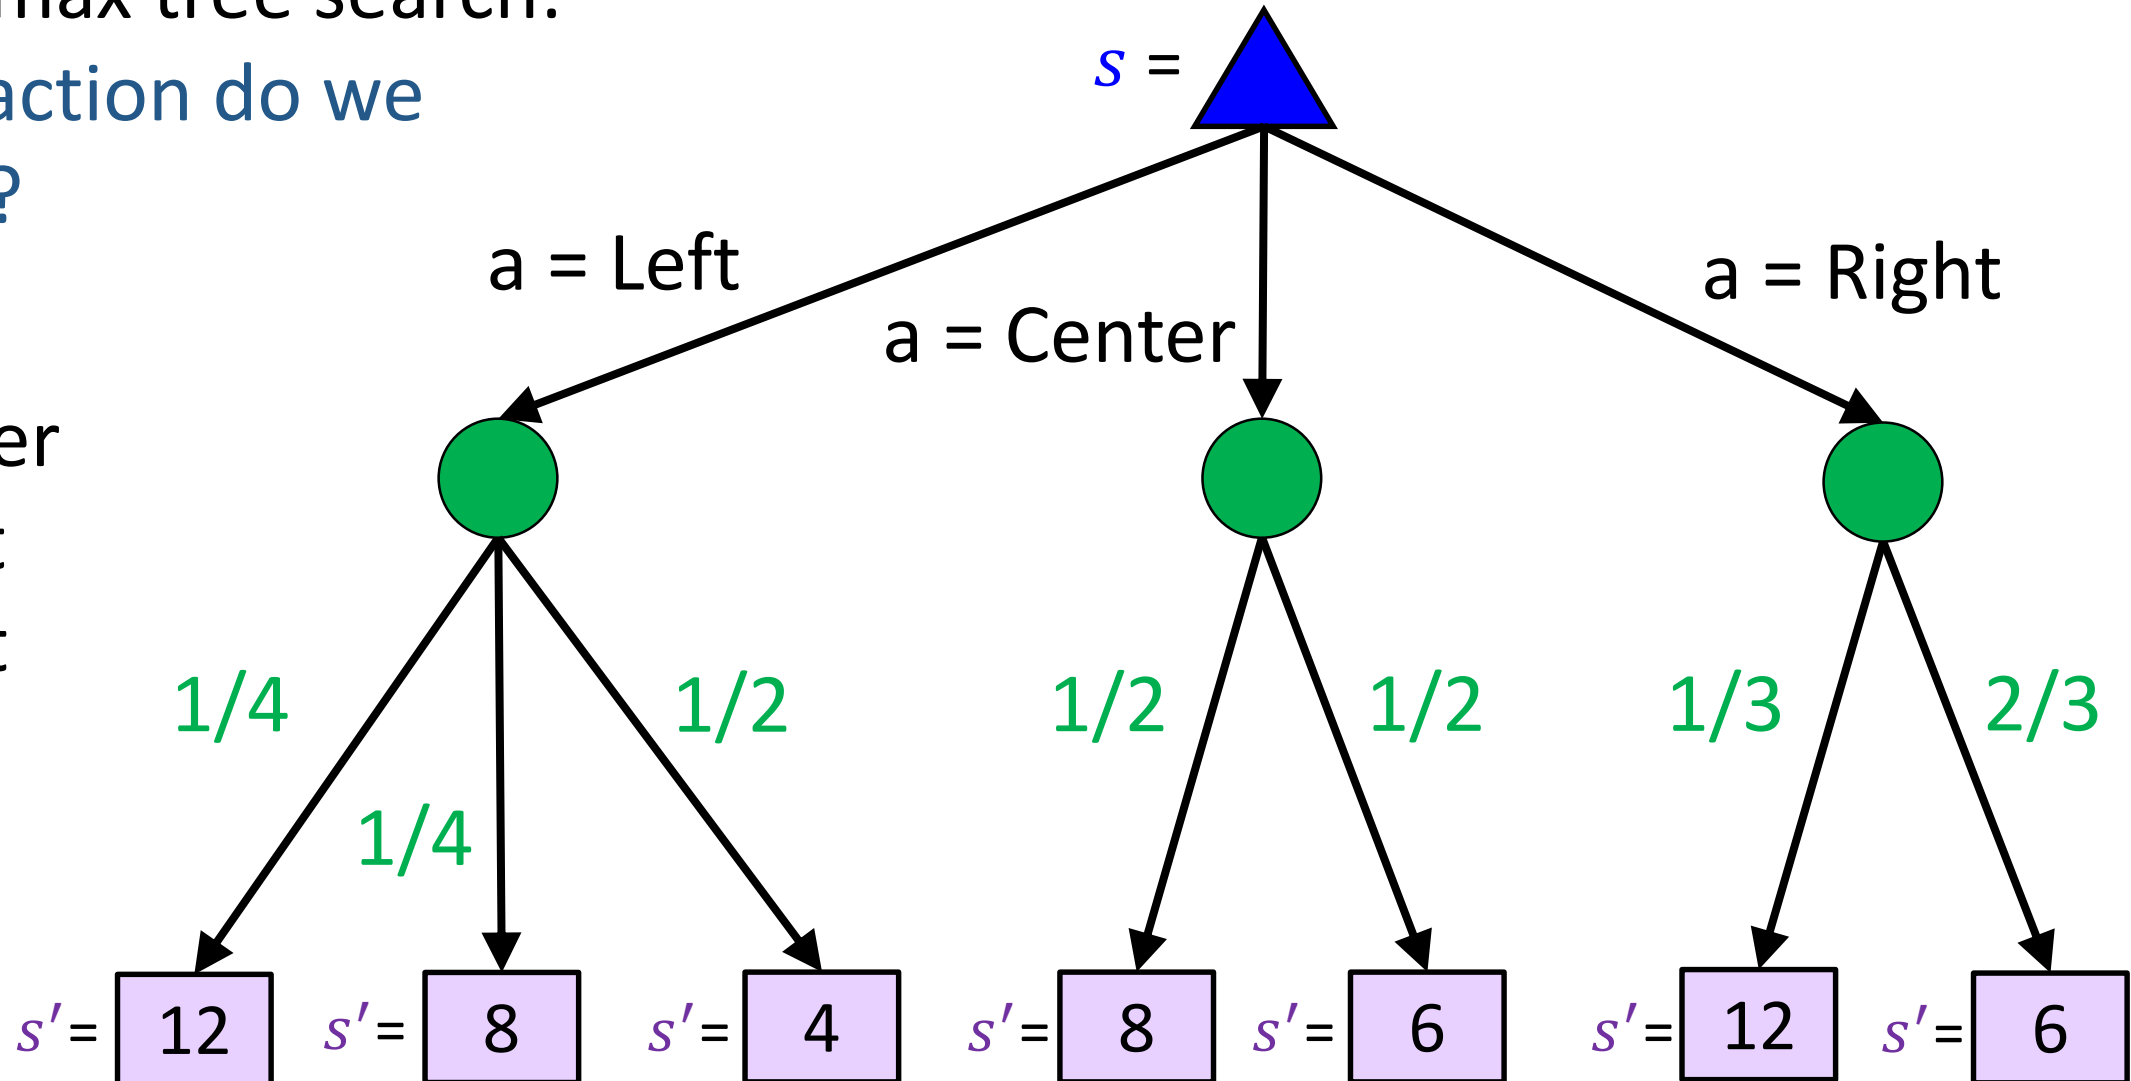

Expectimax Notation

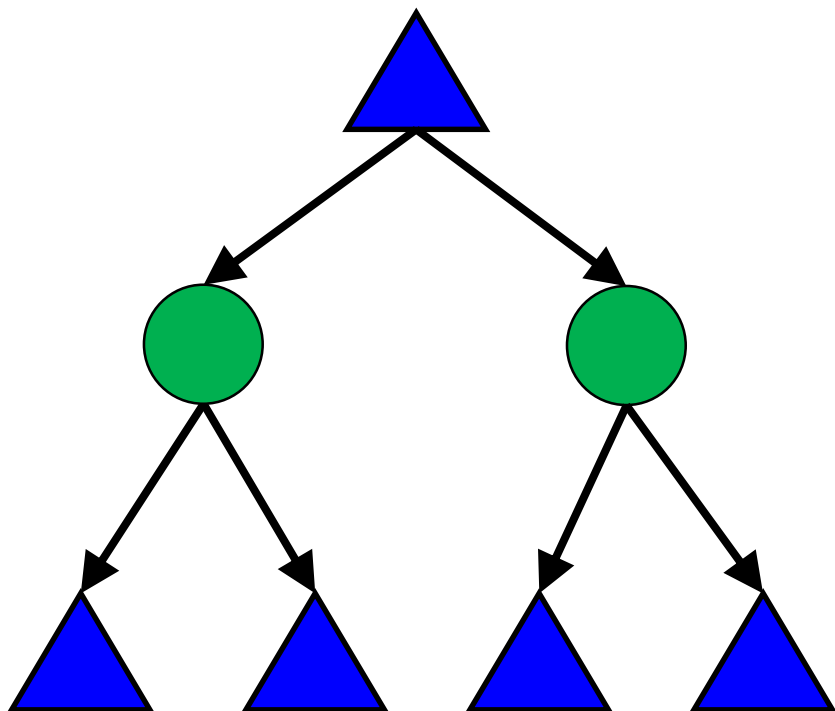

$$V(s) = \max_a \sum_{s'} P(s'|s, a) V(s')$$

Warm-up as You Walk In

Given

- Set `actions` (persistent/static)
- Set `states` (persistent/static)
- Function `T(s, a, s_prime)`

Write the pseudo code for:

- function `V(s)` return value

that implements:

$$V(s) = \max_{a \in \text{actions}} \sum_{s' \in \text{states}} T(s, a, s') V(s')$$

MDP Notation

Standard expectimax: $V(s) = \max_a \sum_{s'} P(s'|s, a) V(s')$

Bellman equations: $V(s) = \max_a \sum_{s'} P(s'|s, a) [R(s, a, s') + \gamma V(s')]$

Value iteration: $V_{k+1}(s) = \max_a \sum_{s'} P(s'|s, a) [R(s, a, s') + \gamma V_k(s')], \quad \forall s$

Q-iteration: $Q_{k+1}(s, a) = \sum_{s'} P(s'|s, a) [R(s, a, s') + \gamma \max_{a'} Q_k(s', a')], \quad \forall s, a$

Policy extraction: $\pi_V(s) = \operatorname{argmax}_a \sum_{s'} P(s'|s, a) [R(s, a, s') + \gamma V(s')], \quad \forall s$

Policy evaluation: $V_{k+1}^\pi(s) = \sum_{s'} P(s'|s, \pi(s)) [R(s, \pi(s), s') + \gamma V_k^\pi(s')], \quad \forall s$

Policy improvement: $\pi_{new}(s) = \operatorname{argmax}_a \sum_{s'} P(s'|s, a) [R(s, a, s') + \gamma V^{\pi_{old}}(s')], \quad \forall s$

MDP Notation

Standard expectimax: $V(s) = \max_a \sum_{s'} P(s'|s, a) V(s')$

Bellman equations: $V(s) = \max_a \sum_{s'} P(s'|s, a) [R(s, a, s') + \gamma V(s')]$

Value iteration: $V_{k+1}(s) = \max_a \sum_{s'} P(s'|s, a) [R(s, a, s') + \gamma V_k(s')], \quad \forall s$


Q-iteration: $Q_{k+1}(s, a) = \sum_{s'} P(s'|s, a) [R(s, a, s') + \gamma \max_{a'} Q_k(s', a')], \quad \forall s, a$

Policy extraction: $\pi_V(s) = \operatorname{argmax}_a \sum_{s'} P(s'|s, a) [R(s, a, s') + \gamma V(s')], \quad \forall s$

Policy evaluation: $V_{k+1}^\pi(s) = \sum_{s'} P(s'|s, \pi(s)) [R(s, \pi(s), s') + \gamma V_k^\pi(s')], \quad \forall s$


Policy improvement: $\pi_{new}(s) = \operatorname{argmax}_a \sum_{s'} P(s'|s, a) [R(s, a, s') + \gamma V^{\pi_{old}}(s')], \quad \forall s$

Non-Deterministic Search

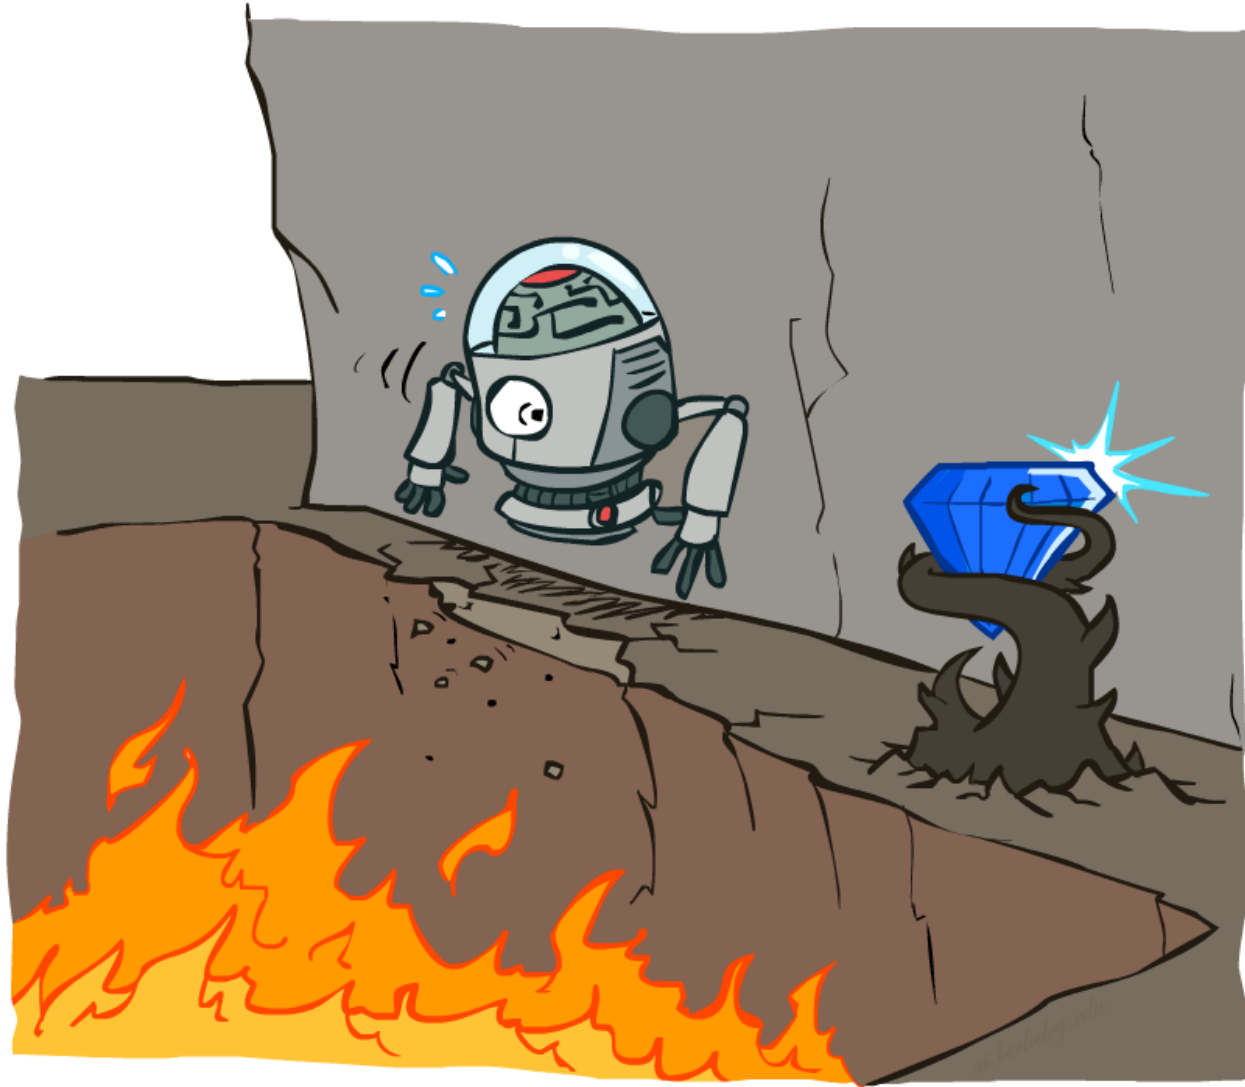


Example: Grid World

- A maze-like problem
 - The agent lives in a grid
 - Walls block the agent's path
- Noisy movement: actions do not always go as planned
 - 80% of the time, the action North takes the agent North (if there is no wall there)
 - 10% of the time, North takes the agent West; 10% East
 - If there is a wall in the direction the agent would have been taken, the agent stays put
- The agent receives rewards each time step
 - Small "living" reward each step (can be negative)
 - Big rewards come at the end (good or bad)
- Goal: maximize sum of rewards

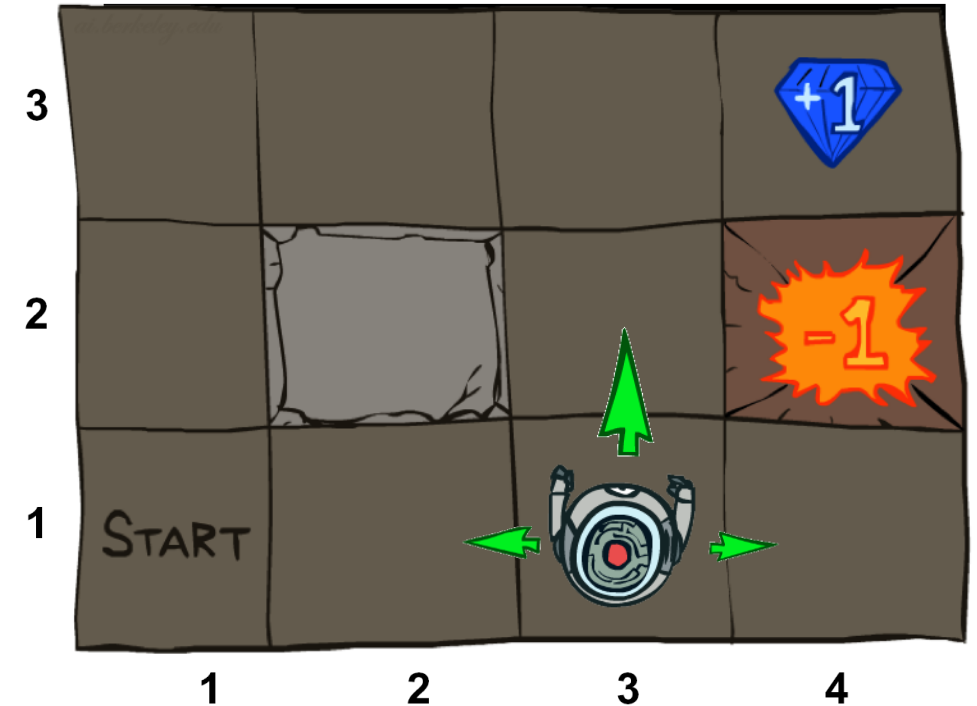


Grid World Actions

Deterministic Grid World

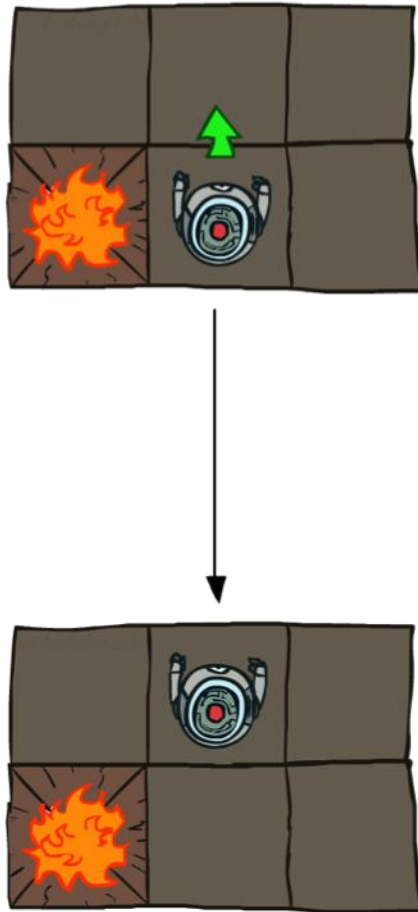

Stochastic Grid World

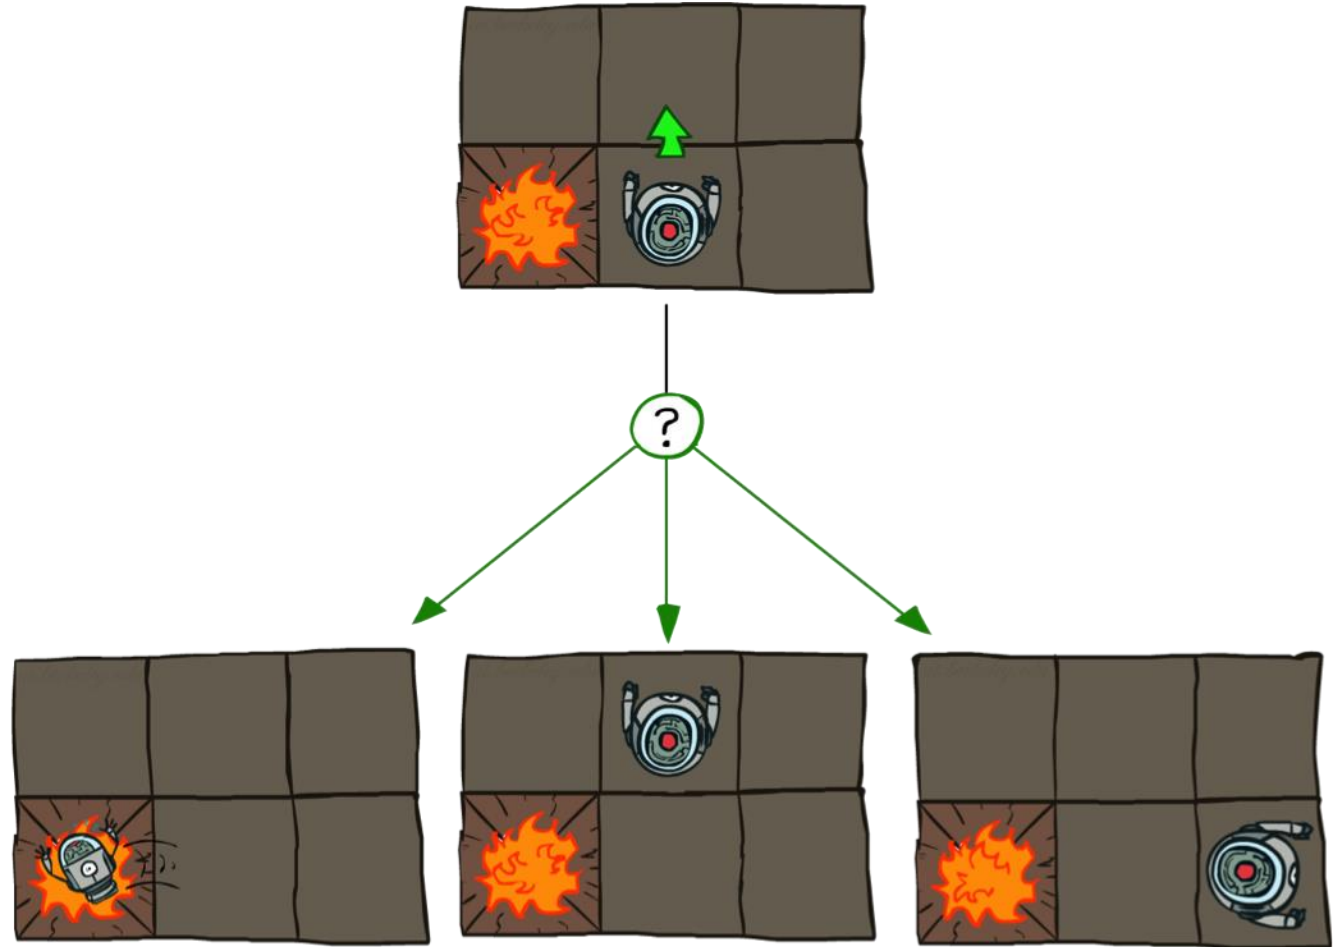


Markov Decision Processes

An MDP is defined by:

- A **set of states** $s \in S$
- A **set of actions** $a \in A$
- A **transition function** $T(s, a, s')$
 - Probability that a from s leads to s' , i.e., $P(s' | s, a)$
 - Also called the model or the dynamics
- A **reward function** $R(s, a, s')$
 - Sometimes just $R(s)$ or $R(s')$
- A **start state**
- Maybe a **terminal state**

MDPs are non-deterministic search problems

- One way to solve them is with expectimax search
- We'll have a new tool soon

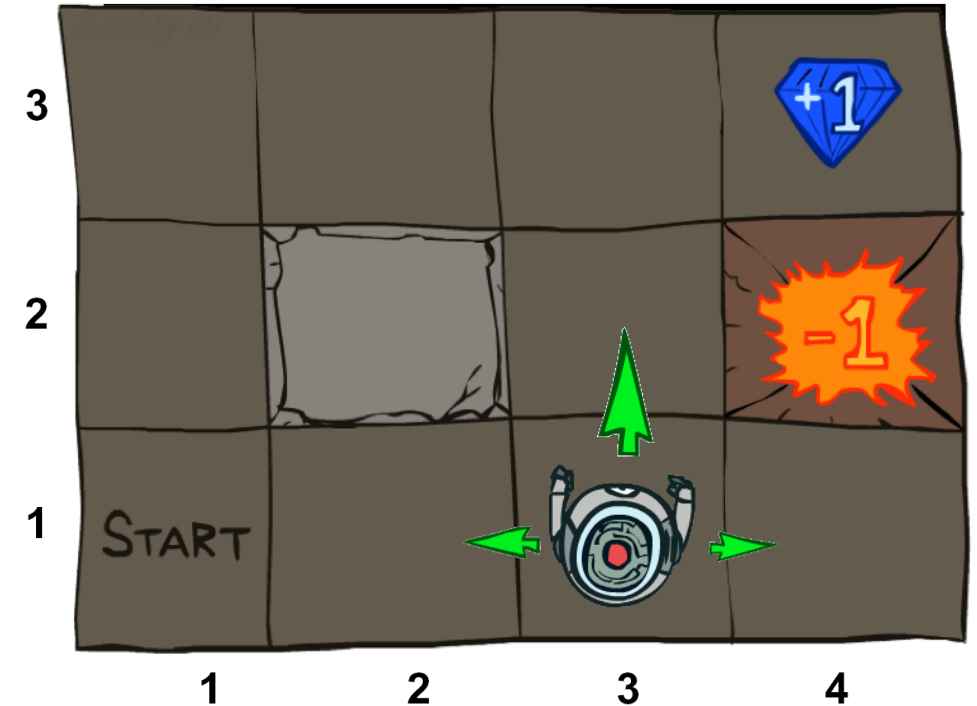

Demo of Gridworld

What is Markov about MDPs?

“Markov” generally means that given the present state, the future and the past are independent

For Markov decision processes, “Markov” means action outcomes depend only on the current state

$$\begin{aligned} &P(S_{t+1} = s' | S_t = s_t, A_t = a_t, S_{t-1} = s_{t-1}, A_{t-1}, \dots, S_0 = s_0) \\ &= \\ &P(S_{t+1} = s' | S_t = s_t, A_t = a_t) \end{aligned}$$

This is just like search, where the successor function could only depend on the current state (not the history)



Andrey Markov
(1856-1922)

Policies


In deterministic single-agent search problems, we wanted an optimal **plan**, or sequence of actions, from start to a goal

For MDPs, we want an optimal **policy** $\pi^*: S \rightarrow A$

- A policy π gives an action for each state
- An optimal policy is one that maximizes expected utility if followed
- An explicit policy defines a reflex agent

Expectimax didn't compute entire policies

- It computed the action for a single state only

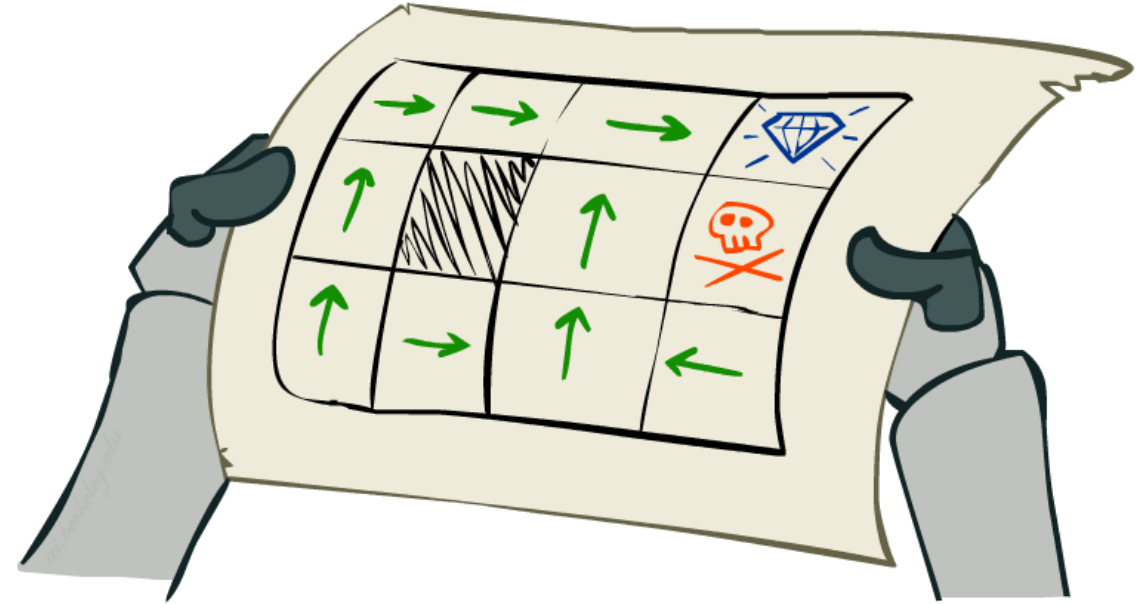





Optimal policy when $R(s, a, s') = -0.03$
for all non-terminals s

Piazza Poll 2


Which sequence of optimal policies matches the following sequence of living rewards:

$\{-0.01, -0.03, -0.04, -2.0\}$


- I. $\{A, B, C, D\}$
- II. $\{B, C, A, D\}$
- III. $\{D, C, B, A\}$
- IV. $\{D, A, C, B\}$

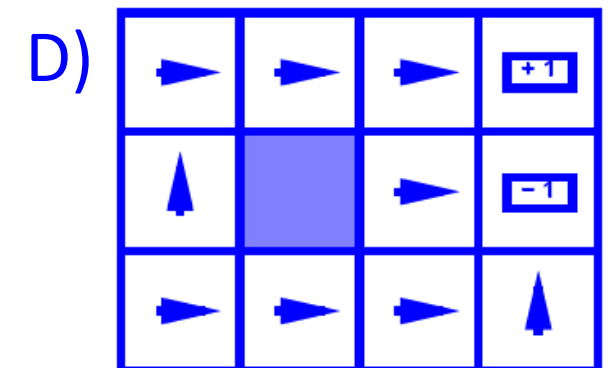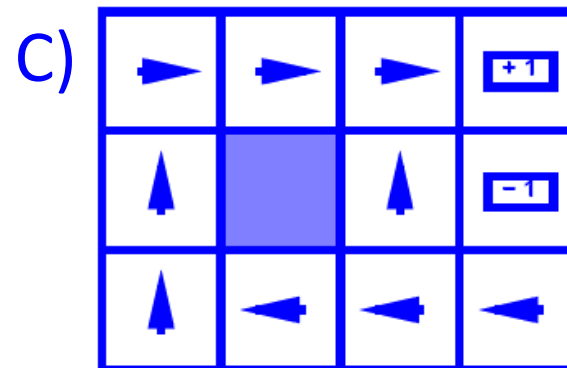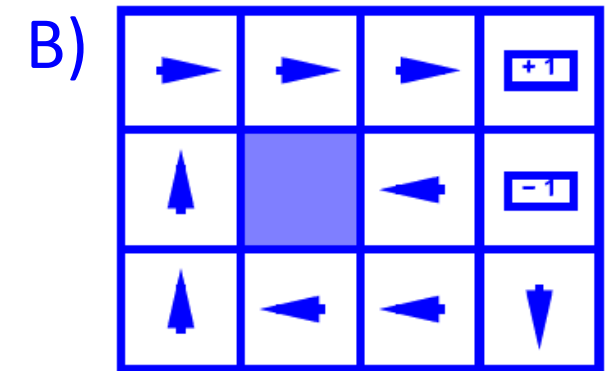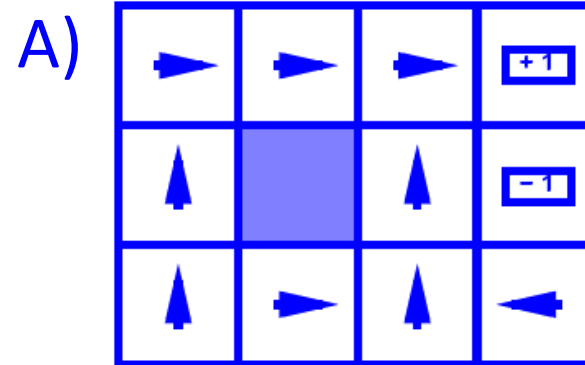


Optimal Policies

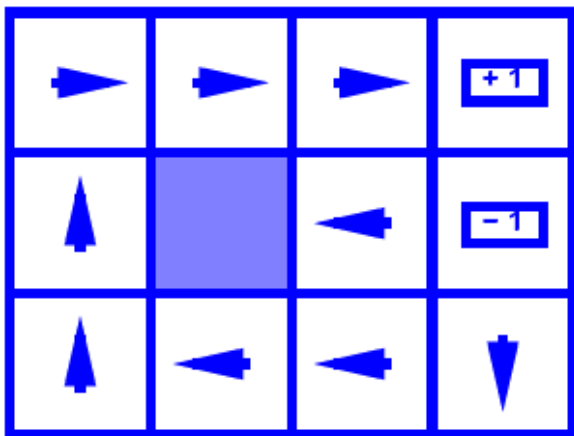


$$R(s) = -0.01$$

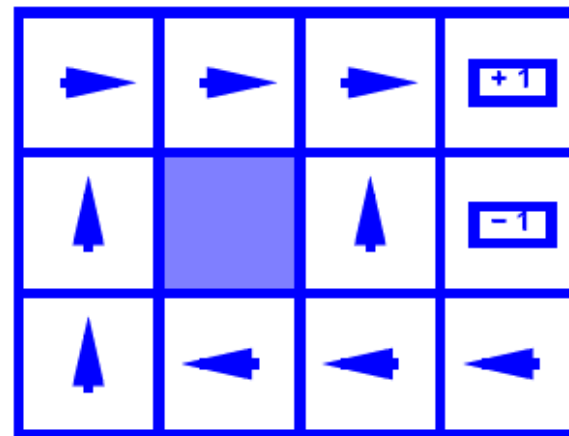

$$R(s) = -0.03$$

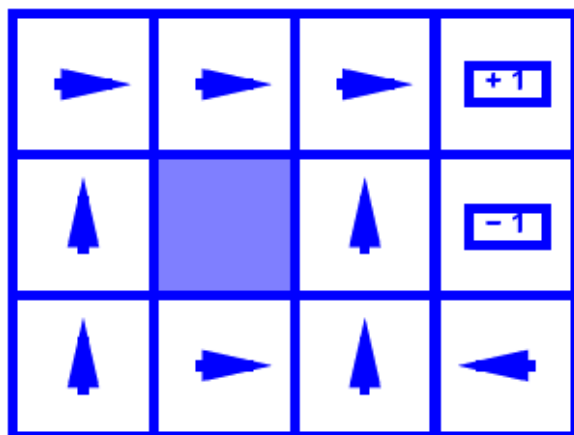


$$R(s) = -0.4$$

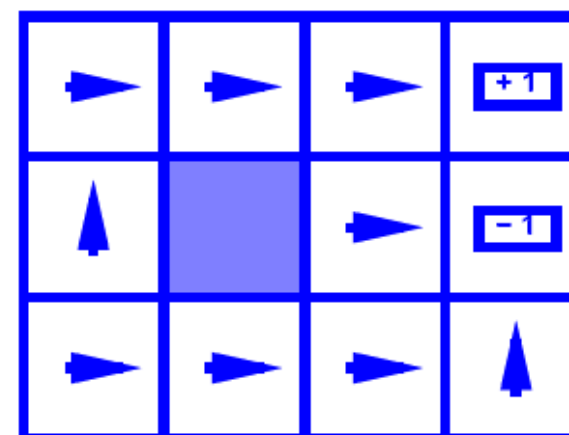

$$R(s) = -2.0$$

Example: Racing

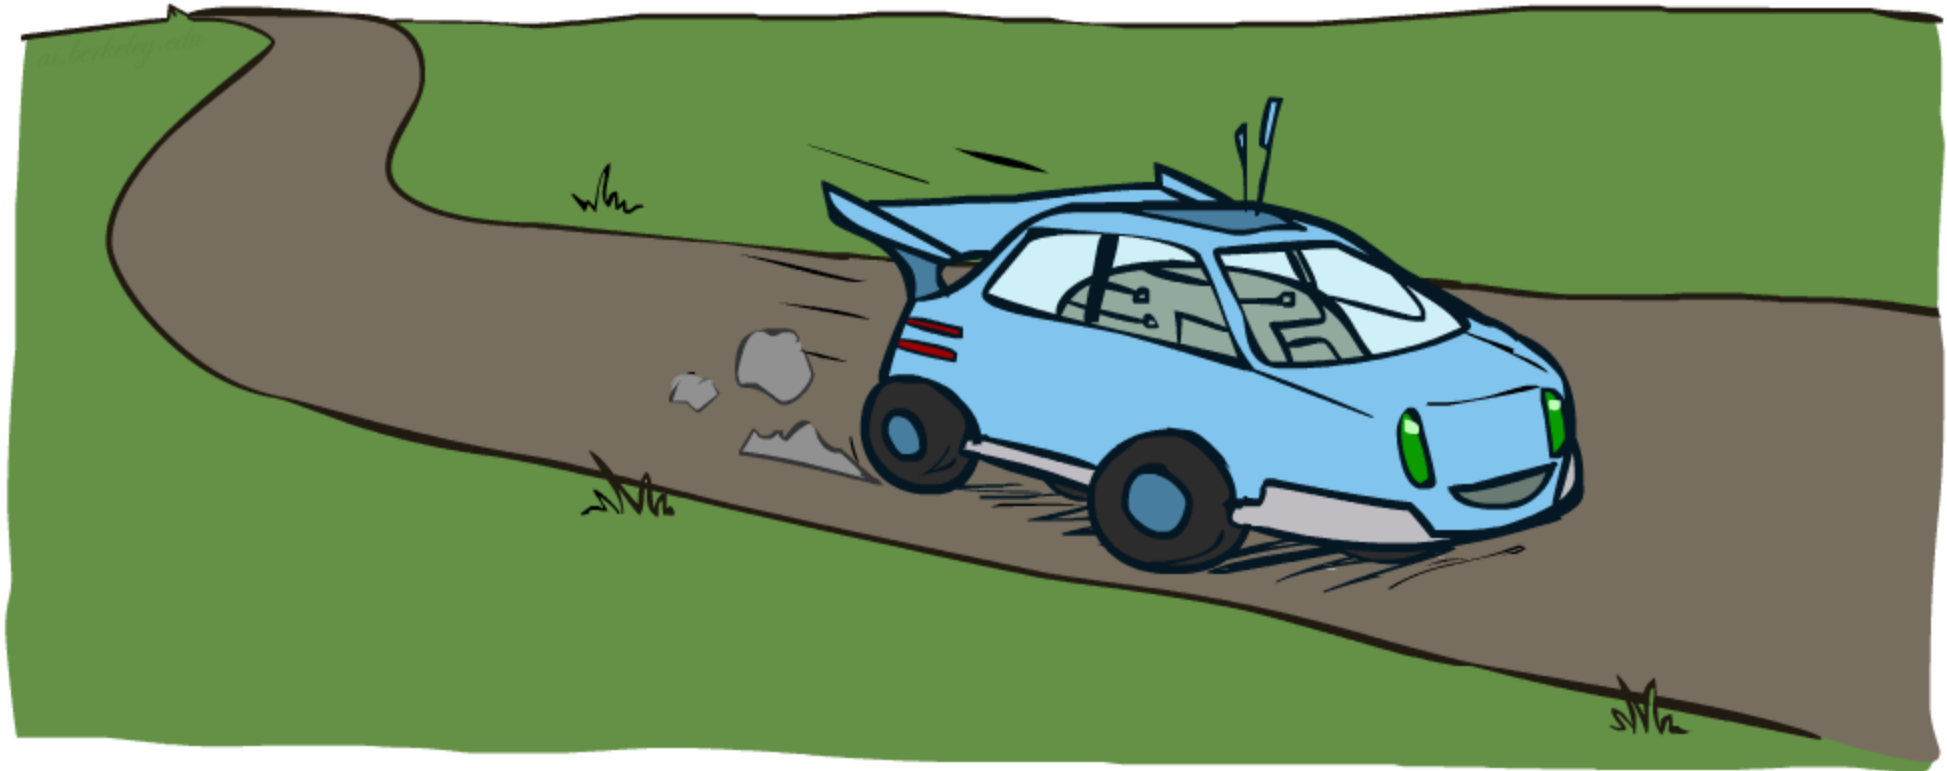


Example: Racing

A robot car wants to travel far, quickly


Three states: **Cool**, **Warm**, Overheated

Two actions: **Slow**, **Fast**

Going faster gets double reward

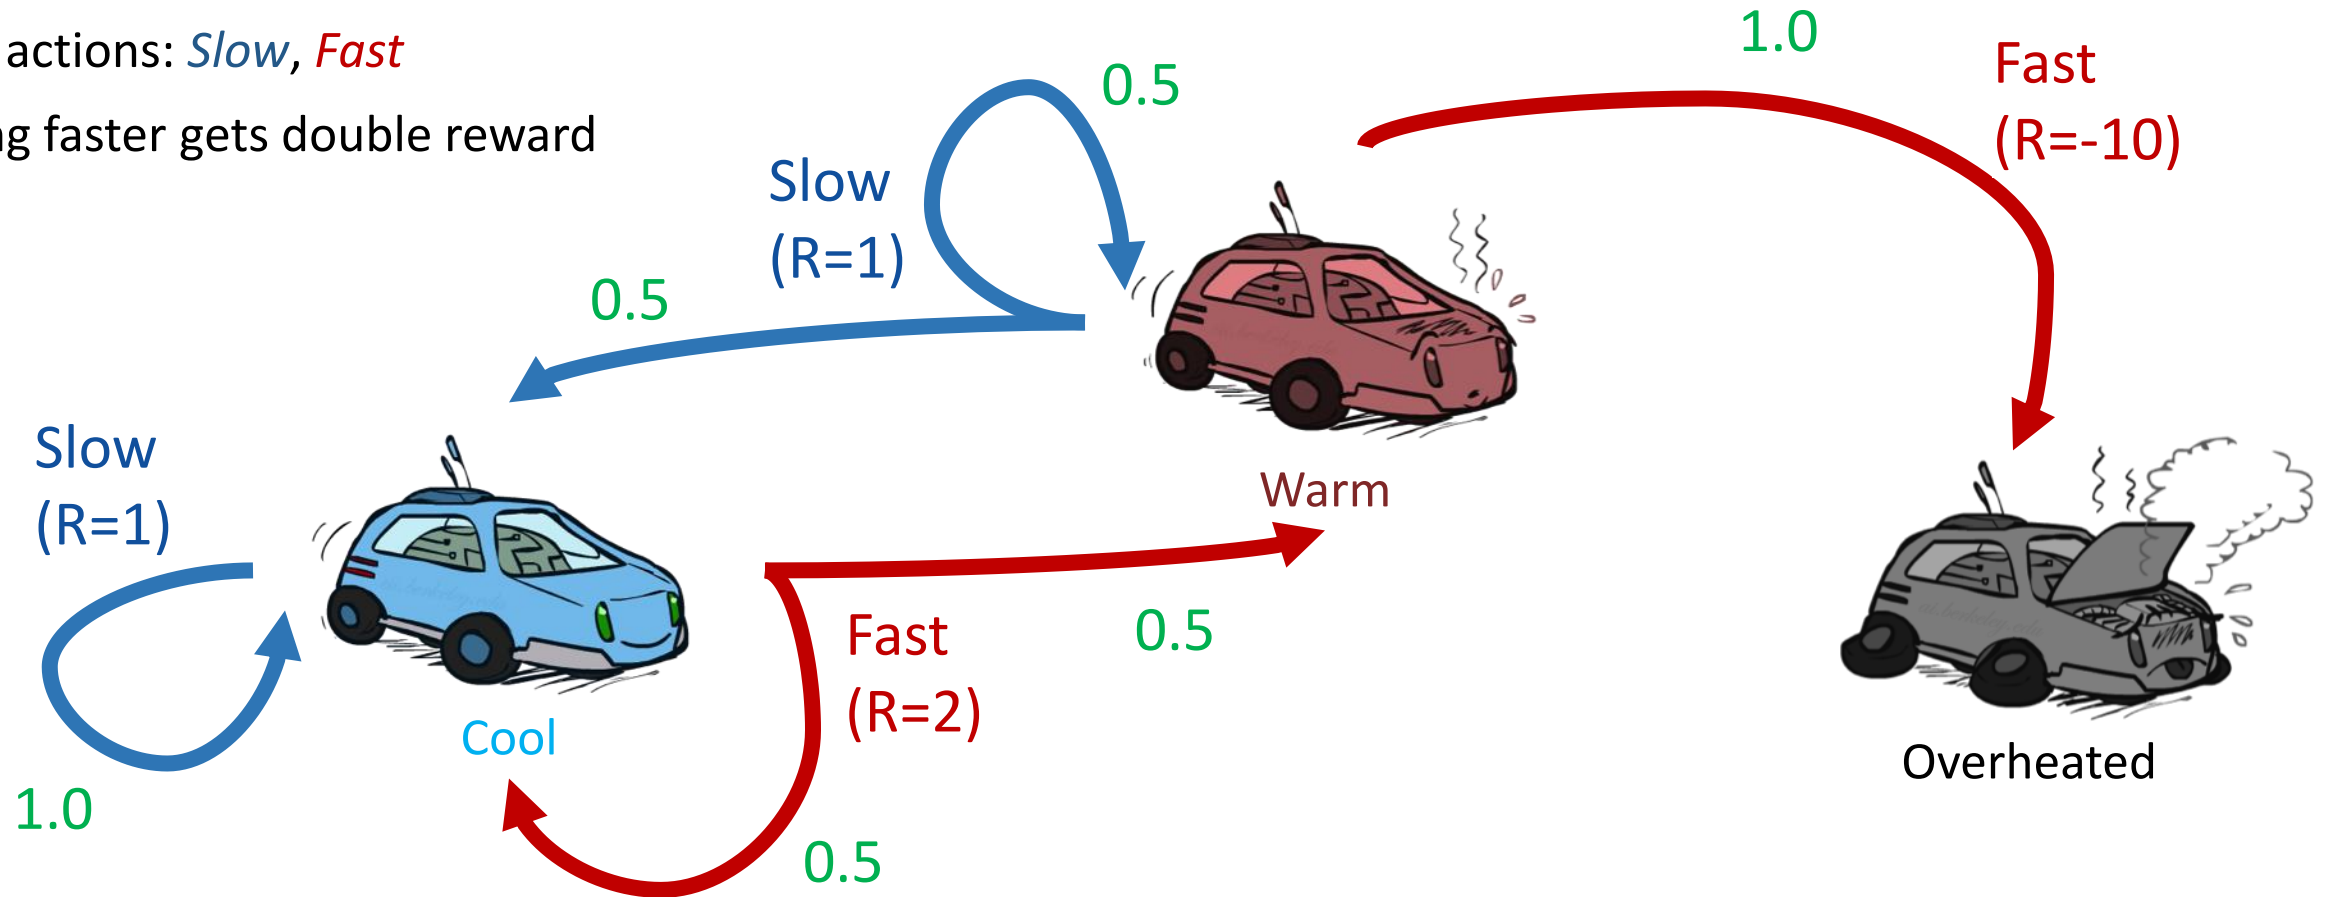


Racing Search Tree

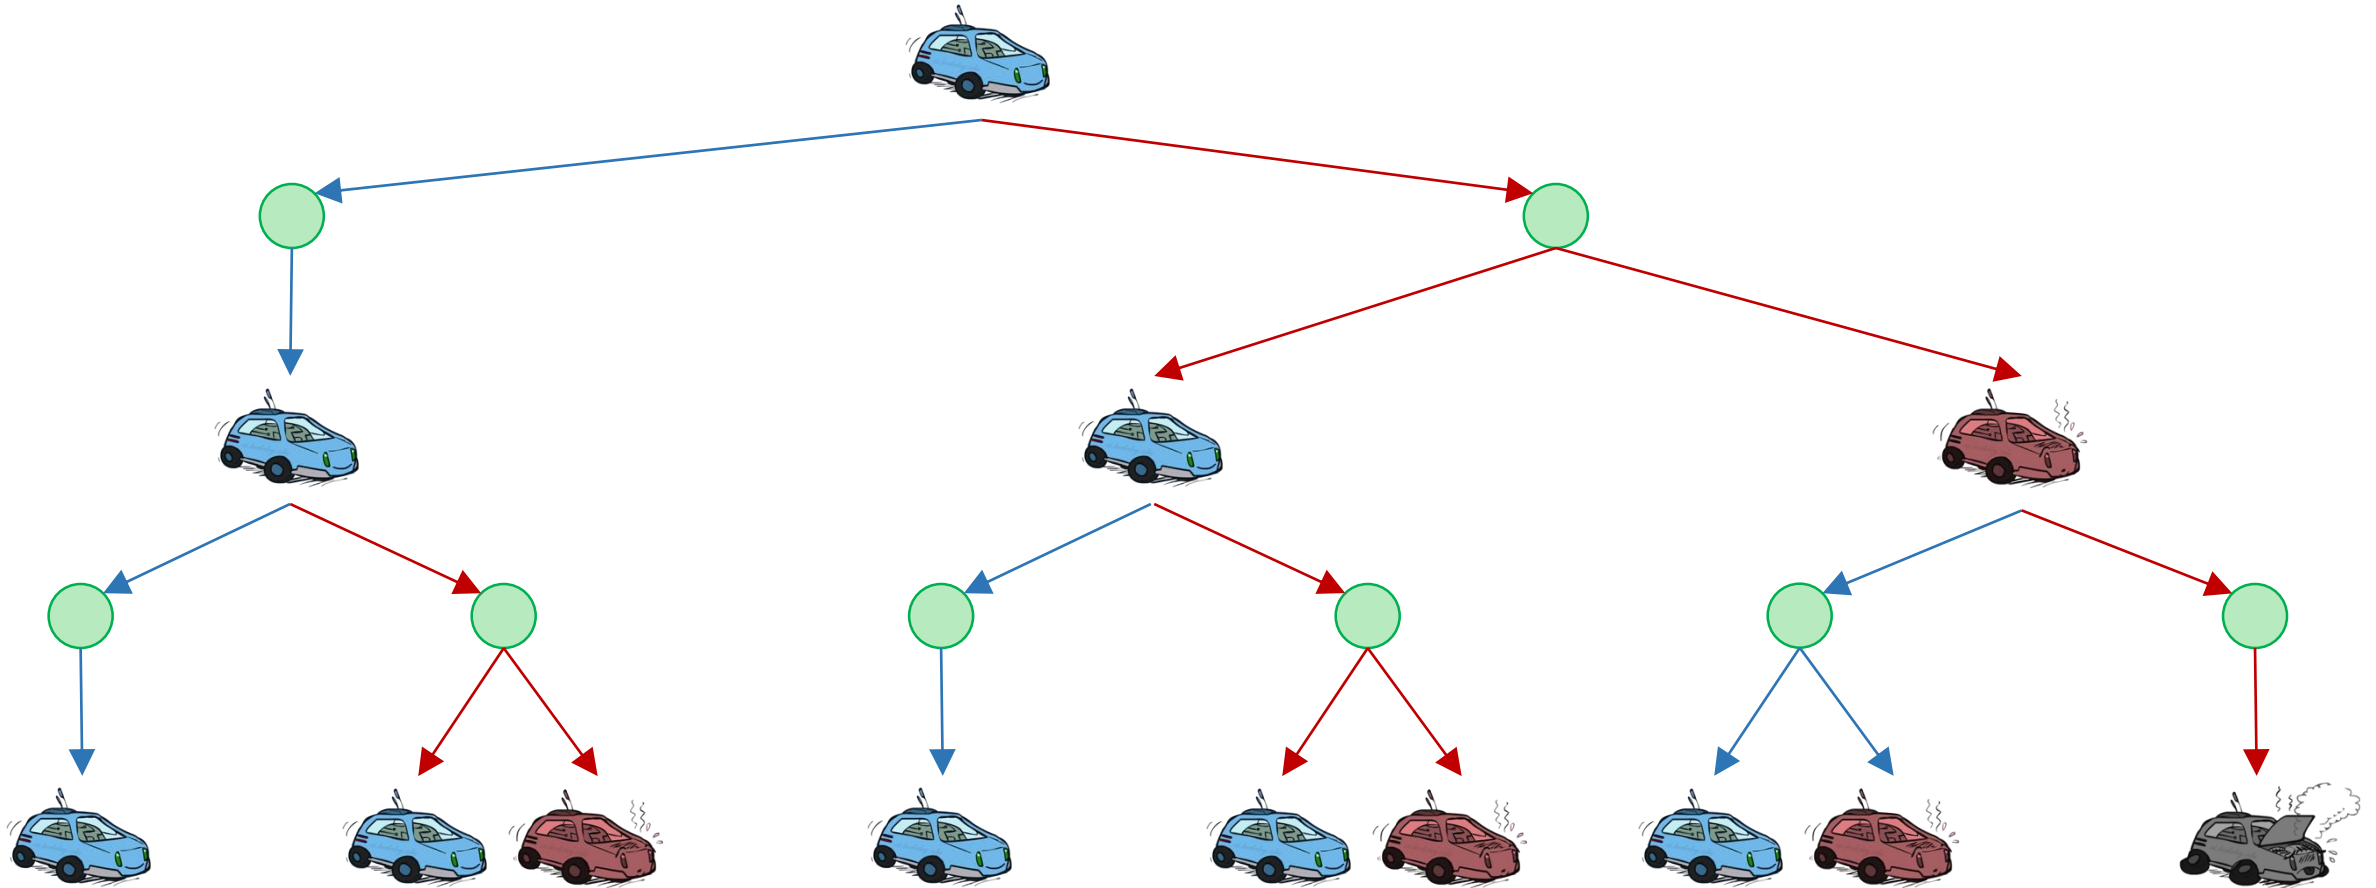

MDP Search Trees

Each MDP state projects an expectimax-like search tree

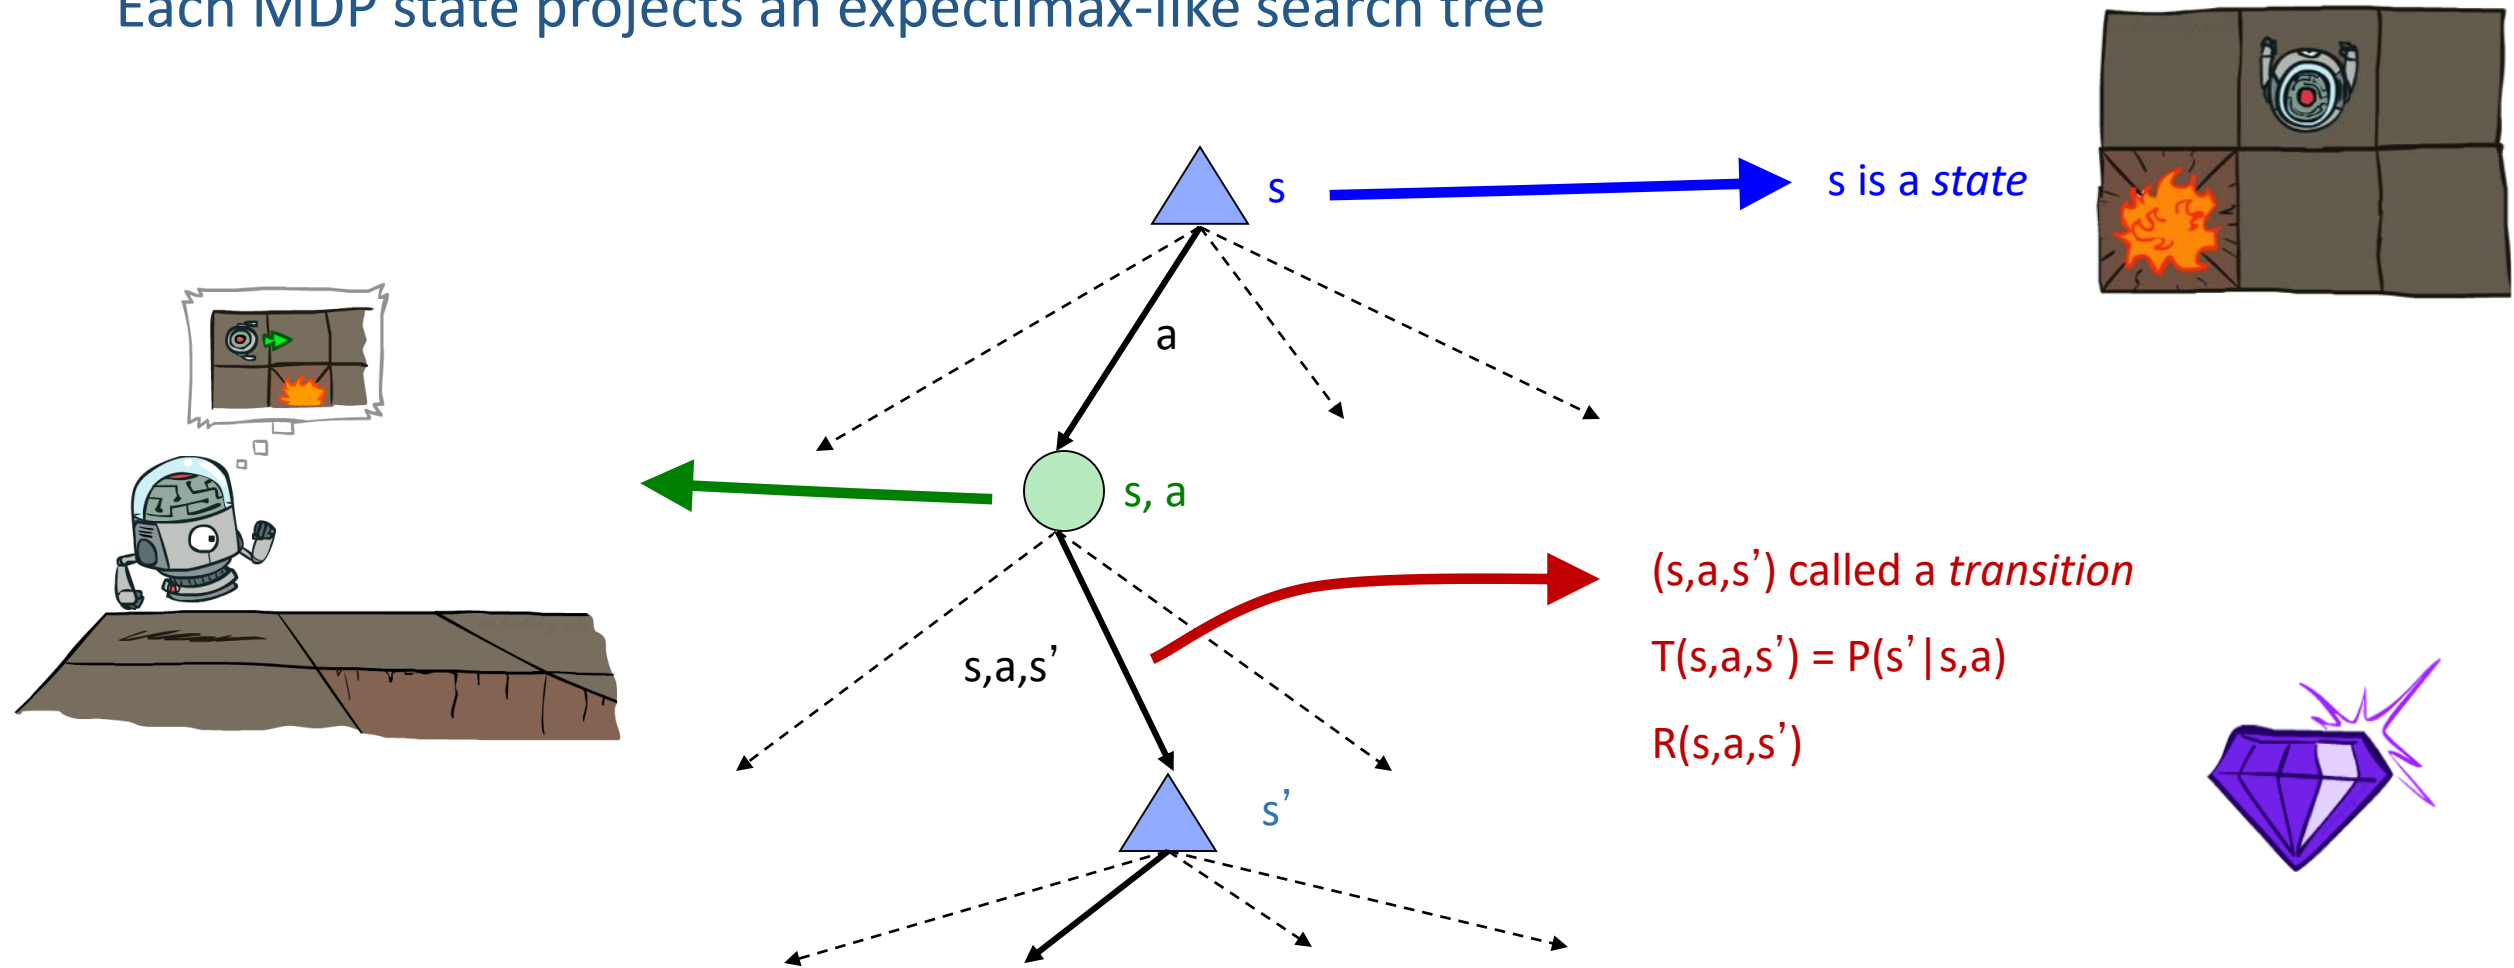


Utilities of Sequences

What preferences should an agent have over reward sequences?

More or less? $[1, 2, 2]$ or $[2, 3, 4]$

Now or later? $[0, 0, 1]$ or $[1, 0, 0]$

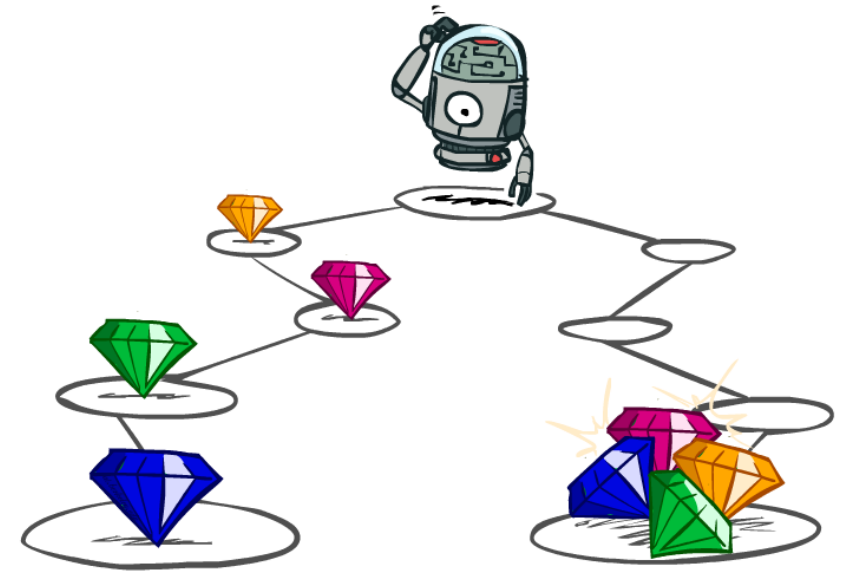

Discounting

It's reasonable to maximize the sum of rewards

It's also reasonable to prefer rewards now to rewards later

One solution: values of rewards decay exponentially



1

Worth Now



γ

Worth Next Step



γ^2

Worth In Two Steps


Discounting

How to discount?

- Each time we descend a level, we multiply in the discount once

Why discount?

- Sooner rewards probably do have higher utility than later rewards
- Also helps our algorithms converge

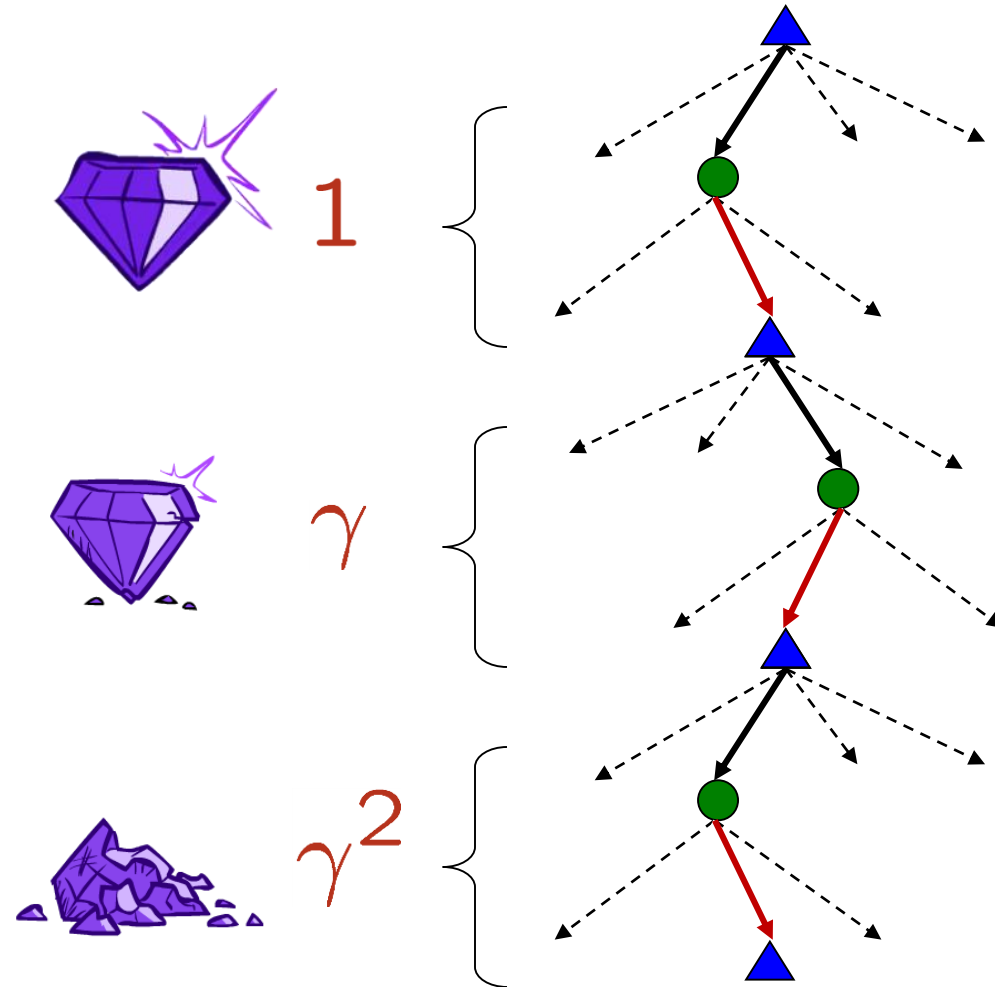

Piazza Poll 3

What is the value of $U[2,4,8]$ with $\gamma = 0.5$?


- A. 3
- B. 6
- C. 7
- D. 14

Bonus: What is the value of $U[8,4,2]$ with $\gamma = 0.5$?

Stationary Preferences

Theorem: if we assume **stationary preferences**:

$$\begin{aligned} [a_1, a_2, \dots] &\succ [b_1, b_2, \dots] \\ &\iff \\ [r, a_1, a_2, \dots] &\succ [r, b_1, b_2, \dots] \end{aligned}$$

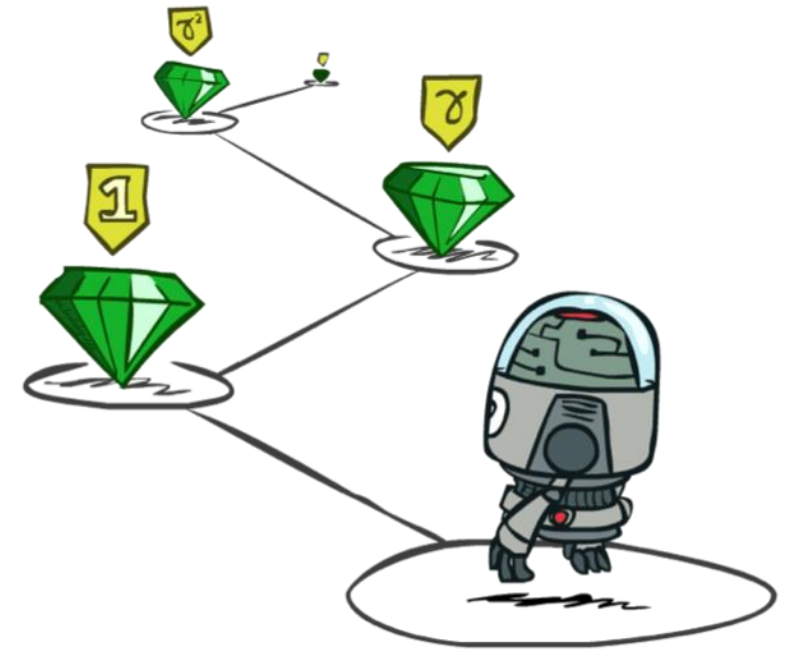

Then: there are only two ways to define utilities

- Additive utility: $U([r_0, r_1, r_2, \dots]) = r_0 + r_1 + r_2 + \dots$
- Discounted utility: $U([r_0, r_1, r_2, \dots]) = r_0 + \gamma r_1 + \gamma^2 r_2 \dots$

Discounting

Given:

10				1
a	b	c	d	e

- Actions: East, West, and Exit (only available in exit states a, e)
- Transitions: deterministic

For $\gamma = 1$, what is the optimal policy?

10				1
----	--	--	--	---

For $\gamma = 0.1$, what is the optimal policy?

10				1
----	--	--	--	---

For which γ are West and East equally good when in state d?

Infinite Utilities?!

- Problem: What if the game lasts forever? Do we get infinite rewards?


- Solutions:

- Finite horizon: (similar to depth-limited search)
 - Terminate episodes after a fixed T steps (e.g. life)
 - Gives nonstationary policies (π depends on time left)

- Discounting: use $0 < \gamma < 1$

$$U([r_0, \dots, r_\infty]) = \sum_{t=0}^{\infty} \gamma^t r_t \leq R_{\max}/(1 - \gamma)$$

- Smaller γ means smaller “horizon” – shorter term focus
- Absorbing state: guarantee that for every policy, a terminal state will eventually be reached (like “overheated” for racing)

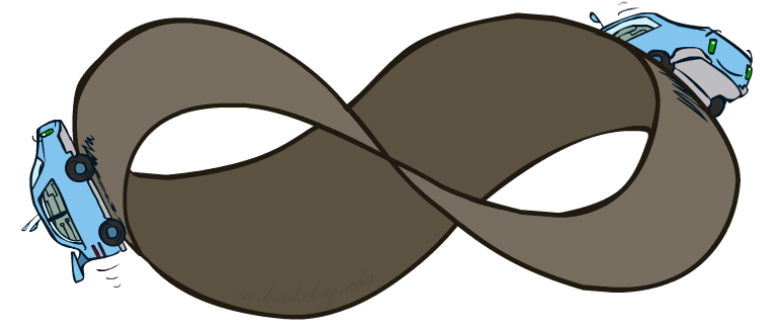


Recap: Defining MDPs

Markov decision processes:


- Set of states S
- Start state s_0
- Set of actions A
- Transitions $P(s' | s, a)$ (or $T(s, a, s')$)
- Rewards $R(s, a, s')$ (and discount γ)

MDP quantities so far:

- Policy = Choice of action for each state
- Utility = sum of (discounted) rewards

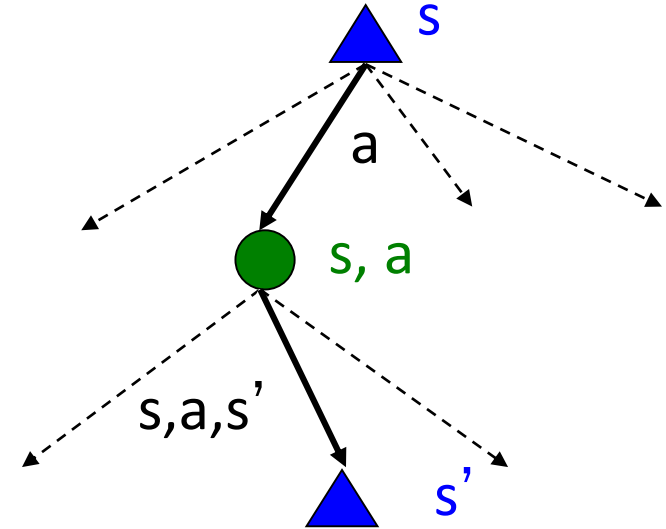


Solving MDPs

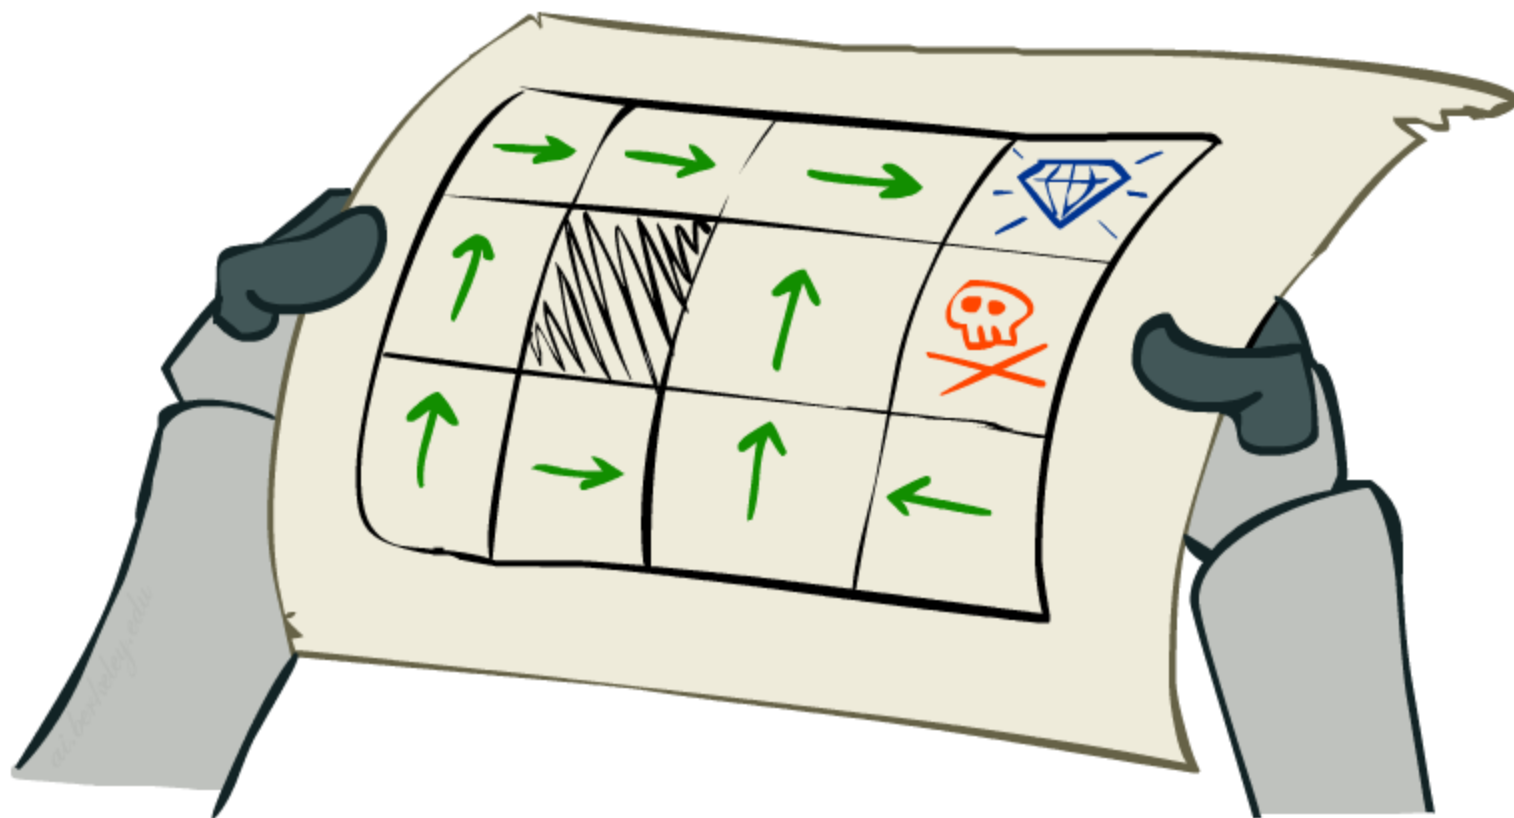


Optimal Quantities

- The value (utility) of a state s :
 $V^*(s)$ = expected utility starting in s and acting optimally
- The value (utility) of a q-state (s,a) :
 $Q^*(s,a)$ = expected utility starting out having taken action a from state s and (thereafter) acting optimally
- The optimal policy:
 $\pi^*(s)$ = optimal action from state s

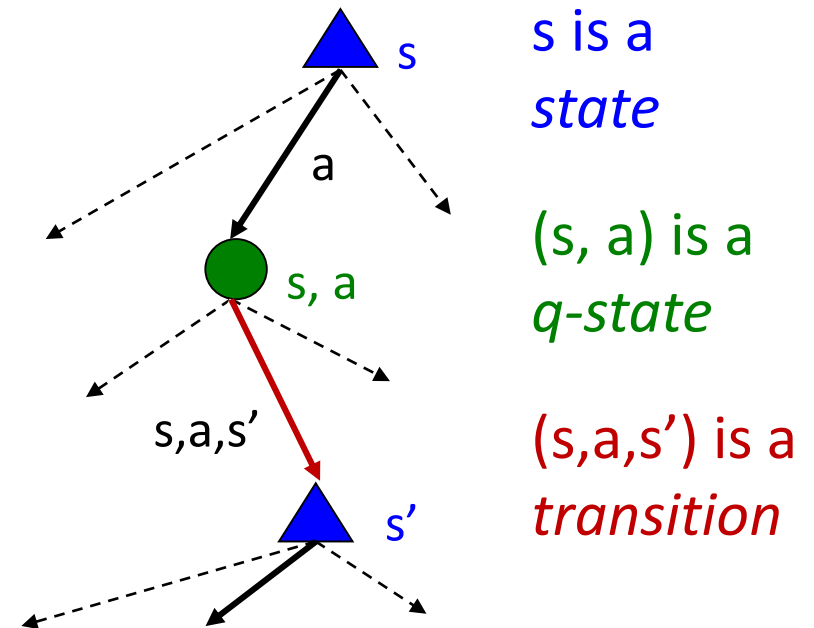


Snapshot of Demo – Gridworld V Values

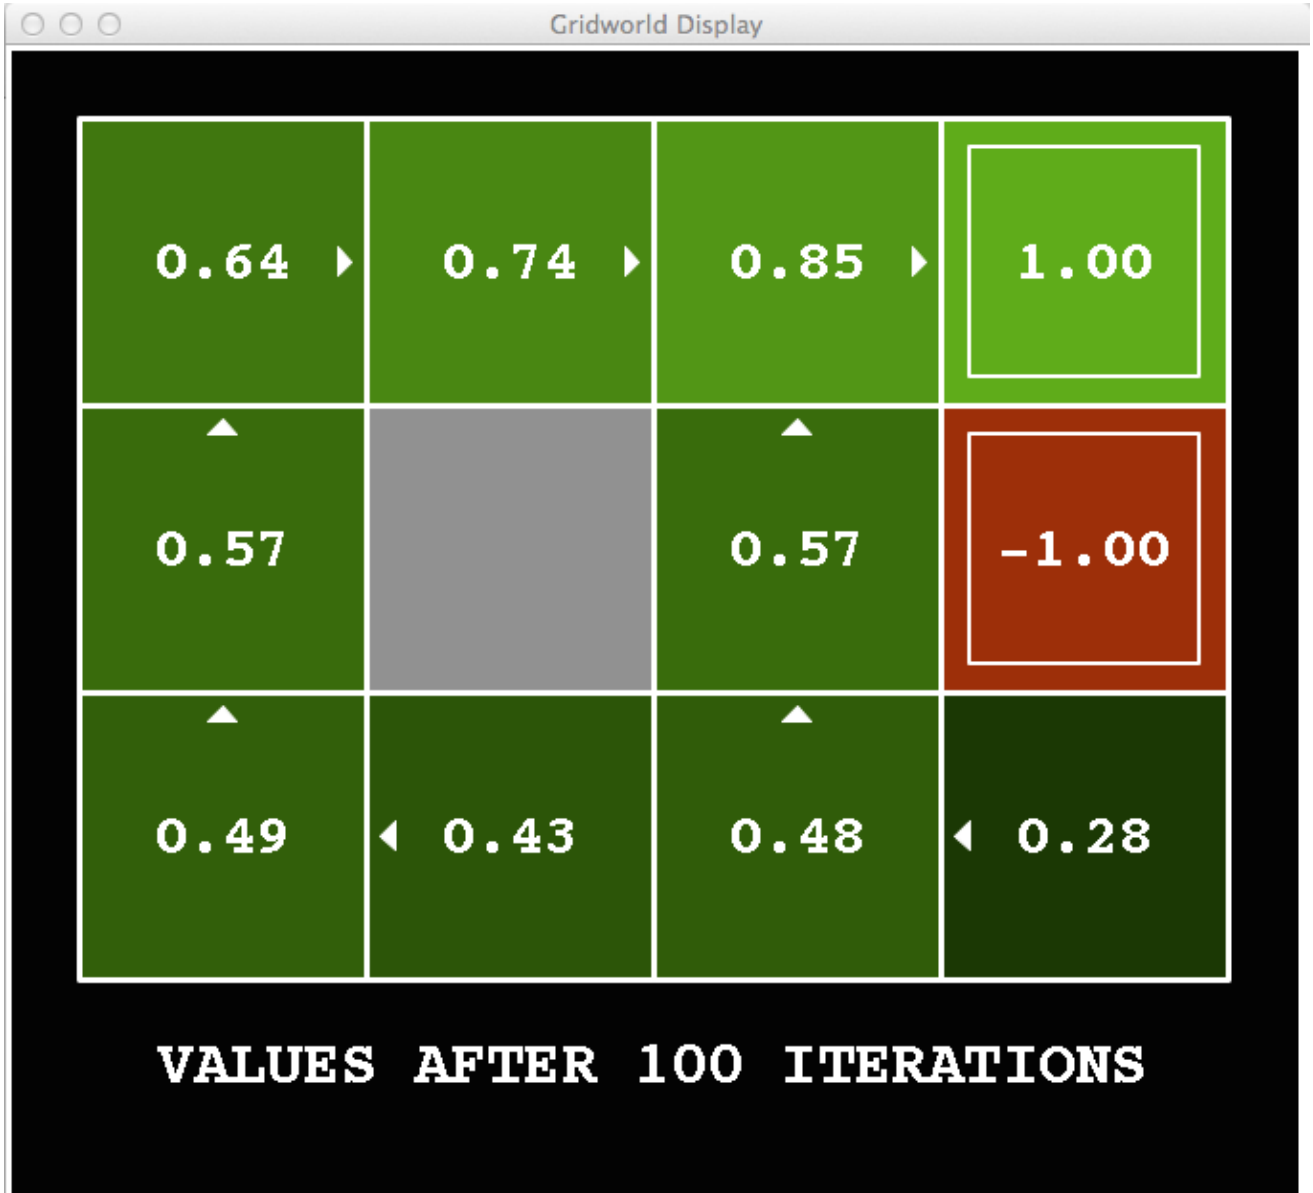

Noise = 0.2
Discount = 0.9
Living reward = 0

Snapshot of Demo – Gridworld Q Values

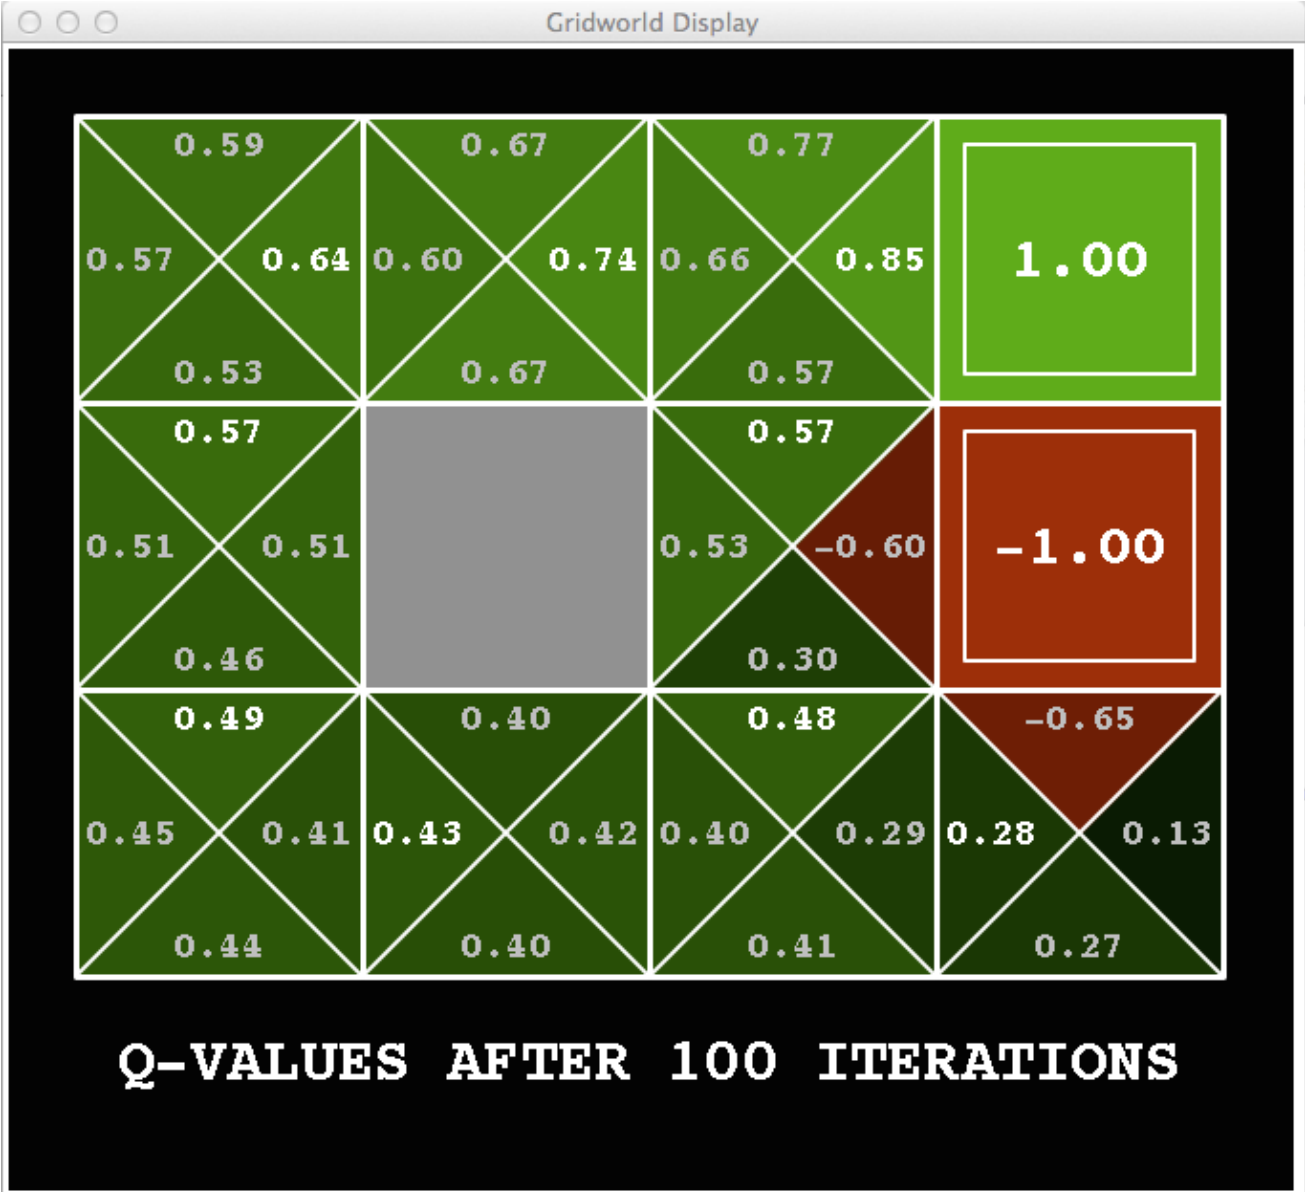

Noise = 0.2
Discount = 0.9
Living reward = 0

Values of States

Fundamental operation: compute the (expectimax) value of a state


- Expected utility under optimal action
- Average sum of (discounted) rewards
- This is just what expectimax computed!

Recursive definition of value:


$$V^*(s) = \max_a Q^*(s, a)$$

$$Q^*(s, a) = \sum_{s'} T(s, a, s') [R(s, a, s') + \gamma V^*(s')]$$


$$V^*(s) = \max_a \sum_{s'} T(s, a, s') [R(s, a, s') + \gamma V^*(s')]$$

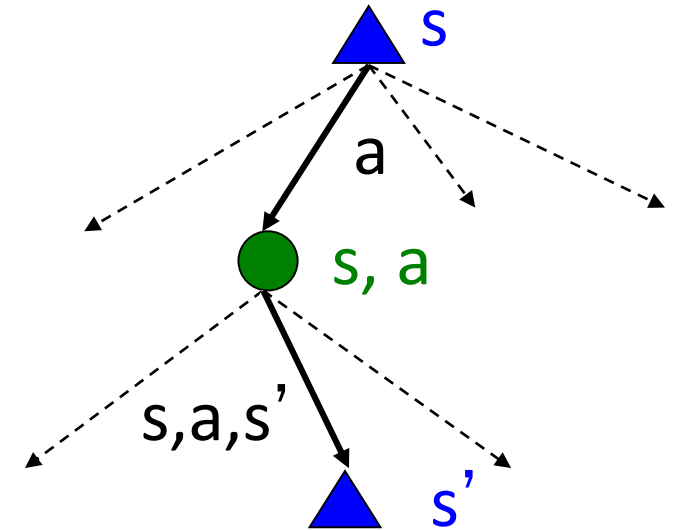

Racing Search Tree

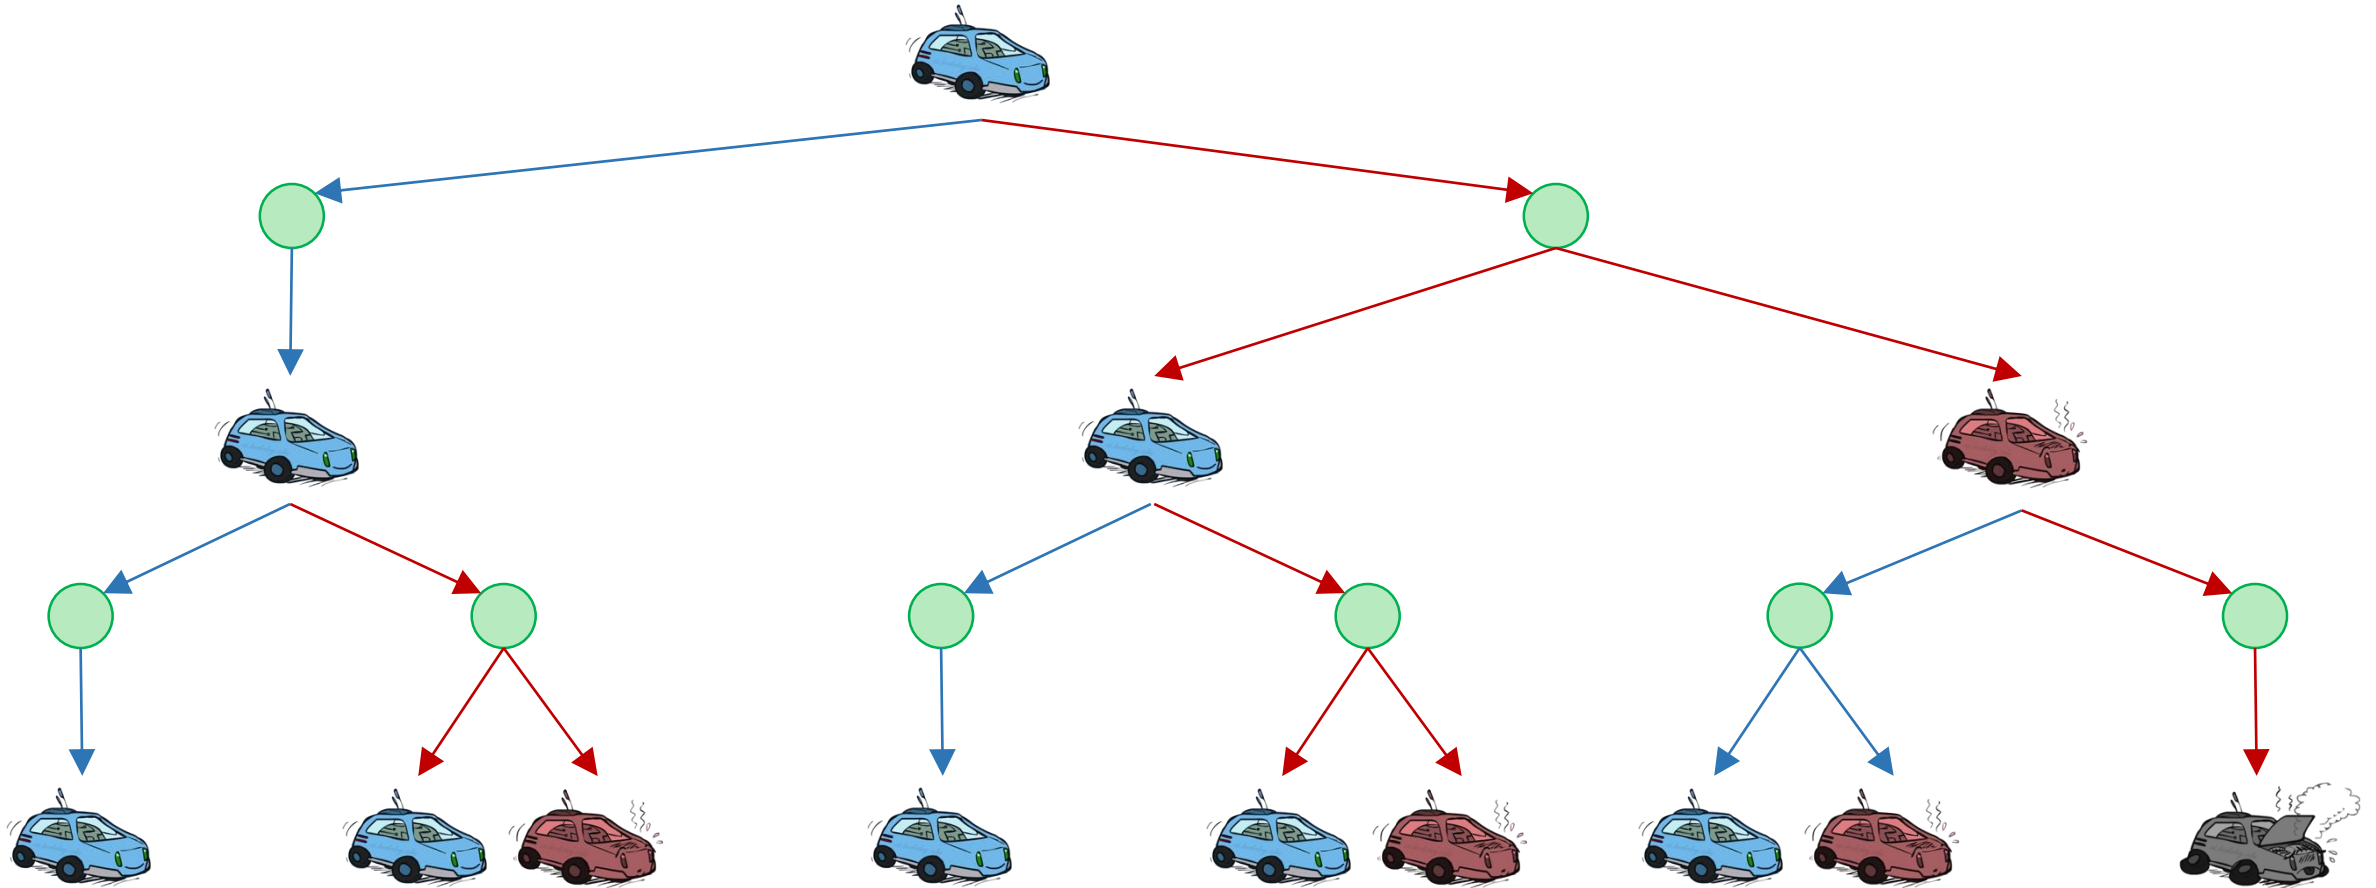

Racing Search Tree

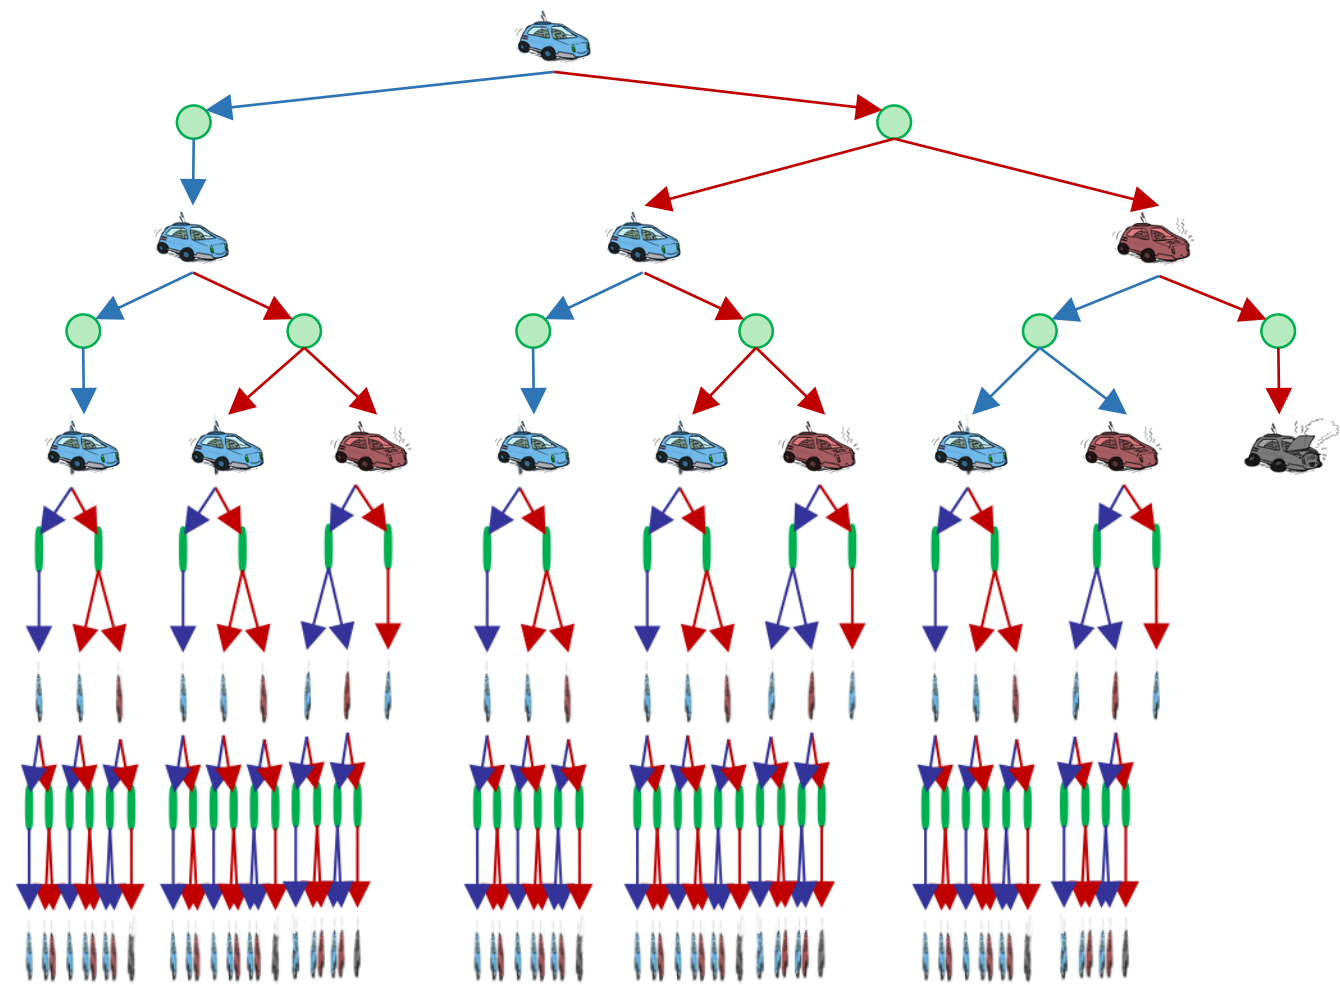

Racing Search Tree


We're doing way too much work with expectimax!

Problem: States are repeated

- Idea: Only compute needed quantities once

Problem: Tree goes on forever

- Idea: Do a depth-limited computation, but with increasing depths until change is small
- Note: deep parts of the tree eventually don't matter if $\gamma < 1$




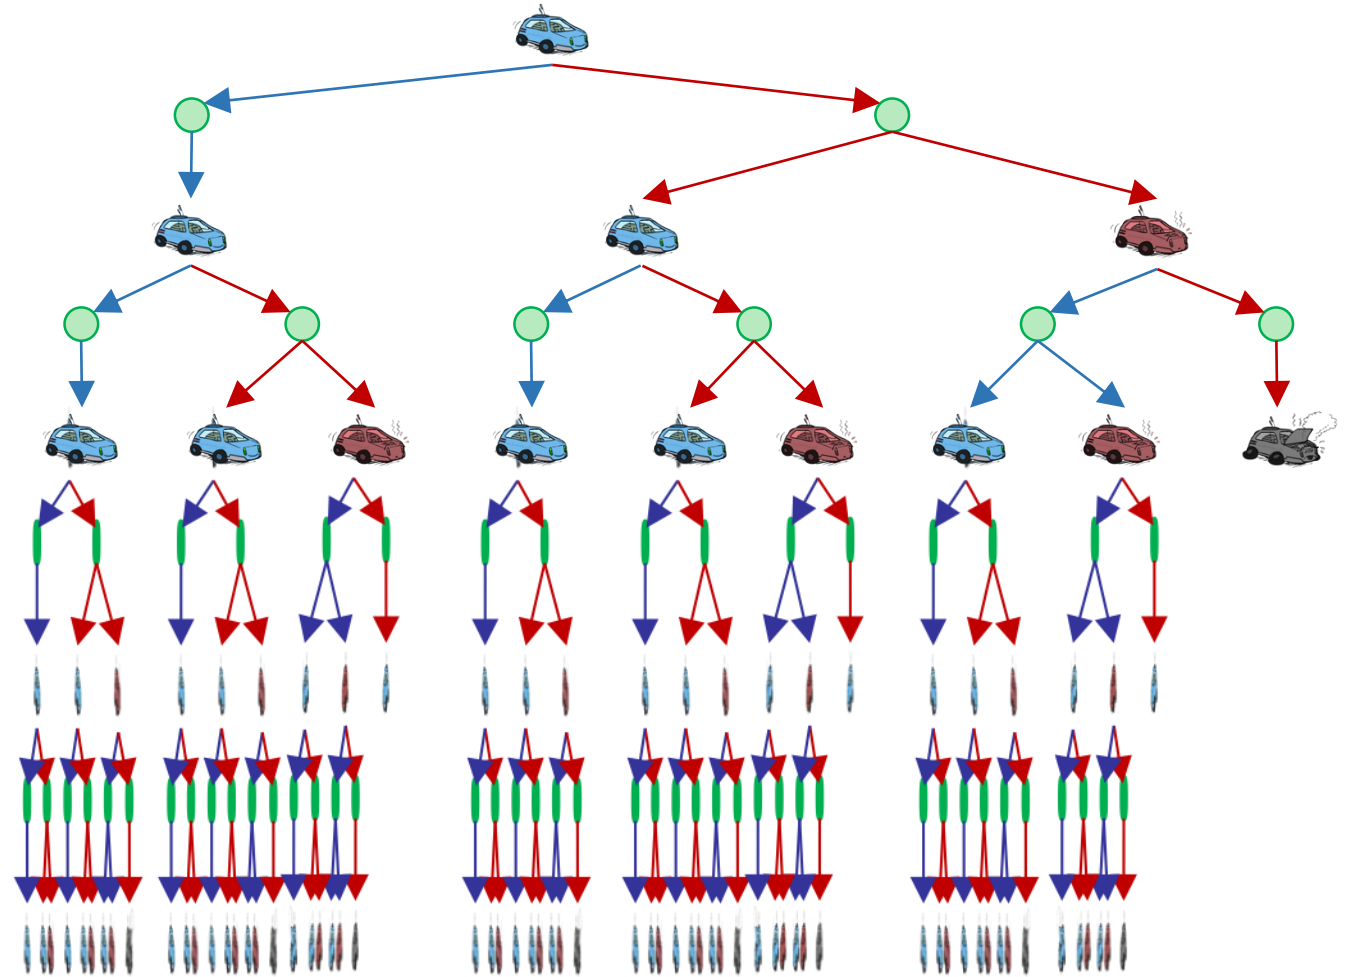


Time-Limited Values


Key idea: time-limited values

Define $V_k(s)$ to be the optimal value of s if the game ends in k more time steps

- Equivalently, it's what a depth- k expectimax would give from s

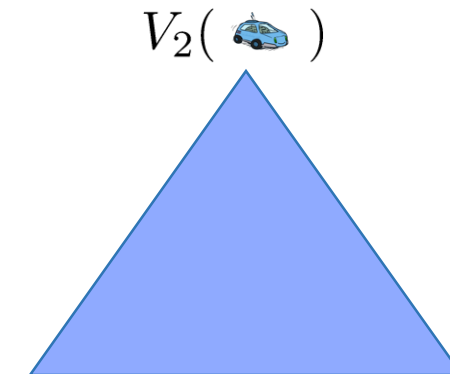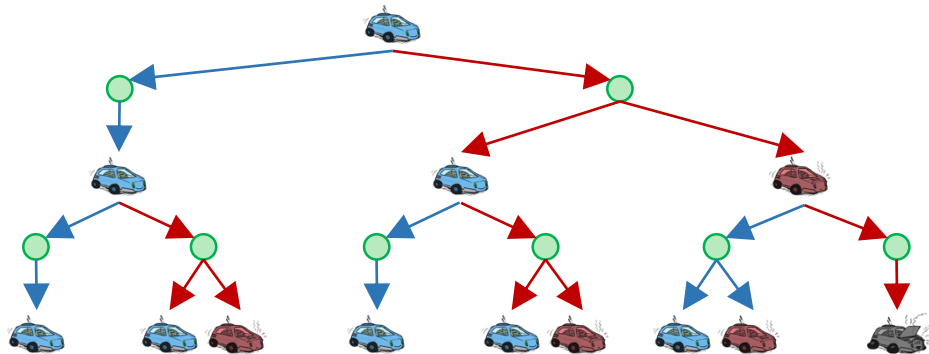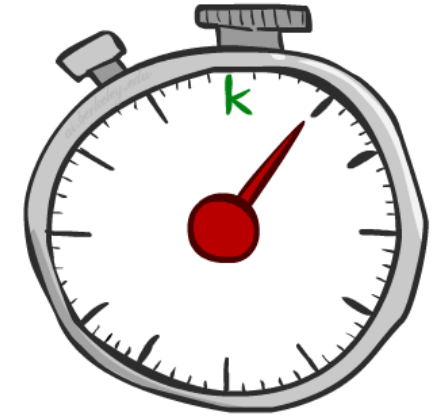

$k=0$

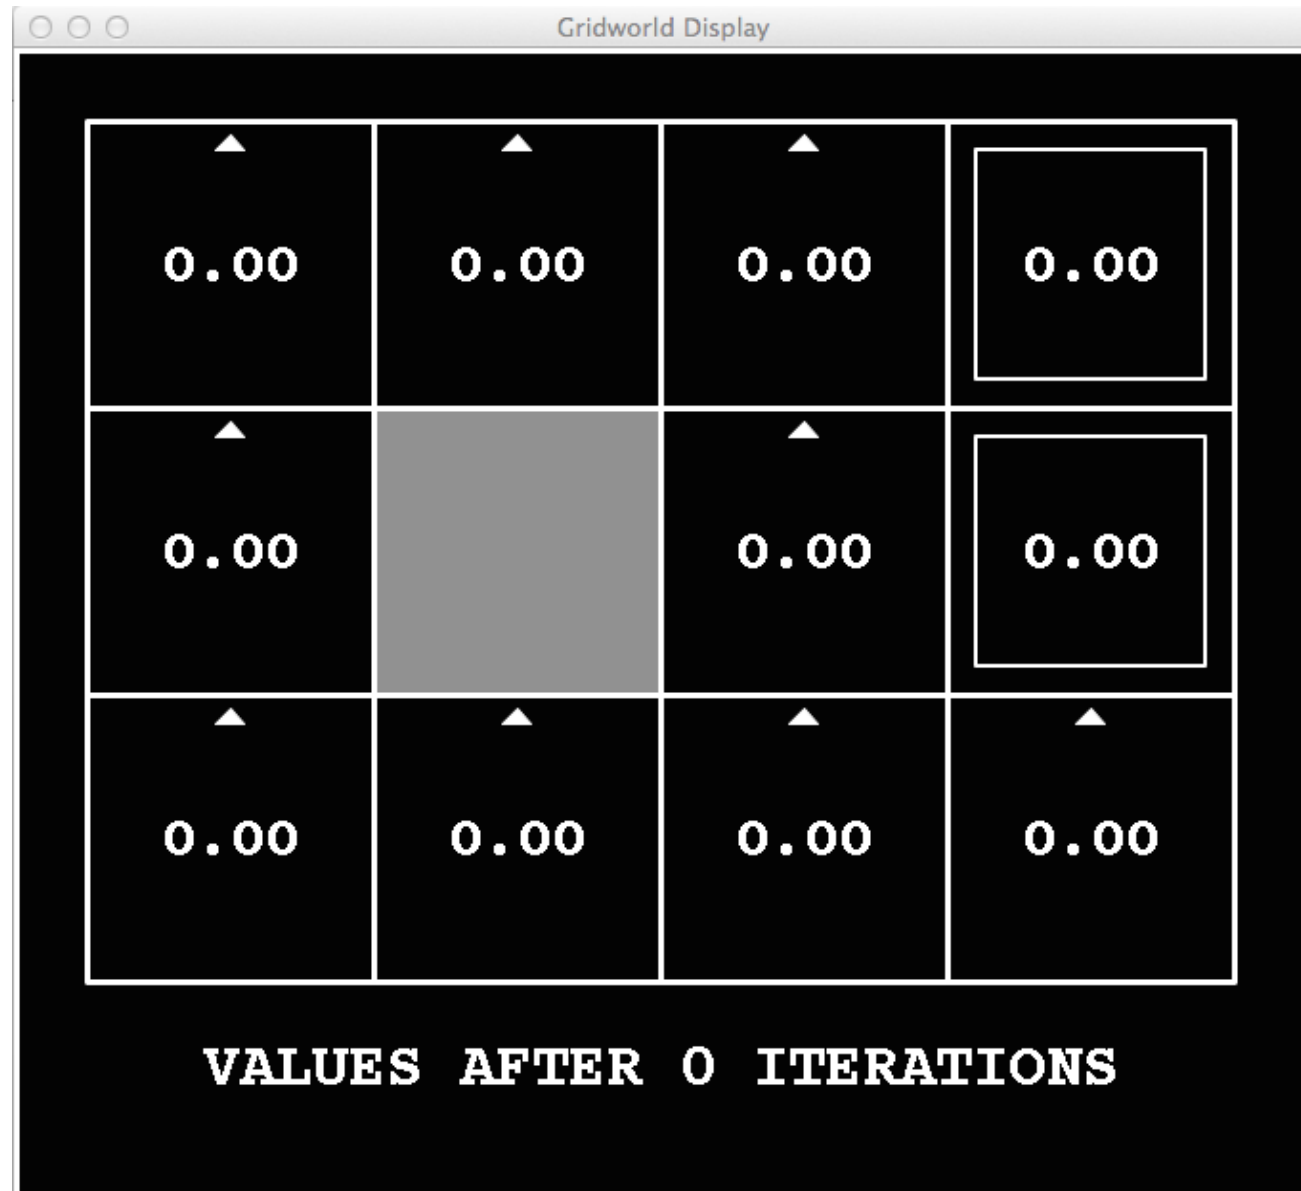

Noise = 0.2
Discount = 0.9
Living reward = 0

$k=1$




Noise = 0.2
Discount = 0.9
Living reward = 0

$k=2$



Noise = 0.2
Discount = 0.9
Living reward = 0

$k=3$

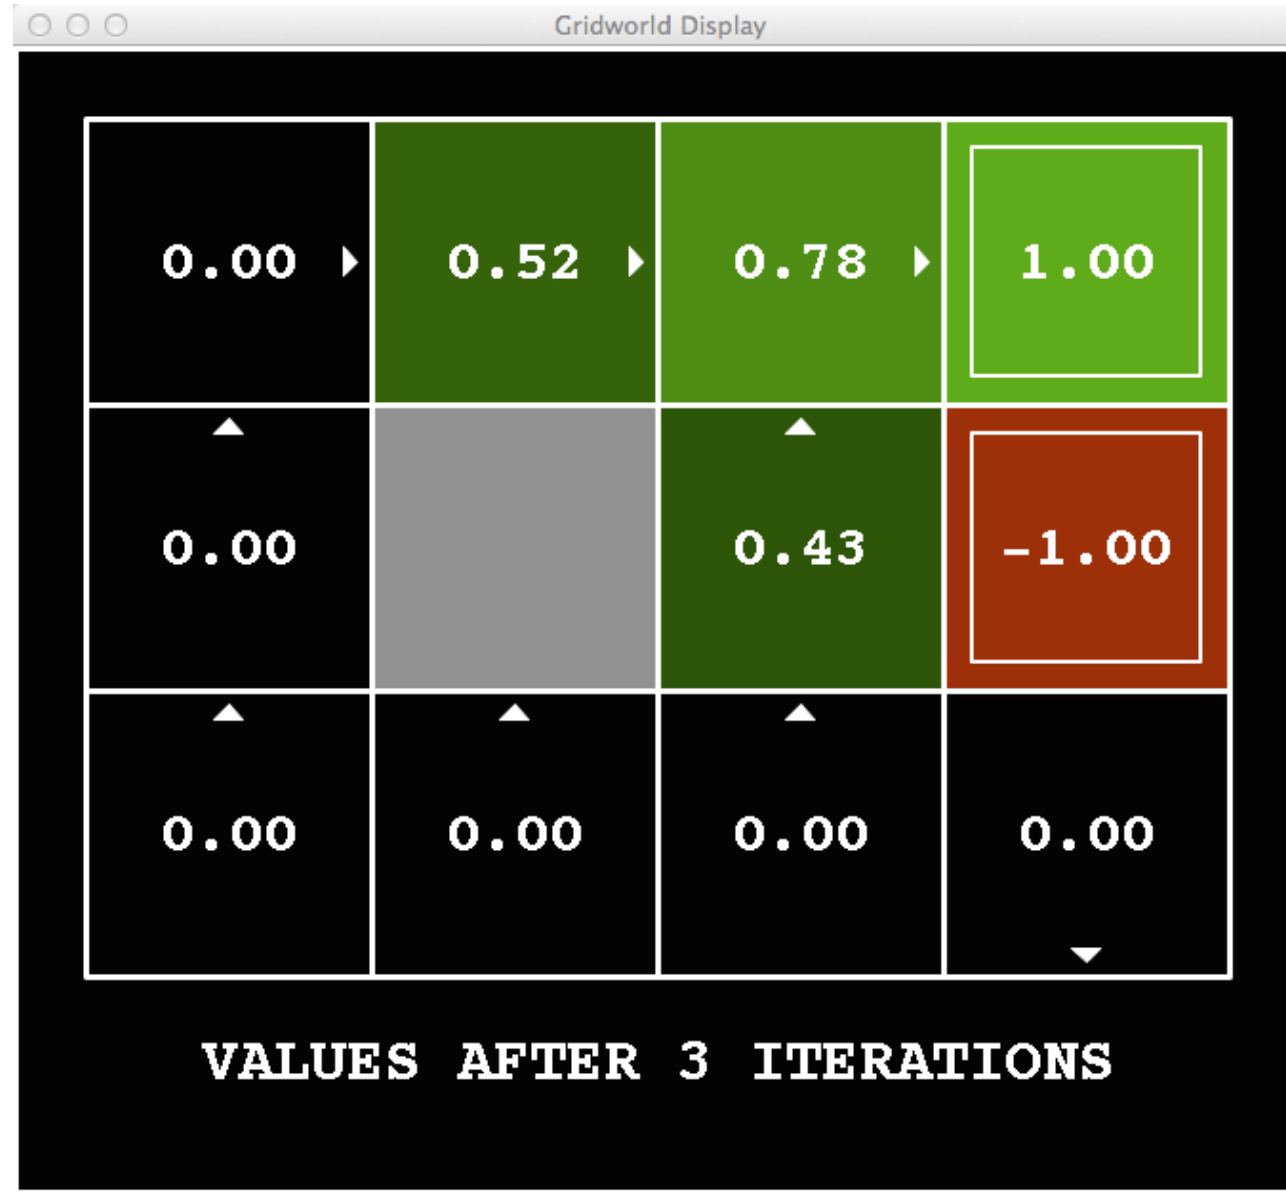

Noise = 0.2
Discount = 0.9
Living reward = 0

$k=4$



Noise = 0.2
Discount = 0.9
Living reward = 0

k=5



Noise = 0.2
Discount = 0.9
Living reward = 0

$$k=6$$


Noise = 0.2
Discount = 0.9
Living reward = 0

$k=7$



Noise = 0.2
Discount = 0.9
Living reward = 0

$k=8$



Noise = 0.2
Discount = 0.9
Living reward = 0

k=9



Noise = 0.2
Discount = 0.9
Living reward = 0

k=10




Noise = 0.2
Discount = 0.9
Living reward = 0

k=11



Noise = 0.2
Discount = 0.9
Living reward = 0

k=12

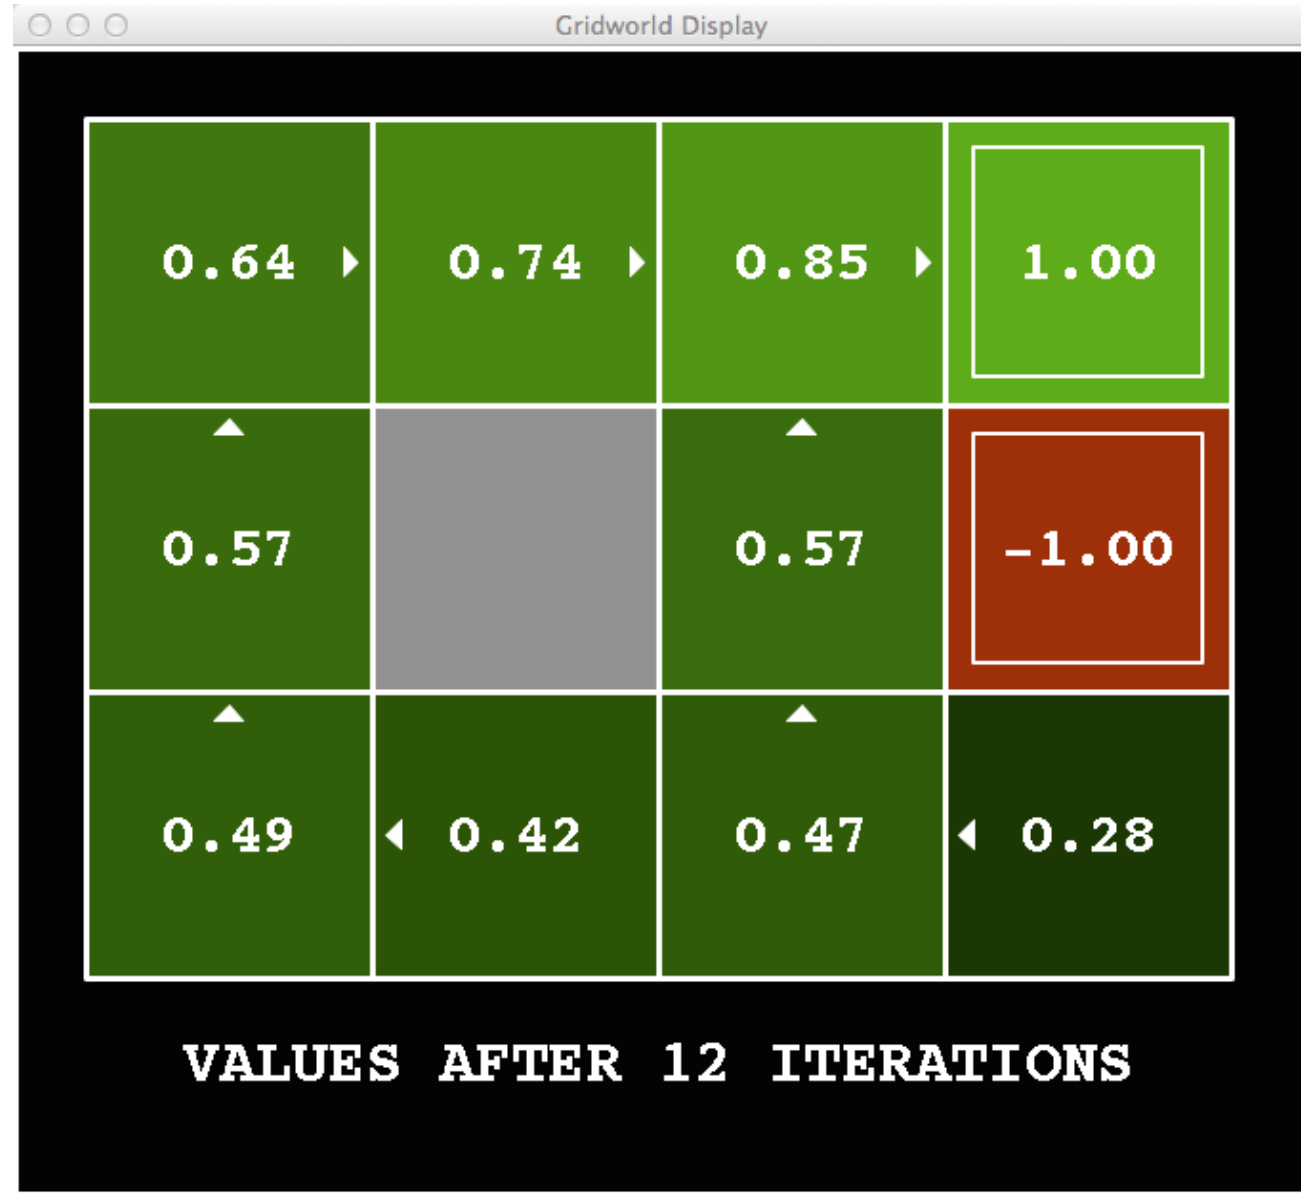


Noise = 0.2
Discount = 0.9
Living reward = 0

k=100




Noise = 0.2
Discount = 0.9
Living reward = 0

Computing Time-Limited Values

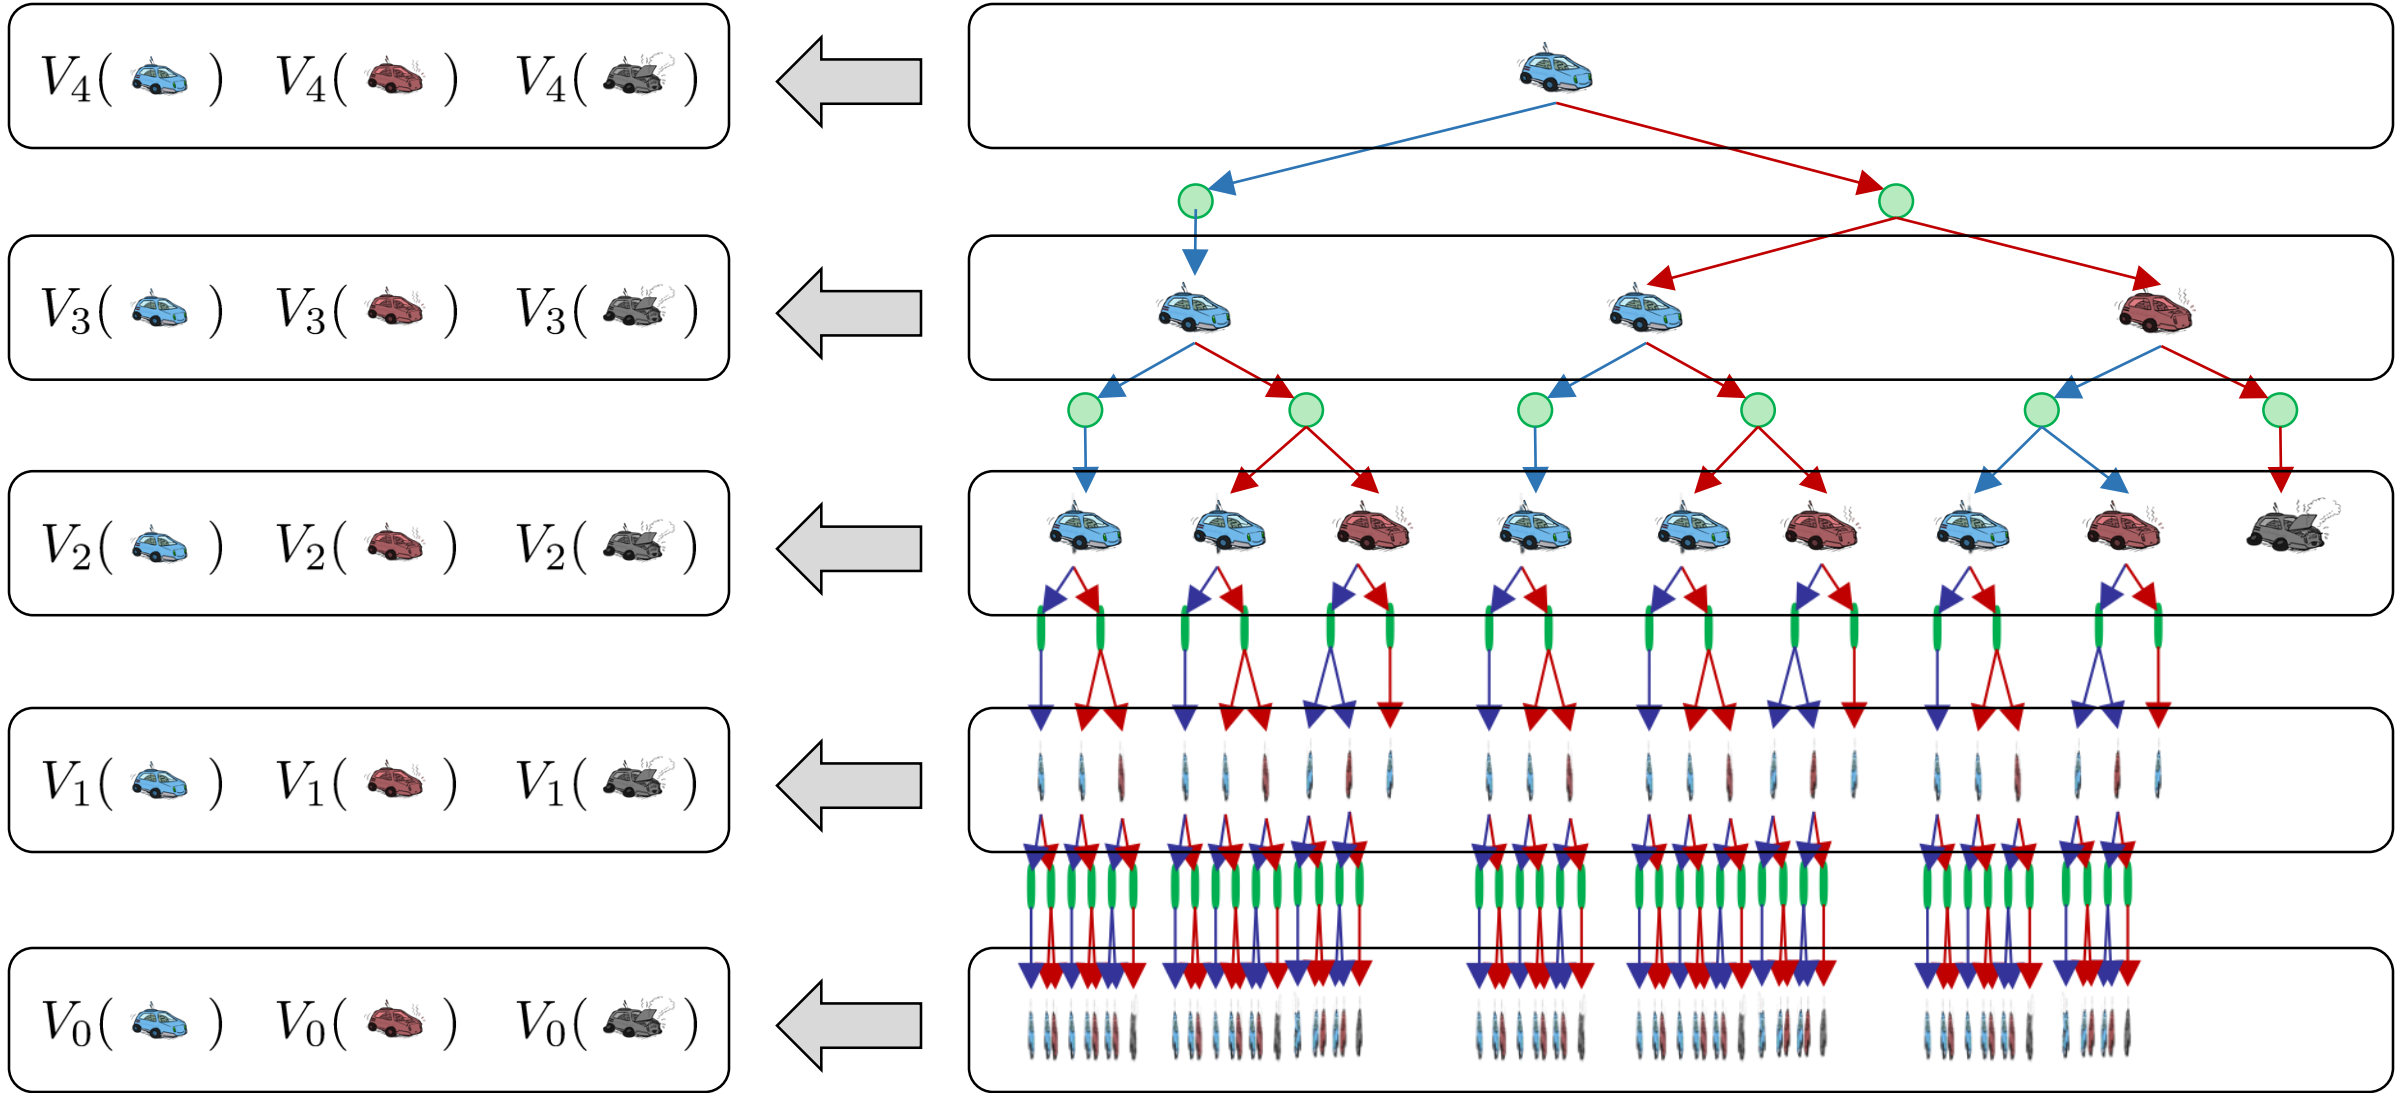

Value Iteration

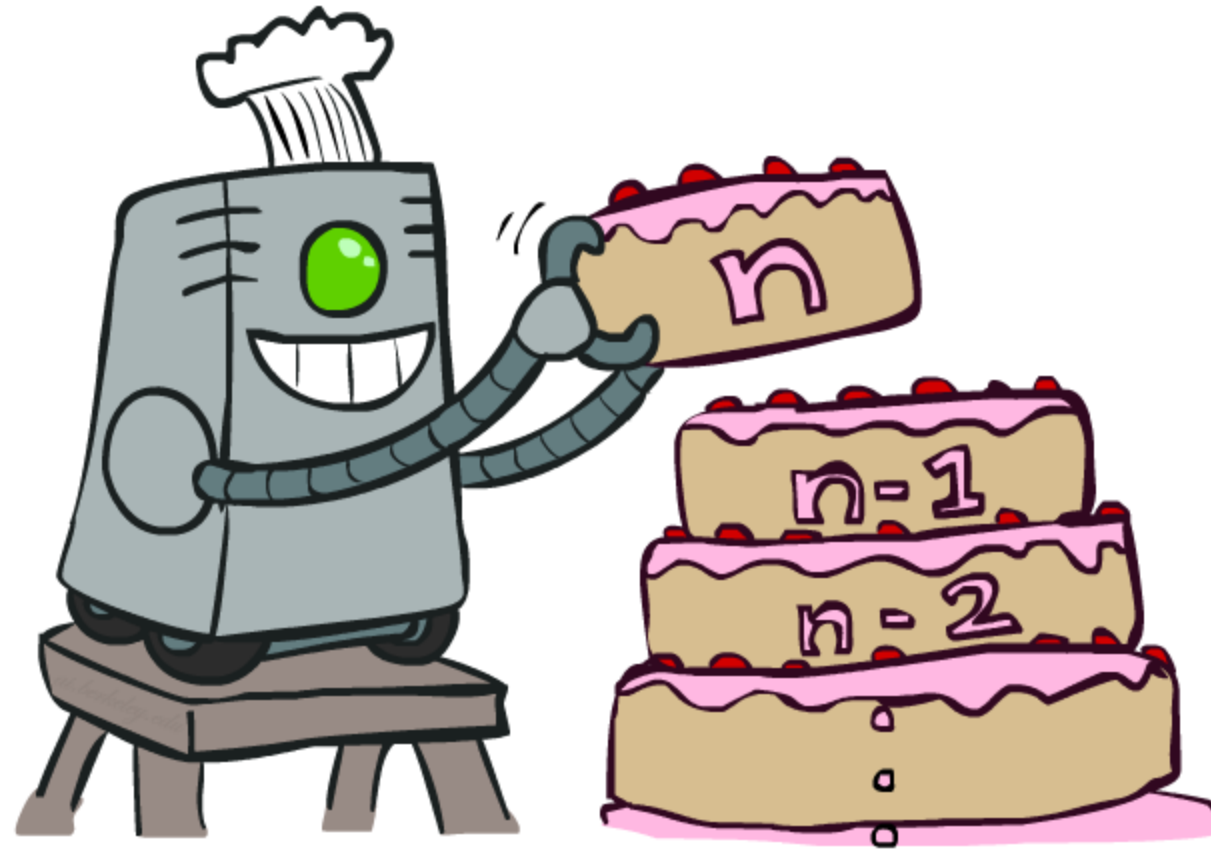

Value Iteration

Start with $V_0(s) = 0$: no time steps left means an expected reward sum of zero

Given vector of $V_k(s)$ values, do one ply of expectimax from each state:


$$V_{k+1}(s) \leftarrow \max_a \sum_{s'} T(s, a, s') [R(s, a, s') + \gamma V_k(s')]$$

Repeat until convergence

Complexity of each iteration: $O(S^2A)$


Theorem: will converge to unique optimal values

- Basic idea: approximations get refined towards optimal values
- Policy may converge long before values do

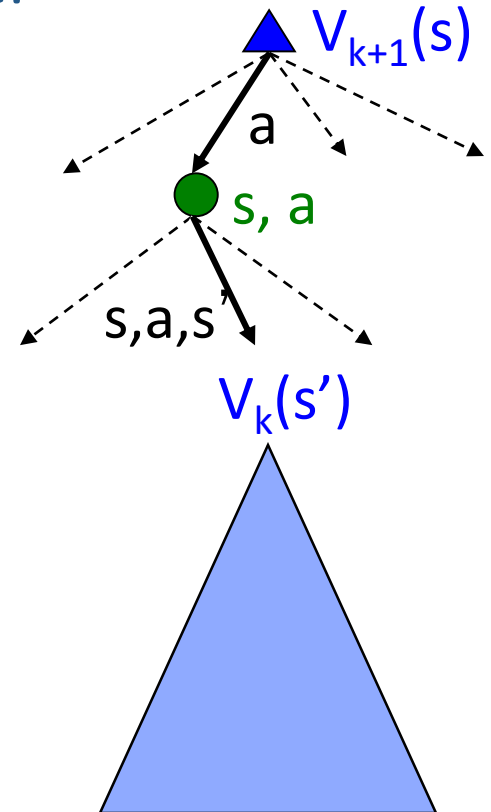

Example: Value Iteration

			
V_2	3.5	2.5	0
V_1	2	1	0
V_0	0	0	0

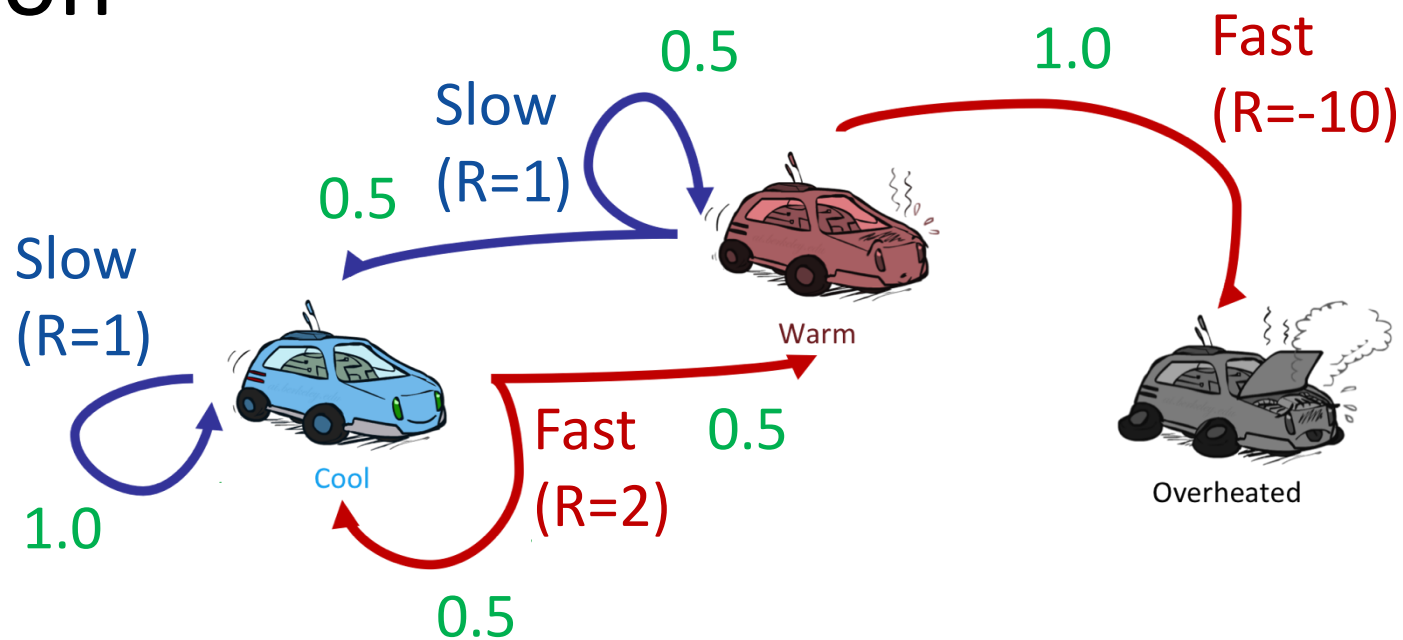

Assume no discount!

$$V_{k+1}(s) \leftarrow \max_a \sum_{s'} T(s, a, s') [R(s, a, s') + \gamma V_k(s')]$$


Convergence

How do we know the V_k vectors are going to converge?

Case 1: If the tree has maximum depth M , then V_M holds the actual untruncated values

Case 2: If the discount is less than 1

- Sketch: For any state V_k and V_{k+1} can be viewed as depth $k+1$ expectimax results in nearly identical search trees
- The difference is that on the bottom layer, V_{k+1} has actual rewards while V_k has zeros
- That last layer is at best all R_{MAX}
- It is at worst R_{MIN}
- But everything is discounted by γ^k that far out
- So V_k and V_{k+1} are at most $\gamma^k \max |R|$ different
- So as k increases, the values converge

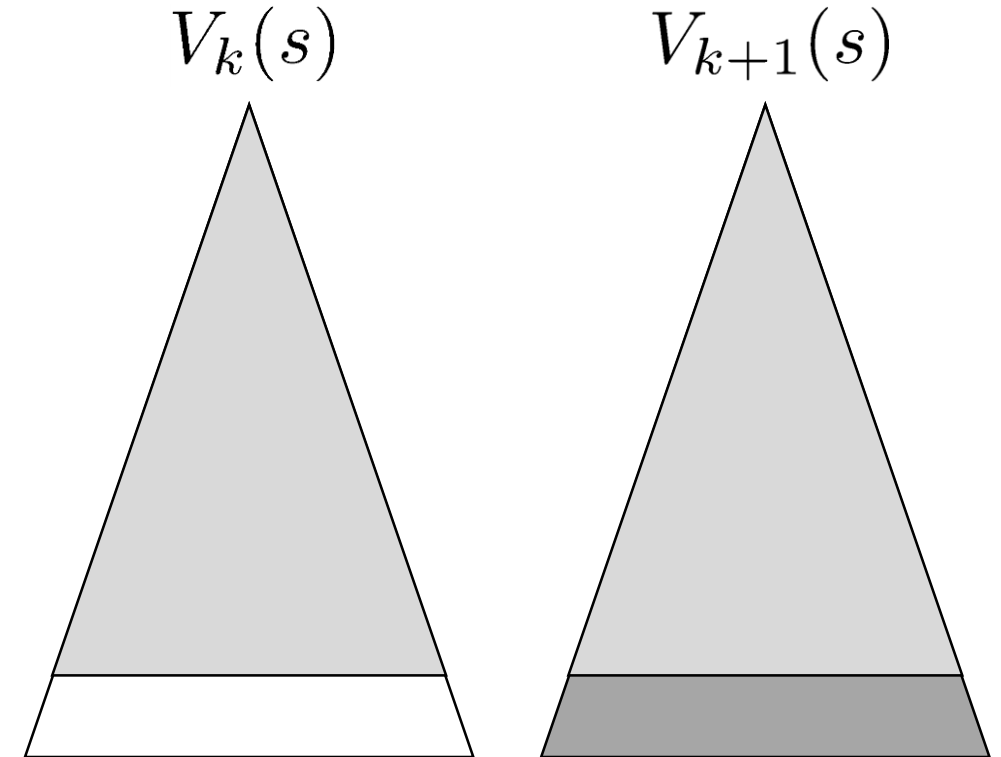

MDP Notation

Standard expectimax:
$$V(s) = \max_a \sum_{s'} P(s'|s, a) V(s')$$

Bellman equations:
$$V(s) = \max_a \sum_{s'} P(s'|s, a) [R(s, a, s') + \gamma V(s')]$$

Value iteration:
$$V_{k+1}(s) = \max_a \sum_{s'} P(s'|s, a) [R(s, a, s') + \gamma V_k(s')], \quad \forall s$$

Q-iteration:
$$Q_{k+1}(s, a) = \sum_{s'} P(s'|s, a) [R(s, a, s') + \gamma \max_{a'} Q_k(s', a')], \quad \forall s, a$$

Policy extraction:
$$\pi_V(s) = \operatorname{argmax}_a \sum_{s'} P(s'|s, a) [R(s, a, s') + \gamma V(s')], \quad \forall s$$

Policy evaluation:
$$V_{k+1}^\pi(s) = \sum_{s'} P(s'|s, \pi(s)) [R(s, \pi(s), s') + \gamma V_k^\pi(s')], \quad \forall s$$

Policy improvement:
$$\pi_{new}(s) = \operatorname{argmax}_a \sum_{s'} P(s'|s, a) [R(s, a, s') + \gamma V^{\pi_{old}}(s')], \quad \forall s$$

MDP Notation

Standard expectimax: $V(s) = \max_a \sum_{s'} P(s'|s, a) V(s')$

Bellman equations: $V(s) = \max_a \sum_{s'} P(s'|s, a) [R(s, a, s') + \gamma V(s')]$

Value iteration: $V_{k+1}(s) = \max_a \sum_{s'} P(s'|s, a) [R(s, a, s') + \gamma V_k(s')], \quad \forall s$

Q-iteration: $Q_{k+1}(s, a) = \sum_{s'} P(s'|s, a) [R(s, a, s') + \gamma \max_{a'} Q_k(s', a')], \quad \forall s, a$

Policy extraction: $\pi_V(s) = \operatorname{argmax}_a \sum_{s'} P(s'|s, a) [R(s, a, s') + \gamma V(s')], \quad \forall s$

Policy evaluation: $V_{k+1}^\pi(s) = \sum_{s'} P(s'|s, \pi(s)) [R(s, \pi(s), s') + \gamma V_k^\pi(s')], \quad \forall s$

Policy improvement: $\pi_{new}(s) = \operatorname{argmax}_a \sum_{s'} P(s'|s, a) [R(s, a, s') + \gamma V^{\pi_{old}}(s')], \quad \forall s$

Next Time: Policy-Based Methods