

Version Control with Git

Harshad Shirwadkar(harshad@cmu.edu)

15-441 Computer Networks

Recitation 2



What is version control?

- Revisit previous code versions
- Backup projects
- Work with others
- Find where things broke



Version Control Workflow

- **Check** for any remote updates
- **Do** your work
- **Test** your work
- **Check** differences, try to isolate changes
- **Check** for any remote updates
- **Commit** your work



Options

- Git
- Subversion (svn)
- Mercurial (hg)
- Bazaar (bzd)
- CVS
- ~~Dropbox~~
- Others...



svn

Usually
remotely
hosted,
shared with a
team.

svn commit



svn checkout
svn update



Your **private**
universe,
before
commit.



git

git
push



git
push



No notion of “working
copy”—each
is a full repository.

git pull



git push



git pull


git pull

git pull



git pull



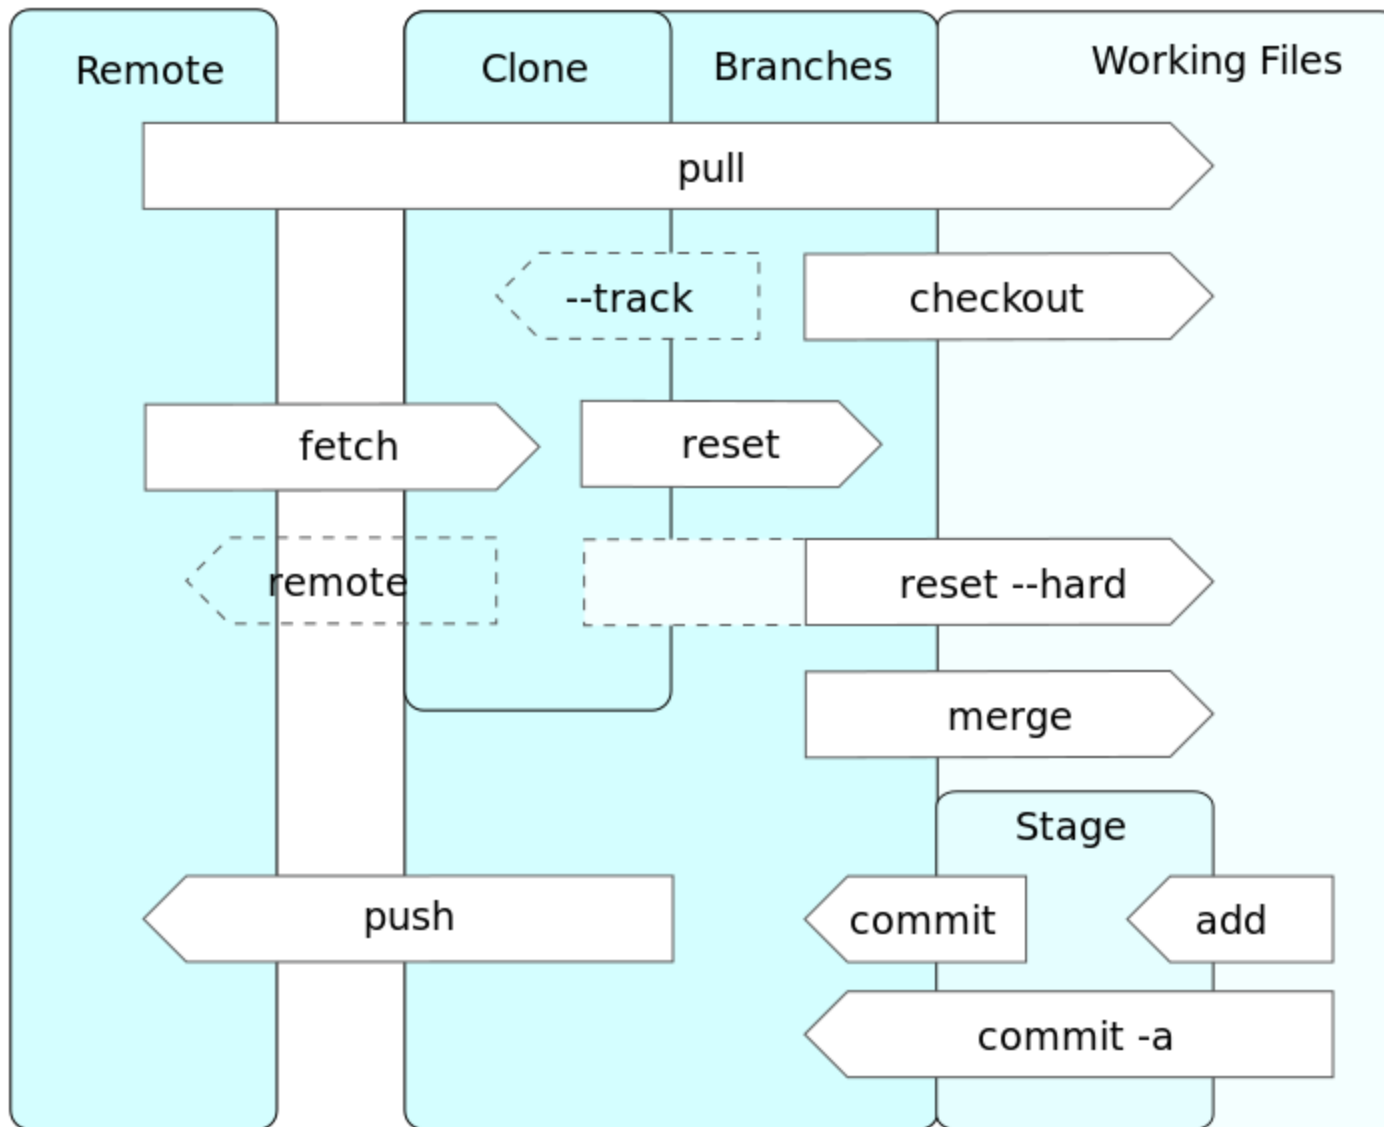

Creating a Repository (repo)

Create locally

```
git init .
```

Create remote

```
git init --bare
```

Clone local copy

```
git clone git://path/to/repo
```



--bare or not?

- No-bare
 - Creates a repository in your working directory
 - Don't need to create multiple copies of your repo
 - Won't help if you nuke the directory/disk
 - This is probably what you need if you'll work in AFS
- --bare
 - Creates a “server copy” for hosting the project
 - Workflow more similar to svn (but still better)
 - Everyone pushes to shared bare repo (like svn)
 - You don't work in this copy; must clone elsewhere
 - You want this to develop on your PC



Aside: network protocols

- Use different protocols to pull/push to repositories.
- If on the same computer:
 - `git://path/to/repo`
- If hosted on AFS
 - `ssh+git://path/to/repo`
- No ssh keys for AFS, sorry



Aside: Configure git

- `git config --global user.name "Harshad Shirwadkar"`
- `git config --global user.email "harshad@cmu.edu"`



Clone

Pull a copy of the repo to develop on

```
git clone git://path/to/repo
```

```
git clone ssh+git://unix.andrew.cmu.  
edu/afs/andrew/course/15/441-  
641/ANDREWID/ANDREWID-15-441-project-  
1.git
```



status

- Which files changed?
- Which files aren't being watched?
- Which files are stashed for commit?

`git status`



Pull

- Get latest updates from remote copy

```
git pull
```

- If this fails, you probably need to commit any unsaved changes



Commit

- Merge your changes into the repository

```
git add foo.c ...  
git commit
```



Push

- Don't push broken code!!

`git push`

- If this fails, you probably need to pull first



Branch & Merge

- Work on something different, without disturbing master/trunk


`git branch branch_name`

`git checkout branch_name`

do stuff...

`git checkout master`

`git merge branch_name`

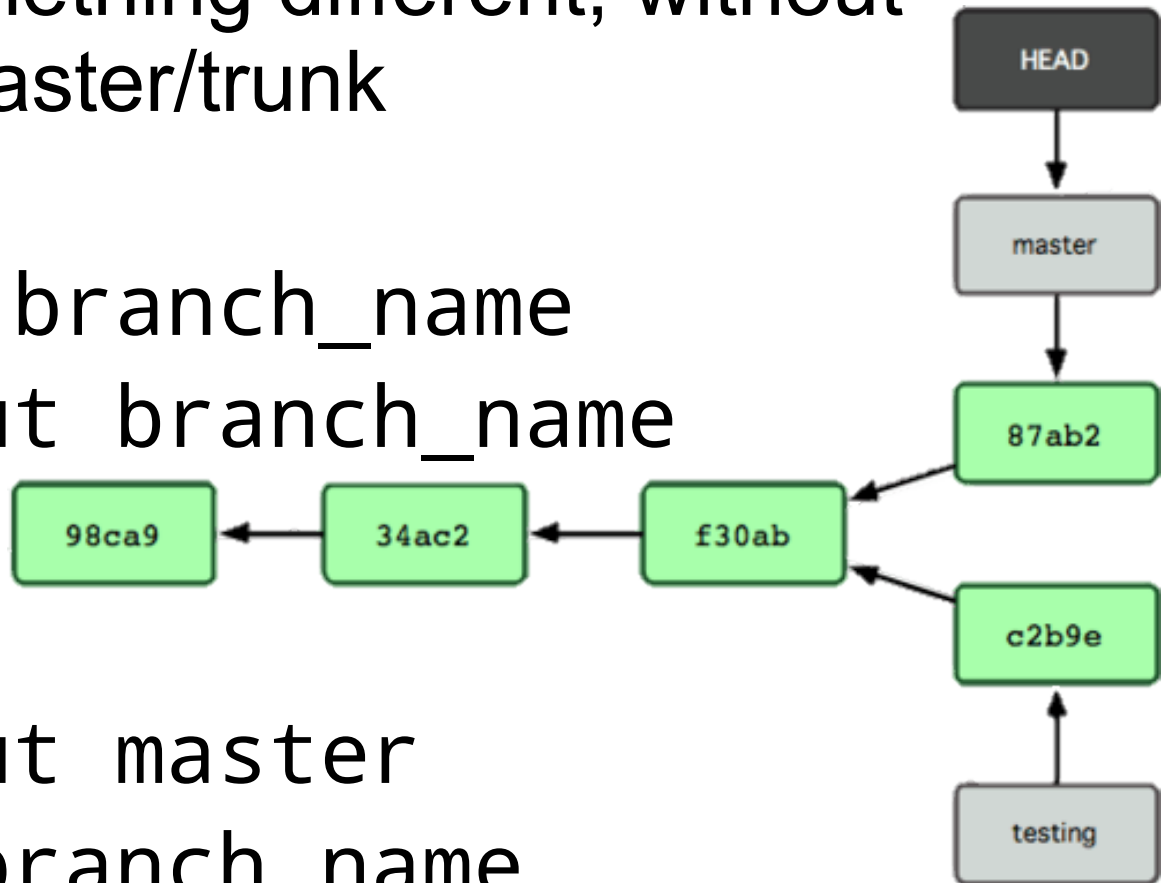

Tag

- Mark a revision as “final” or “ready”

```
git tag tag_name  
git push --tags
```



Remote Hosting

- github.com
- bitbucket.org
- svnhub.com
- AFS
- Google code
- Sourceforge



Aside: AFS Permissions

- To make a bare repo in AFS that someone else can pull/push from:
 1. Make a new directory in your home dir
 2. `fs sa . ANDREWID rlidwk`
 3. `git init --bare`



Good practices

- Small commits
- Useful messages
- Commit frequently
- Develop in branches
- Tag releasable versions



Small commits

- Only change one thing per commit
- When something breaks, easier to trace



Helpful commit messages

- Say what you changed
- Keep the first line short
- Make commits easy to find
- www.commitlogsfromlastnight.com



Commit Frequently

- Make changes, commit them
- When something breaks, go to the commit that broke it
- Only push when ready for others to get the changes
 - Don't make your teammates hate you



Git questions?



Checkpoint 2

- Add basic HTTP server
 - Read RFC 2616
- Start by parsing and building HTTP headers
- Serve error messages
- Then HEAD requests
- Then GET
- Then POST



Wireshark

- Packet monitoring software
- Install it. Use it.
- You will want this to examine the HTTP headers you're sending/receiving



All questions?

