

## 15-104 Introduction to Computing for Creative Practice

*Fall 2021*

### 02 Basics of p5.js Programming (cont'd)


Instructor: Tom Cortina, [tcortina@cs.cmu.edu](mailto:tcortina@cs.cmu.edu), GHC 4117, 412-268-3514

1



## Review

```
function draw() {
  background(200);
  fill(0, 255, 0);           // green
  circle(100, 100, 40);
  fill(255, 165, 0);        // orange
  triangle(30, 50, 25, 125, 175, 150);
  stroke(0, 255, 255);     // cyan
  strokeWeight(3);
  fill(255, 0, 0);         // red
  rect(100, 100, 50, 50);
  noLoop();
}
```



2



## Mouse input (introduction)

`mouseX`  
`mouseY`

- The system variable `mouseX` always contains the current horizontal position of the mouse, relative to (0, 0) of the canvas.
- The system variable `mouseY` always contains the current vertical position of the mouse, relative to (0, 0) of the canvas.

```
function draw() {
  background(0);
  fill(0, 230, 130);
  ellipse(mouseX, mouseY, 140, 95);
}
```

3



## Random values (introduction)

`random(x, y)`

- Returns a random floating-point between `x` (inclusive) and `y` (exclusive).

```
function draw() {
  background(200);
  fill(250, 250, 0);
  ellipse(random(0, 300), random(0, 300), random(10, 140), random(9, 120));
  ellipse(random(0, 300), random(0, 300), random(10, 140), random(9, 120));
  ellipse(random(0, 300), random(0, 300), random(10, 140), random(9, 120));
  noLoop();
}
```

4



## Code Style: Comments

- Comments help explain parts of your code to the reader

```
fill (255, 255, 255); // this is a comment (to the end of the line)
// this is a comment too
/* this is also a comment between the slash-star and star-slash */
/* this is a comment
   over several lines */
```

- Comments help us understand our code months from now when we go back to it to update it or use part of it for another program.

5



## Code Style: Indentation

- Shows code that is “inside” other code.
- Example: the body of a function is inside its function declaration:

```
function draw() {
    background(200);
    ellipse(50, 50, 80, 80);
}
```

- Typically a left bracket { increases indentation and a right bracket } decreases it.
- Use 4 spaces. Never use tabs.
- See the website if you use Sublime to make sure tabs translate to 4 spaces.

6



## No!

- This will still work, but you will make us sad, or mad.

```
function draw() {
  background(200);
  fill(0, 255, 0);
  circle(100, 100, 40);
  fill(255, 165, 0);
  triangle(30, 50, 25, 125, 175, 150);
  fill(255, 0, 0);
  rect(100, 100, 50, 50);
}
```

7



## Console

- Look for the Javascript console in your browser.
- This will help you find errors in your code.

Example: `Ellipse(mouseX, mouseY, 140, 95);`

Console message:

```
Uncaught ReferenceError: Ellipse is not defined
    at draw (sketch.js:10)
```

...

The error indicates that it can't recognize `Ellipse` (should be `ellipse`) in the draw function in `sketch.js` at line number 10.

[Google Chrome](#)  
View  
> Developer  
>> Javascript Console

8

## Using Arithmetic

- In general, at any place you can write a number, you can write an arithmetic expression or a function call that evaluates to a number.

- Example:

```
ellipse(100, 100, 50, 75);
```

```
ellipse(mouseX / 2, mouseY / 2, 50, 75);
```


```
ellipse(100, 100, random(30, 70), random(40, 60));
```

9

## Example

```
function setup() {
  createCanvas(300, 300);
}

function draw() {
  background(200, 200, 150);
  fill(180, 180, 255);
  ellipse((width / 2), (height / 2), 60, 60);
  ellipse((width / 2) + 10, (height / 2) + 10, 60, 60);
  ellipse((width / 2) + 20, (height / 2) + 20, 60, 60);
}
```



*width* is a p5.js environment variable that represents the width of the canvas in pixels.  
*height* is a p5.js environment variable that represents the height of the canvas in pixels.  
 Why are these identifiers useful?

10

## Conditionals (the `if` statement)

- An `if` statement allows to test a logical condition to determine whether to run some code or not.
- Logical conditions are expressions that evaluate to true or false.
- Expressions with the relational operators lead to true or false:

<code>&lt;</code>	less than
<code>&gt;</code>	greater than
<code>&lt;=</code>	less than or equal to
<code>&gt;=</code>	greater than or equal to
<code>==</code>	equal to
<code>!=</code>	not equal to

11

## Example

```
function setup() {
  createCanvas(300, 300);
}

function draw() {
  background(230, 230, 0);
  if (mouseY < (width / 2)) {
    background(0, 0, 200);
  }
}
```

Note the parentheses around the logical condition:  
`if ( condition ) {`  
     `// body of if statement`  
`}`

Note the instruction(s) that are to be executed only if the condition is true are inside the brackets and indented.

12

## Conditionals (the if/else statement)

- An if-else statement allows to test a logical condition to determine whether to run some code or some other code.
- General forms for if and if-else:

```
if ( condition ) {
  instruction(s) if true
}
```

```
if ( condition ) {
  instruction(s) if true
} else {
  instruction(s) if false
}
```


13

## Example (McCarthy, Reas, Fry)

`mouseIsPressed` is a p5.js system variable that evaluates to true if the mouse is pressed down and false otherwise.

```
function setup() {
  createCanvas(600, 400);
  strokeWeight(30);
}
```

```
function draw() {
  background(240);
  stroke(102);
  line(140, 0, 170, height);
  if (mouseIsPressed) {
    stroke(0);
  } else {
    stroke(255);
  }
  line(0, 170, width, 150);
}
```

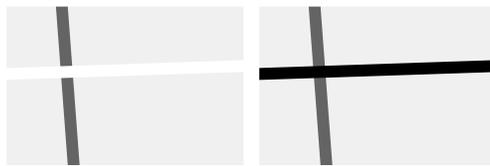


14



## Example (layered ifs)

```
function setup() {
  createCanvas(600, 400);
}
function draw() {
  if (mouseX < (width * 0.33)) {
    background(255, 0, 0);
  } else if (mouseX > (width * 0.66)) {
    background(0, 255, 0);
  } else {
    background(0, 0, 255);
  }
}
```

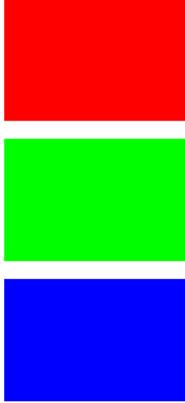

15



## Try these:

- Put a 20 X 20 square in each corner of a canvas (assuming the canvas is at least 40 X 40).
- Make a circle appear if the mouse is below the middle of your canvas.
  - Modify the code so the circle follows the mouse if the mouse is below the middle of the canvas, but nothing appears otherwise.
- Make the background of the canvas turn red if the mouse is in the top left quadrant, green if the mouse is in the bottom left quadrant, blue if the mouse is in the top right quadrant, and black if the mouse is in the bottom right quadrant. (HINT: You can do this by layering if-else instructions.)

16