

Support Vector Machines

Note to other teachers and users of these slides. Andrew would be delighted if you found this source material useful in giving your own lectures. Feel free to use these slides verbatim, or to modify them to fit your own needs. PowerPoint originals are available. If you make use of a significant portion of these slides in your own lecture, please include this message, or the following link to the source repository of Andrew's tutorials: <http://www.cs.cmu.edu/~awm/tutorials>. Comments and corrections gratefully received.

Andrew W. Moore
Professor
School of Computer Science
Carnegie Mellon University

www.cs.cmu.edu/~awm


awm@cs.cmu.edu

412-268-7599

Copyright © 2001, 2003, Andrew W. Moore


Nov 23rd, 2001

Linear Classifiers

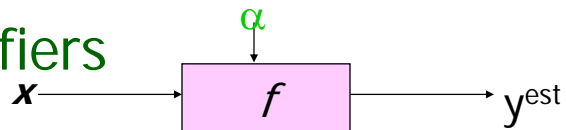

$$f(x, w, b) = \text{sign}(w \cdot x - b)$$

- denotes +1
- denotes -1

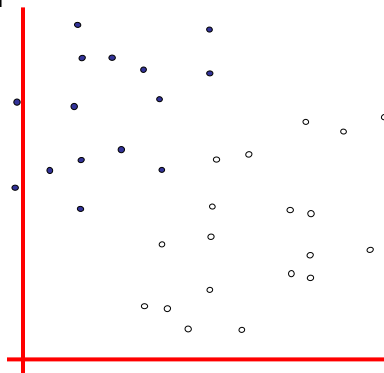


How would you classify this data?


Copyright © 2001, 2003, Andrew W. Moore

Support Vector Machines: Slide 2

Linear Classifiers

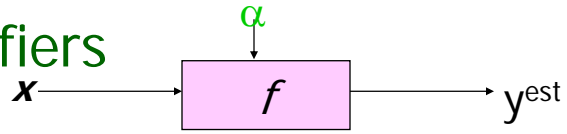

- denotes +1
- denotes -1

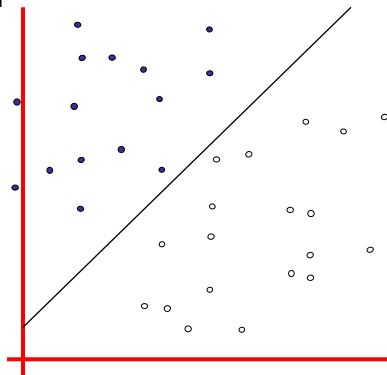


$$f(x, w, b) = \text{sign}(w \cdot x - b)$$

How would you classify this data?


Copyright © 2001, 2003, Andrew W. Moore

Support Vector Machines: Slide 3

Linear Classifiers

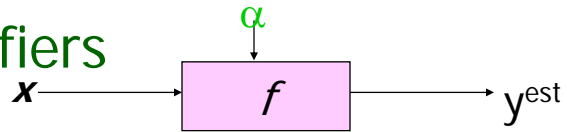

- denotes +1
- denotes -1

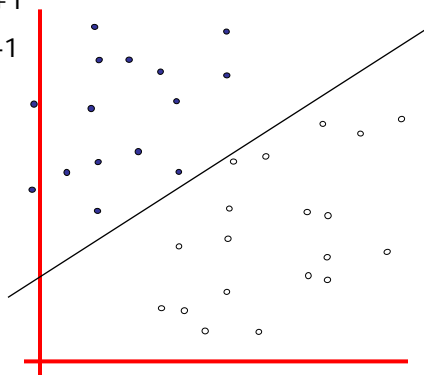


$$f(x, w, b) = \text{sign}(w \cdot x - b)$$

How would you classify this data?

Copyright © 2001, 2003, Andrew W. Moore


Support Vector Machines: Slide 4

Linear Classifiers

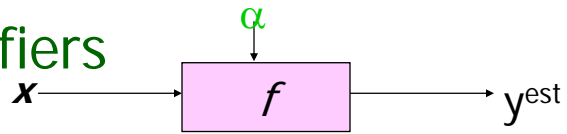

$$f(\mathbf{x}, \mathbf{w}, b) = \text{sign}(\mathbf{w} \cdot \mathbf{x} - b)$$

- denotes +1
- denotes -1

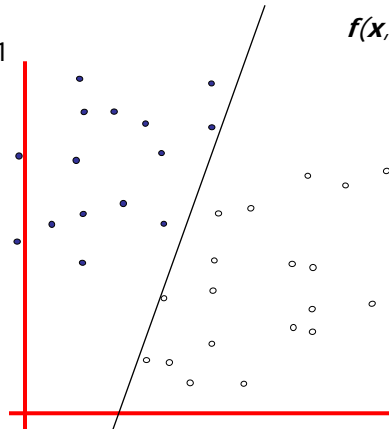


How would you classify this data?

Copyright © 2001, 2003, Andrew W. Moore


Support Vector Machines: Slide 5

Linear Classifiers

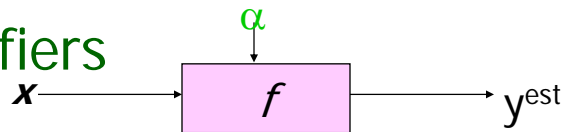

$$f(\mathbf{x}, \mathbf{w}, b) = \text{sign}(\mathbf{w} \cdot \mathbf{x} - b)$$

- denotes +1
- denotes -1

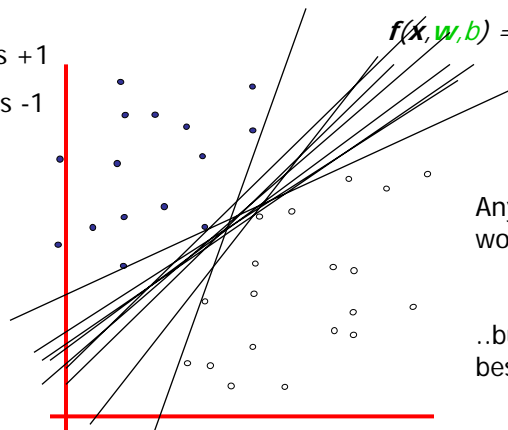


Any of these would be fine..

..but which is best?


Copyright © 2001, 2003, Andrew W. Moore

Support Vector Machines: Slide 6

Classifier Margin

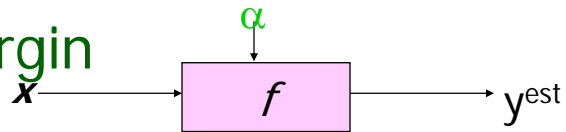


- denotes +1
- denotes -1

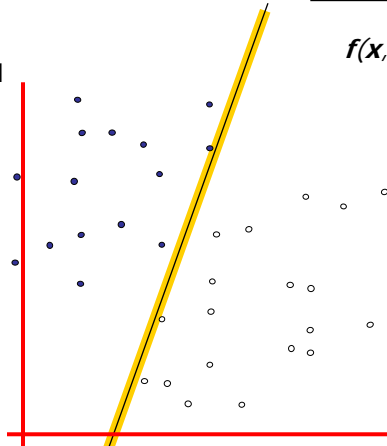


$$f(x, w, b) = \text{sign}(w \cdot x - b)$$

Define the **margin** of a linear classifier as the width that the boundary could be increased by before hitting a datapoint.

Maximum Margin

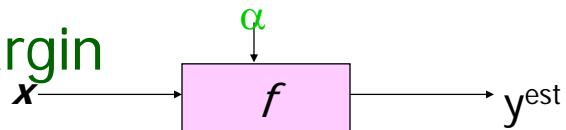

- denotes +1
- denotes -1

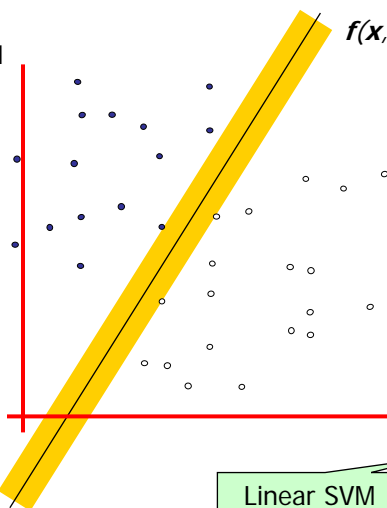


$$f(x, w, b) = \text{sign}(w \cdot x - b)$$

The **maximum margin linear classifier** is the linear classifier with the, um, maximum margin.

This is the simplest kind of SVM (Called an LSVM)


Linear SVM

Maximum Margin

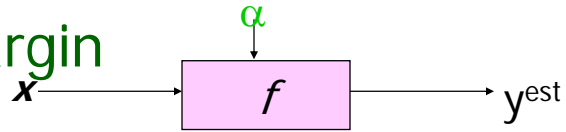

- denotes +1
- denotes -1

Support Vectors are those datapoints that the margin pushes up against

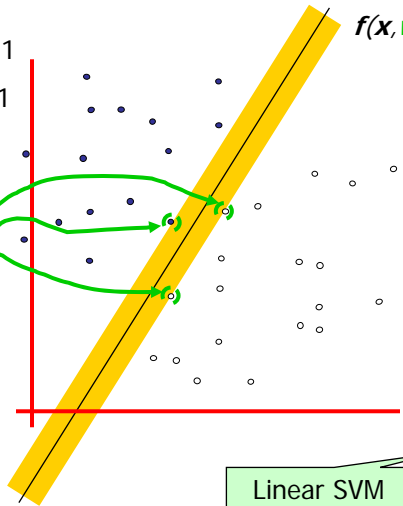

$$f(x, w, b) = \text{sign}(w \cdot x - b)$$

The **maximum margin linear classifier** is the linear classifier with the, um, maximum margin.

This is the simplest kind of SVM (Called an LSVM)

Linear SVM


Copyright © 2001, 2003, Andrew W. Moore

Support Vector Machines: Slide 9

Why Maximum Margin?

- denotes +1
- denotes -1

Support Vectors are those datapoints that the margin pushes up against

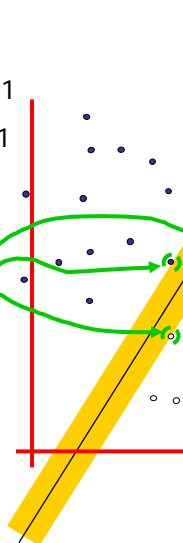


1. Intuitively this feels safest.
2. If we've made a small error in the location of the boundary (it's been jolted in its perpendicular direction) this gives us least chance of causing a misclassification.
3. LOOCV is easy since the model is immune to removal of any non-support-vector datapoints.
4. There's some theory (using VC dimension) that is related to (but not the same as) the proposition that this is a good thing.
5. Empirically it works very very well.

Copyright © 2001, 2003, Andrew W. Moore

Support Vector Machines: Slide 10


Specifying a line and margin

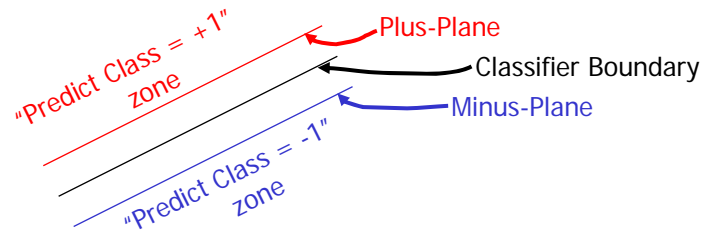

- How do we represent this mathematically?
- ...in m input dimensions?

Copyright © 2001, 2003, Andrew W. Moore

Support Vector Machines: Slide 11

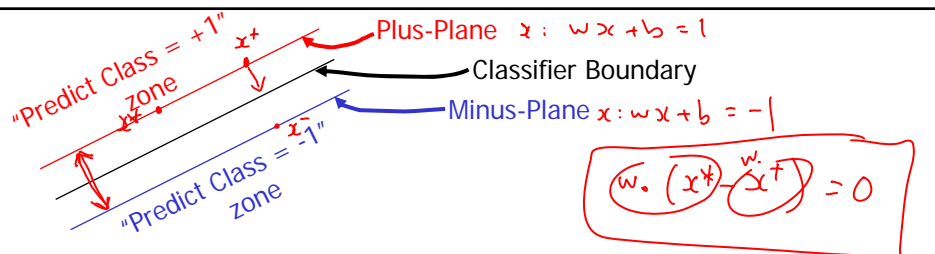

$$wx^+ + b = 1$$

$$\tilde{x}^- = \tilde{x}^+ + \lambda \tilde{w}$$

$$\tilde{w} \cdot \tilde{x}^- = \tilde{w} \cdot \tilde{x}^+ + \lambda w^2$$

$$-1 - b = 1 - b + \lambda w^2 \Rightarrow -2 = \lambda w^2$$

$$\Rightarrow \lambda = \frac{-2}{w^2}$$


$$M. Width = |x^+ - x^-|$$

$$= \left| x^+ - \left(x^+ + \frac{-2}{w^2} w \right) \right| = \left| \frac{-2}{w^2} w \right| = \frac{2}{\sqrt{w^2}}$$

Copyright © 2001, 2003, Andrew W. Moore

Support Vector Machines: Slide 12

Specifying a line and margin

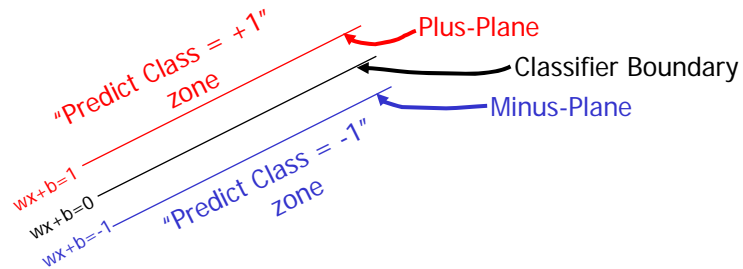


- Plus-plane = $\{ \mathbf{x} : \mathbf{w} \cdot \mathbf{x} + b = +1 \}$
- Minus-plane = $\{ \mathbf{x} : \mathbf{w} \cdot \mathbf{x} + b = -1 \}$

Classify as.. $+1$ if $\mathbf{w} \cdot \mathbf{x} + b \geq 1$
 -1 if $\mathbf{w} \cdot \mathbf{x} + b \leq -1$
 Universe explodes if $-1 < \mathbf{w} \cdot \mathbf{x} + b < 1$

Copyright © 2001, 2003, Andrew W. Moore

Support Vector Machines: Slide 13

Computing the margin width

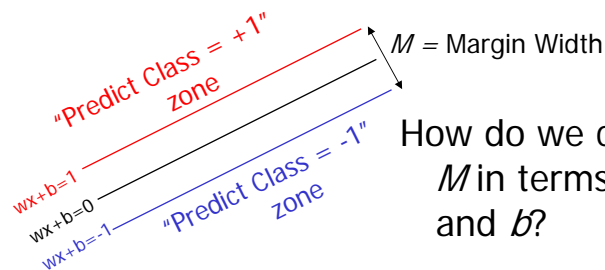

How do we compute M in terms of \mathbf{w} and b ?


- Plus-plane = $\{ \mathbf{x} : \mathbf{w} \cdot \mathbf{x} + b = +1 \}$
- Minus-plane = $\{ \mathbf{x} : \mathbf{w} \cdot \mathbf{x} + b = -1 \}$

Claim: The vector \mathbf{w} is perpendicular to the Plus Plane. **Why?**

Copyright © 2001, 2003, Andrew W. Moore

Support Vector Machines: Slide 14

Computing the margin width

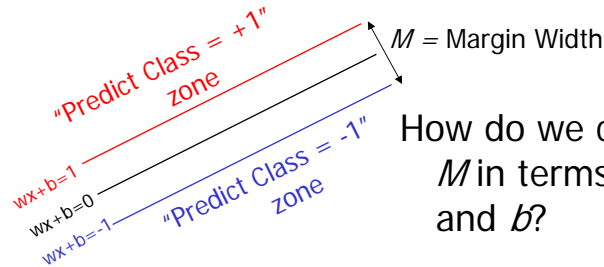

How do we compute M in terms of \mathbf{w} and b ?

- Plus-plane = $\{ \mathbf{x} : \mathbf{w} \cdot \mathbf{x} + b = +1 \}$
- Minus-plane = $\{ \mathbf{x} : \mathbf{w} \cdot \mathbf{x} + b = -1 \}$

Claim: The vector \mathbf{w} is perpendicular to the Plus Plane. **Why?**


Let \mathbf{u} and \mathbf{v} be two vectors on the Plus Plane. What is $\mathbf{w} \cdot (\mathbf{u} - \mathbf{v})$?

And so of course the vector \mathbf{w} is also perpendicular to the Minus Plane

Copyright © 2001, 2003, Andrew W. Moore

Support Vector Machines: Slide 15

Computing the margin width

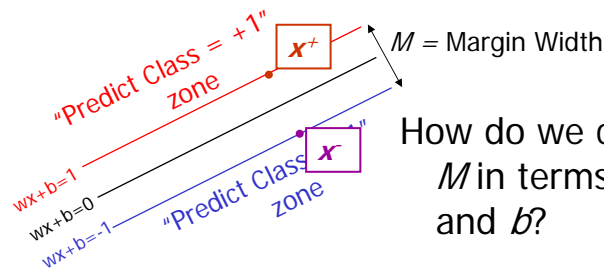

How do we compute M in terms of \mathbf{w} and b ?


- Plus-plane = $\{ \mathbf{x} : \mathbf{w} \cdot \mathbf{x} + b = +1 \}$
- Minus-plane = $\{ \mathbf{x} : \mathbf{w} \cdot \mathbf{x} + b = -1 \}$
- The vector \mathbf{w} is perpendicular to the Plus Plane
- Let \mathbf{x}^- be any point on the minus plane
- Let \mathbf{x}^+ be the closest plus-plane-point to \mathbf{x}^- .

Any location in \mathbb{R}^m : not necessarily a datapoint

Copyright © 2001, 2003, Andrew W. Moore

Support Vector Machines: Slide 16

Computing the margin width

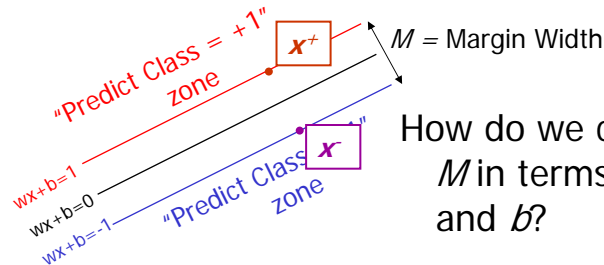


How do we compute M in terms of \mathbf{w} and b ?

- Plus-plane = $\{ \mathbf{x} : \mathbf{w} \cdot \mathbf{x} + b = +1 \}$
- Minus-plane = $\{ \mathbf{x} : \mathbf{w} \cdot \mathbf{x} + b = -1 \}$
- The vector \mathbf{w} is perpendicular to the Plus Plane
- Let \mathbf{x}^- be any point on the minus plane
- Let \mathbf{x}^+ be the closest plus-plane-point to \mathbf{x}^- .
- **Claim:** $\mathbf{x}^+ = \mathbf{x}^- + \lambda \mathbf{w}$ for some value of λ . **Why?**

Copyright © 2001, 2003, Andrew W. Moore

Support Vector Machines: Slide 17

Computing the margin width

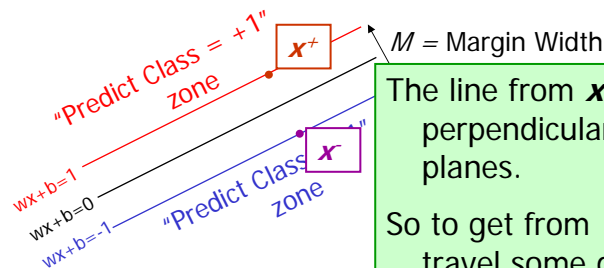

The line from \mathbf{x}^- to \mathbf{x}^+ is perpendicular to the planes.


So to get from \mathbf{x}^- to \mathbf{x}^+ travel some distance in direction \mathbf{w} .

- Plus-plane = $\{ \mathbf{x} : \mathbf{w} \cdot \mathbf{x} + b = +1 \}$
- Minus-plane = $\{ \mathbf{x} : \mathbf{w} \cdot \mathbf{x} + b = -1 \}$
- The vector \mathbf{w} is perpendicular to the Plus Plane
- Let \mathbf{x}^- be any point on the minus plane
- Let \mathbf{x}^+ be the closest plus-plane-point to \mathbf{x}^- .
- **Claim:** $\mathbf{x}^+ = \mathbf{x}^- + \lambda \mathbf{w}$ for some value of λ . **Why?**

Copyright © 2001, 2003, Andrew W. Moore

Support Vector Machines: Slide 18

Computing the margin width

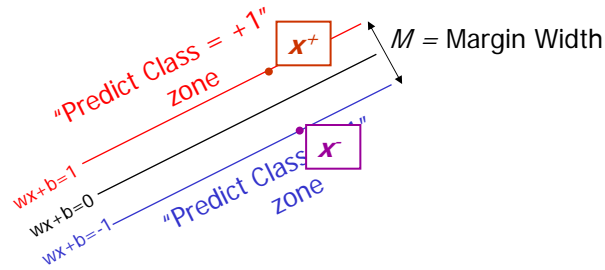

What we know:


- $w \cdot x^+ + b = +1$
- $w \cdot x^- + b = -1$
- $x^+ = x^- + \lambda w$
- $|x^+ - x^-| = M$

It's now easy to get M
in terms of w and b

Copyright © 2001, 2003, Andrew W. Moore

Support Vector Machines: Slide 19

Computing the margin width

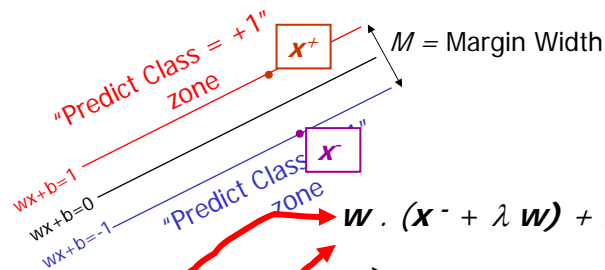

What we know:

- $w \cdot x^+ + b = +1$
- $w \cdot x^- + b = -1$
- $x^+ = x^- + \lambda w$
- $|x^+ - x^-| = M$

It's now easy to get M
in terms of w and b


$$\begin{aligned} & w \cdot (x^- + \lambda w) + b = 1 \\ \Rightarrow & w \cdot x^- + b + \lambda w \cdot w = 1 \\ \Rightarrow & -1 + \lambda w \cdot w = 1 \\ \Rightarrow & \end{aligned}$$

$$\lambda = \frac{2}{w \cdot w}$$

Copyright © 2001, 2003, Andrew W. Moore

Support Vector Machines: Slide 20

Computing the margin width

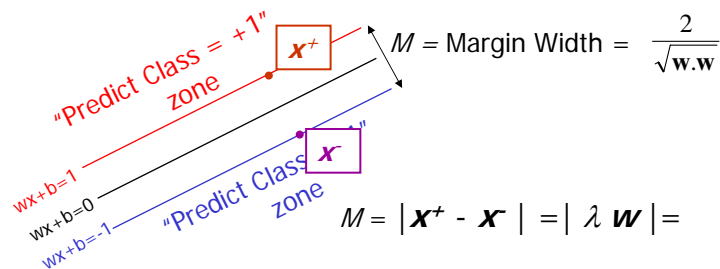

$$M = |\mathbf{x}^+ - \mathbf{x}^-| = |\lambda \mathbf{w}| =$$

$$= \lambda |\mathbf{w}| = \lambda \sqrt{\mathbf{w} \cdot \mathbf{w}}$$

$$= \frac{2\sqrt{\mathbf{w} \cdot \mathbf{w}}}{\mathbf{w} \cdot \mathbf{w}} = \frac{2}{\sqrt{\mathbf{w} \cdot \mathbf{w}}}$$


What we know:

- $\mathbf{w} \cdot \mathbf{x}^+ + b = +1$
- $\mathbf{w} \cdot \mathbf{x}^- + b = -1$
- $\mathbf{x}^+ = \mathbf{x}^- + \lambda \mathbf{w}$
- $|\mathbf{x}^+ - \mathbf{x}^-| = M$
- $\lambda = \frac{2}{\mathbf{w} \cdot \mathbf{w}}$

Copyright © 2001, 2003, Andrew W. Moore

Support Vector Machines: Slide 21

Learning the Maximum Margin Classifier

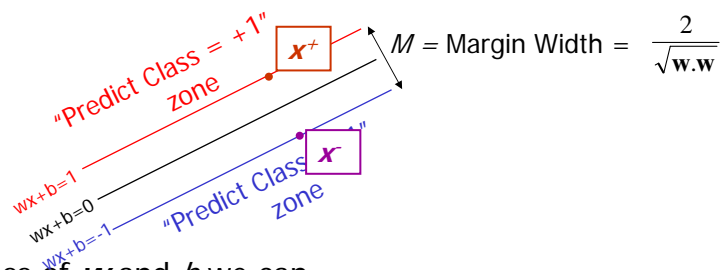

Given a guess of \mathbf{w} and b we can

- Compute whether all data points in the correct half-planes
- Compute the width of the margin

So now we just need to write a program to search the space of \mathbf{w} 's and b 's to find the widest margin that matches all the datapoints. *How?*

Gradient descent? Simulated Annealing? Matrix Inversion?

~~Newton's Method?~~ Newton's Method?

Copyright © 2001, 2003, Andrew W. Moore

Support Vector Machines: Slide 22

Learning via Quadratic Programming

- QP is a well-studied class of optimization algorithms to maximize a quadratic function of some real-valued variables subject to linear constraints.

Copyright © 2001, 2003, Andrew W. Moore

Support Vector Machines: Slide 23

Quadratic Programming

Find $\arg \max_{\mathbf{u}} c + \mathbf{d}^T \mathbf{u} + \frac{\mathbf{u}^T \mathbf{R} \mathbf{u}}{2}$

Handwritten notes: "u" under the variable; "Quadratic criterion" with an arrow pointing to the quadratic term; "Pos Def" written above the title.

Subject to

$$a_{11}u_1 + a_{12}u_2 + \dots + a_{1m}u_m \leq b_1$$

$$a_{21}u_1 + a_{22}u_2 + \dots + a_{2m}u_m \leq b_2$$

⋮

$$a_{n1}u_1 + a_{n2}u_2 + \dots + a_{nm}u_m \leq b_n$$

Handwritten notes: "additional linear inequality constraints" with a bracket pointing to the constraints.

And subject to

$$a_{(n+1)1}u_1 + a_{(n+1)2}u_2 + \dots + a_{(n+1)m}u_m = b_{(n+1)}$$

$$a_{(n+2)1}u_1 + a_{(n+2)2}u_2 + \dots + a_{(n+2)m}u_m = b_{(n+2)}$$

⋮

$$a_{(n+e)1}u_1 + a_{(n+e)2}u_2 + \dots + a_{(n+e)m}u_m = b_{(n+e)}$$

Handwritten notes: "e additional linear equality constraints" with a bracket pointing to the equality constraints.

Copyright © 2001, 2003, Andrew W. Moore

Support Vector Machines: Slide 24

Quadratic Programming

Find $\arg \max_{\mathbf{u}} c + \mathbf{d}^T \mathbf{u} + \frac{\mathbf{u}^T \mathbf{R} \mathbf{u}}{2}$ ← Quadratic criterion

Subject to

And subject to

There exist algorithms for finding such constrained quadratic optima much more efficiently and reliably than gradient ascent.

(But they are very fiddly...you probably don't want to write one yourself)

additional linear equality constraints


e additional linear equality constraints

$$a_{(n+e)1}u_1 + a_{(n+e)2}u_2 + \dots + a_{(n+e)m}u_m = b_{(n+e)}$$

Copyright © 2001, 2003, Andrew W. Moore

Support Vector Machines: Slide 25

Learning the Maximum Margin Classifier

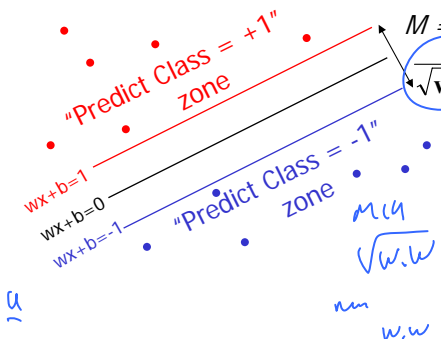

Given guess of \mathbf{w} , b we can
 Compute whether all data points are in the correct half-planes

- Compute the margin width

Assume R datapoints, each (\mathbf{x}_k, y_k) where $y_k = \pm 1$

What should our quadratic optimization criterion be?

function of $\tilde{\mathbf{w}}, b$
 quad form
 MIN $\mathbf{w} \cdot \mathbf{w}$

How many constraints will we have?


What should they be?

$$\begin{aligned} & \text{if } y_i = +1 && \mathbf{w} \cdot \mathbf{x}_i + b \geq +1 \\ & -1 && \mathbf{w} \cdot \mathbf{x}_i + b \leq -1 \end{aligned}$$

Copyright © 2001, 2003, Andrew W. Moore

Support Vector Machines: Slide 26

Learning the Maximum Margin Classifier

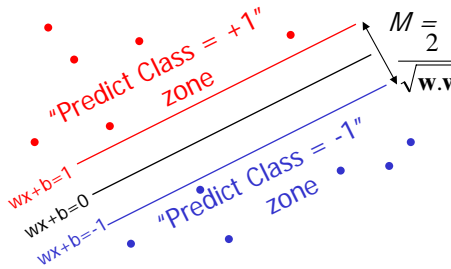

Given guess of w , b we can

- Compute whether all data points are in the correct half-planes
- Compute the margin width

Assume R datapoints, each (x_k, y_k) where $y_k = +/- 1$

What should our quadratic optimization criterion be?

Minimize $w \cdot w$

How many constraints will we have? R

What should they be?

$$w \cdot x_k + b \geq 1 \text{ if } y_k = 1$$


$$w \cdot x_k + b \leq -1 \text{ if } y_k = -1$$

Uh-oh!

This is going to be a problem!

What should we do?


- denotes +1
- denotes -1

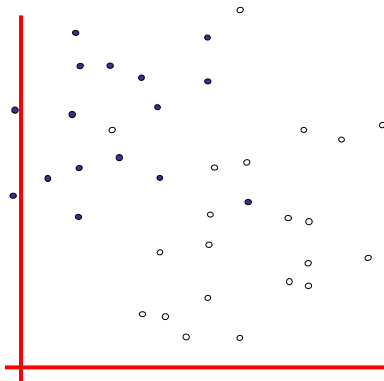

Uh-oh!

This is going to be a problem!
What should we do?

- denotes +1
- denotes -1

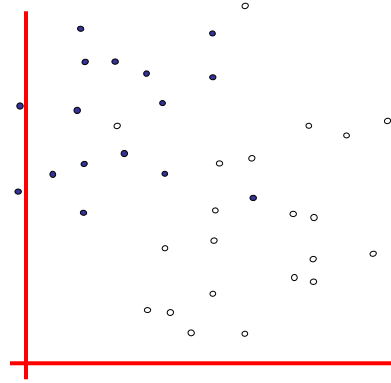

Idea 1:

Find minimum $w \cdot w$, while minimizing number of training set errors.

Problem: Two things to minimize makes for an ill-defined optimization


Copyright © 2001, 2003, Andrew W. Moore

Support Vector Machines: Slide 29

Uh-oh!

This is going to be a problem!
What should we do?

- denotes +1
- denotes -1

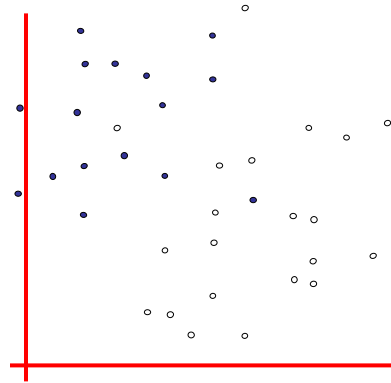

Idea 1.1:

Minimize

$w \cdot w + C (\#train\ errors)$

Tradeoff parameter

There's a serious practical problem that's about to make us reject this approach. Can you guess what it is?

Copyright © 2001, 2003, Andrew W. Moore

Support Vector Machines: Slide 30

Uh-oh!

This is going to be a problem!
What should we do?

- denotes +1
- denotes -1

Idea 1.1:

Minimize

$$W \cdot W + C \text{ (#train errors)}$$

Tradeoff parameter

Can't be expressed as a Quadratic Programming problem.

Solving it may be too slow.

(Also, doesn't distinguish between disastrous errors and near misses)

So... any other ideas?
you guess why?

Copyright © 2001, 2003, Andrew W. Moore

Support Vector Machines: Slide 31

Uh-oh!

This is going to be a problem!
What should we do?

- denotes +1
- denotes -1

Idea 2.0:


Minimize

$$W \cdot W + C \text{ (distance of error points to their correct place)}$$

Copyright © 2001, 2003, Andrew W. Moore

Support Vector Machines: Slide 32

Learning Maximum Margin with Noise

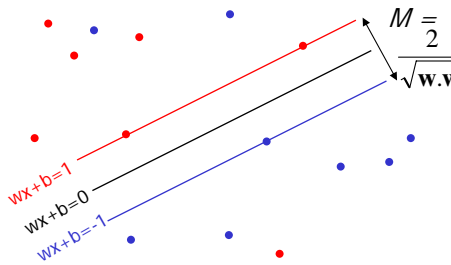

Given guess of \mathbf{w} , b we can

- Compute sum of distances of points to their correct zones
- Compute the margin width


Assume R datapoints, each (\mathbf{x}_k, y_k) where $y_k = +/- 1$

What should our quadratic optimization criterion be?

How many constraints will we have?

What should they be?

Learning Maximum Margin with Noise

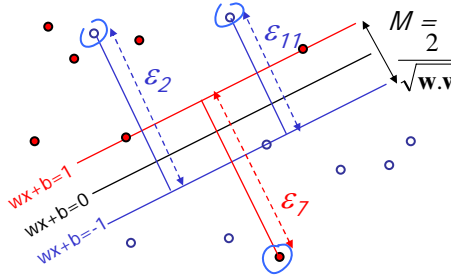

Given guess of \mathbf{w} , b we can

- Compute sum of distances of points to their correct zones
- Compute the margin width

Assume R datapoints, each (\mathbf{x}_k, y_k) where $y_k = +/- 1$

What should our quadratic optimization criterion be?

How many constraints will we have? R


What should they be?

Minimize
$$\frac{1}{2} \mathbf{w} \cdot \mathbf{w} + C \sum_{k=1}^R \epsilon_k$$

$$\mathbf{w} \cdot \mathbf{x}_k + b \geq 1 - \epsilon_k \text{ if } y_k = 1$$

$$\mathbf{w} \cdot \mathbf{x}_k + b \leq -1 + \epsilon_k \text{ if } y_k = -1$$

Learning Maximum Margin with Noise

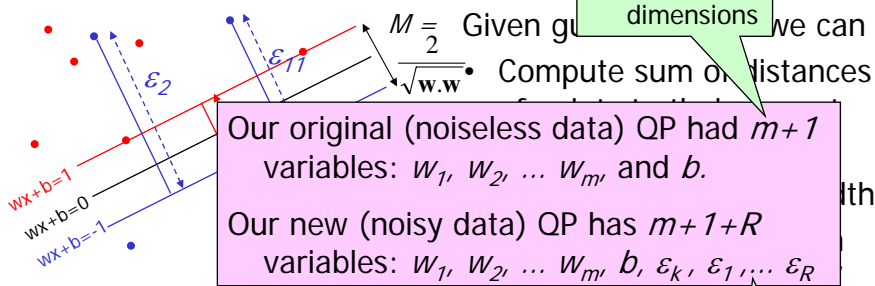

$m = \#$ input dimensions

Our original (noiseless data) QP had $m+1$ variables: w_1, w_2, \dots, w_m and b .
 Our new (noisy data) QP has $m+1+R$ variables: $w_1, w_2, \dots, w_m, b, \epsilon_1, \epsilon_2, \dots, \epsilon_R$


What should our quadratic optimization criterion be?

Minimize
$$\frac{1}{2} \mathbf{w} \cdot \mathbf{w} + C \sum_{k=1}^R \epsilon_k$$

How many constraints will we have? R

What should they be?
 $\mathbf{w} \cdot \mathbf{x}_k + b \geq 1 - \epsilon_k$ if $y_k = 1$
 $\mathbf{w} \cdot \mathbf{x}_k + b \leq -1 + \epsilon_k$ if $y_k = -1$

Learning Maximum Margin with Noise

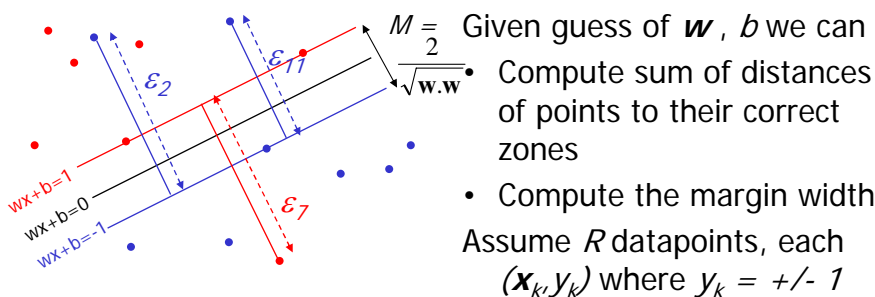

What should our quadratic optimization criterion be?


Minimize
$$\frac{1}{2} \mathbf{w} \cdot \mathbf{w} + C \sum_{k=1}^R \epsilon_k$$

How many constraints will we have? R

What should they be?
 $\mathbf{w} \cdot \mathbf{x}_k + b \geq 1 - \epsilon_k$ if $y_k = 1$
 $\mathbf{w} \cdot \mathbf{x}_k + b \leq -1 + \epsilon_k$ if $y_k = -1$

There's a bug in this QP. Can you spot it?

Learning Maximum Margin with Noise

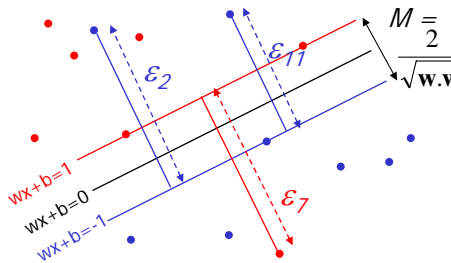

- Given guess of \mathbf{w} , b we can
- Compute sum of distances of points to their correct zones
 - Compute the margin width
- Assume R datapoints, each (\mathbf{x}_k, y_k) where $y_k = +/- 1$

What should our quadratic optimization criterion be?

Minimize
$$\frac{1}{2} \mathbf{w} \cdot \mathbf{w} + C \sum_{k=1}^R \epsilon_k$$

How many constraints will we have? $2R$

What should they be?

$\mathbf{w} \cdot \mathbf{x}_k + b \geq 1 - \epsilon_k$ if $y_k = 1$
 $\mathbf{w} \cdot \mathbf{x}_k + b \leq -1 + \epsilon_k$ if $y_k = -1$
 $\epsilon_k \geq 0$ for all k

Copyright © 2001, 2003, Andrew W. Moore

Support Vector Machines: Slide 37

An Equivalent QP

Warning: up until Rong Zhang spotted my error in Oct 2003, this equation had been wrong in earlier versions of the notes. This version is correct.

Maximize
$$\sum_{k=1}^R \alpha_k - \frac{1}{2} \sum_{k=1}^R \sum_{l=1}^R \alpha_k \alpha_l Q_{kl}$$
 where $Q_{kl} = y_k y_l (\mathbf{x}_k \cdot \mathbf{x}_l)$

Subject to these constraints:

$0 \leq \alpha_k \leq C \quad \forall k$

$\sum_{k=1}^R \alpha_k y_k = 0$

Then define:

$$\mathbf{w} = \sum_{k=1}^R \alpha_k y_k \mathbf{x}_k$$

$$b = y_K (1 - \epsilon_K) - \mathbf{x}_K \cdot \mathbf{w}_K$$

where $K = \arg \max_k \alpha_k$

Then classify with:

$$f(\mathbf{x}, \mathbf{w}, b) = \text{sign}(\mathbf{w} \cdot \mathbf{x} - b)$$

Copyright © 2001, 2003, Andrew W. Moore

Support Vector Machines: Slide 38

An Equivalent QP

Warning: up until Rong Zhang spotted my error in Oct 2003, this equation had been wrong in earlier versions of the notes. This version is correct.

$$\text{Maximize } \sum_{k=1}^R \alpha_k - \frac{1}{2} \sum_{k=1}^R \sum_{l=1}^R \alpha_k \alpha_l Q_{kl} \text{ where } Q_{kl} = y_k y_l (\mathbf{x}_k \cdot \mathbf{x}_l)$$

Subject to these constraints: $0 \leq \alpha_k \leq C \quad \forall k$ $\sum_{k=1}^R \alpha_k y_k = 0$

Then define:

$$\mathbf{w} = \sum_{k=1}^R \alpha_k y_k \mathbf{x}_k$$

Datapoints with $\alpha_k > 0$ will be the support vectors

$$f(\mathbf{x}; \mathbf{w}, b) = \text{sign}(\mathbf{w} \cdot \mathbf{x} - b)$$

$$b = y_K (1 - \epsilon_K) - \mathbf{x}_K \cdot \mathbf{w}$$

where $K = \arg \max_k \alpha_k$

..so this sum only needs to be over the support vectors.

Copyright © 2001, 2003, Andrew W. Moore

Support Vector Machines: Slide 39

An Equivalent QP

$$\text{Maximize } \sum_{k=1}^R \alpha_k - \frac{1}{2} \sum_{k=1}^R \sum_{l=1}^R \alpha_k \alpha_l y_k y_l (\mathbf{x}_k \cdot \mathbf{x}_l)$$

Subject to these constraints: $0 \leq \alpha_k \leq C \quad \forall k$ $\sum_{k=1}^R \alpha_k y_k = 0$

Then

$$\mathbf{w} = \sum_{k=1}^R \alpha_k y_k \mathbf{x}_k$$

$$b = y_K (1 - \epsilon_K) - \mathbf{x}_K \cdot \mathbf{w}$$

where $K = \arg \max_k \alpha_k$

Why did I tell you about this equivalent QP?


- It's a formulation that QP packages can optimize more quickly
- Because of further jaw-dropping developments you're about to learn.

Copyright © 2001, 2003, Andrew W. Moore

Support Vector Machines: Slide 40

Suppose we're in 1-dimension

What would
SVMs do with
this data?

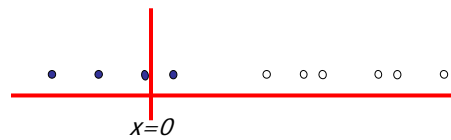


Copyright © 2001, 2003, Andrew W. Moore

Support Vector Machines: Slide 41

Suppose we're in 1-dimension

Not a big surprise

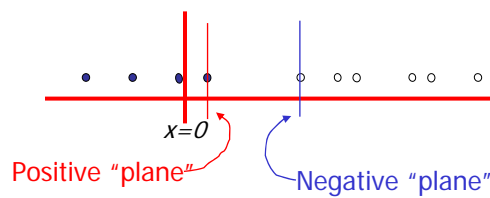


Copyright © 2001, 2003, Andrew W. Moore

Support Vector Machines: Slide 42

Harder 1-dimensional dataset

That's wiped the smirk off SVM's face.

What can be done about this?

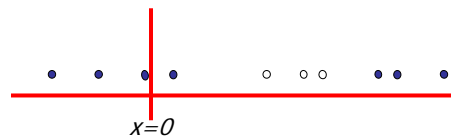


Copyright © 2001, 2003, Andrew W. Moore

Support Vector Machines: Slide 43

Harder 1-dimensional dataset

Remember how permitting non-linear basis functions made linear regression so much nicer?

Let's permit them here too

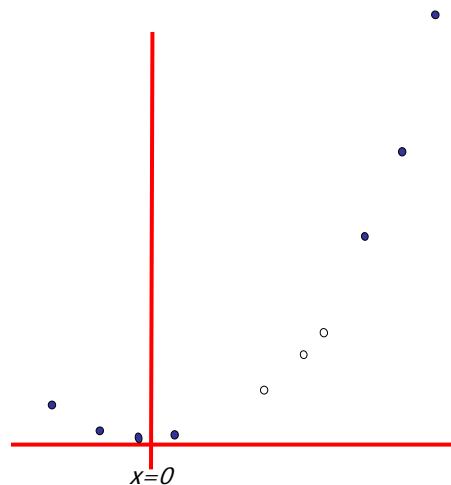


$$\mathbf{z}_k = (x_k, x_k^2)$$

Copyright © 2001, 2003, Andrew W. Moore

Support Vector Machines: Slide 44

Harder 1-dimensional dataset

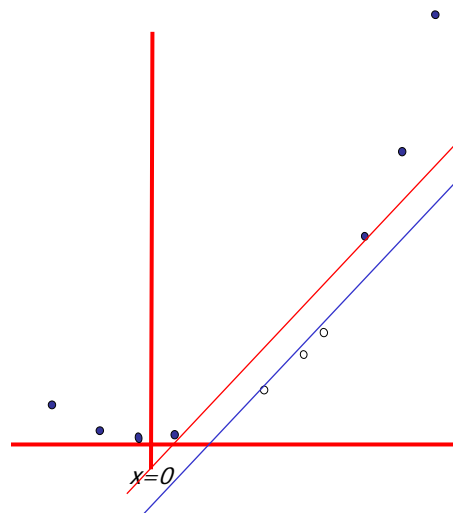

Remember how permitting non-linear basis functions made linear regression so much nicer?

Let's permit them here too

$$\mathbf{z}_k = (x_k, x_k^2)$$

Copyright © 2001, 2003, Andrew W. Moore

Support Vector Machines: Slide 45

Common SVM basis functions

$\mathbf{z}_k =$ (polynomial terms of \mathbf{x}_k of degree 1 to q)

$\mathbf{z}_k =$ (radial basis functions of \mathbf{x}_k)

$$\mathbf{z}_k[j] = \varphi_j(\mathbf{x}_k) = \text{KernelFn}\left(\frac{|\mathbf{x}_k - \mathbf{c}_j|}{KW}\right)$$

$\mathbf{z}_k =$ (sigmoid functions of \mathbf{x}_k)

This is sensible.

Is that the end of the story?

No...there's one more trick!

Copyright © 2001, 2003, Andrew W. Moore

Support Vector Machines: Slide 46

Quadratic Basis Functions

$$\Phi(\mathbf{x}) = \begin{pmatrix} 1 \\ \sqrt{2}x_1 \\ \sqrt{2}x_2 \\ \vdots \\ \sqrt{2}x_m \\ x_1^2 \\ x_2^2 \\ \vdots \\ x_m^2 \\ \sqrt{2}x_1x_2 \\ \sqrt{2}x_1x_3 \\ \vdots \\ \sqrt{2}x_1x_m \\ \sqrt{2}x_2x_3 \\ \vdots \\ \sqrt{2}x_1x_m \\ \vdots \\ \sqrt{2}x_{m-1}x_m \end{pmatrix}$$

Constant Term

Linear Terms

Pure Quadratic Terms

Quadratic Cross-Terms

Number of terms (assuming m input dimensions) = $(m+2)\text{-choose-2}$
 $= (m+2)(m+1)/2$
 $= (\text{as near as makes no difference}) m^2/2$

You may be wondering what those $\sqrt{2}$'s are doing.

- You should be happy that they do no harm
- You'll find out why they're there soon.

Copyright © 2001, 2003, Andrew W. Moore Support Vector Machines: Slide 47

QP with basis functions

Warning: up until Rong Zhang spotted my error in Oct 2003, this equation had been wrong in earlier versions of the notes. This version is correct.

Maximize $\sum_{k=1}^R \alpha_k - \frac{1}{2} \sum_{k=1}^R \sum_{l=1}^R \alpha_k \alpha_l Q_{kl}$ where $Q_{kl} = y_k y_l (\Phi(\mathbf{x}_k) \cdot \Phi(\mathbf{x}_l))$

Subject to these constraints: $0 \leq \alpha_k \leq C \quad \forall k$ $\sum_{k=1}^R \alpha_k y_k = 0$

Then define:

$$\mathbf{w} = \sum_{k \text{ s.t. } \alpha_k > 0} \alpha_k y_k \Phi(\mathbf{x}_k)$$

$$b = y_K (1 - \varepsilon_K) - \mathbf{x}_K \cdot \mathbf{w}_K$$

where $K = \arg \max_k \alpha_k$

Then classify with:

$$f(\mathbf{x}, \mathbf{w}, b) = \text{sign}(\mathbf{w} \cdot \phi(\mathbf{x}) - b)$$

Copyright © 2001, 2003, Andrew W. Moore Support Vector Machines: Slide 48

QP with basis functions

Maximize $\sum_{k=1}^R \alpha_k - \frac{1}{2} \sum_{k=1}^R \sum_{l=1}^R \alpha_k \alpha_l Q_{kl}$ where $Q_{kl} = y_k y_l (\Phi(\mathbf{x}_k) \cdot \Phi(\mathbf{x}_l))$

Subject to these constraints: $0 \leq \alpha_k \leq$

Then define:

$$\mathbf{w} = \sum_{k \text{ s.t. } \alpha_k > 0} \alpha_k y_k \Phi(\mathbf{x}_k)$$

$$b = y_K (1 - \epsilon_K) - \mathbf{x}_K \cdot \mathbf{w}_K$$

where $K = \arg \max_k \alpha_k$

We must do $R^2/2$ dot products to get this matrix ready.

Each dot product requires $m^2/2$ additions and multiplications

The whole thing costs $R^2 m^2 / 4$.
Yeeks!

...or does it?

$$f(\mathbf{x}, \mathbf{w}, b) = \text{sign}(\mathbf{w} \cdot \phi(\mathbf{x}) - b)$$

Quadratic Dot Products


$$\Phi(\mathbf{a}) \cdot \Phi(\mathbf{b}) =$$

$$\begin{pmatrix} 1 \\ \sqrt{2}a_1 \\ \sqrt{2}a_2 \\ \vdots \\ \sqrt{2}a_m \\ a_1^2 \\ a_2^2 \\ \vdots \\ a_m^2 \\ \sqrt{2}a_1a_2 \\ \sqrt{2}a_1a_3 \\ \vdots \\ \sqrt{2}a_1a_m \\ \sqrt{2}a_2a_3 \\ \vdots \\ \sqrt{2}a_1a_m \\ \vdots \\ \sqrt{2}a_{m-1}a_m \end{pmatrix} \cdot \begin{pmatrix} 1 \\ \sqrt{2}b_1 \\ \sqrt{2}b_2 \\ \vdots \\ \sqrt{2}b_m \\ b_1^2 \\ b_2^2 \\ \vdots \\ b_m^2 \\ \sqrt{2}b_1b_2 \\ \sqrt{2}b_1b_3 \\ \vdots \\ \sqrt{2}b_1b_m \\ \sqrt{2}b_2b_3 \\ \vdots \\ \sqrt{2}b_1b_m \\ \vdots \\ \sqrt{2}b_{m-1}b_m \end{pmatrix}$$

$$\begin{aligned} & 1 \\ & + \sum_{i=1}^m 2a_i b_i \\ & + \sum_{i=1}^m a_i^2 b_i^2 \\ & + \sum_{i=1}^m \sum_{j=i+1}^m 2a_i a_j b_i b_j \end{aligned}$$

Quadratic Dot Products

$$\Phi(\mathbf{a}) \bullet \Phi(\mathbf{b}) = 1 + 2 \sum_{i=1}^m a_i b_i + \sum_{i=1}^m a_i^2 b_i^2 + \sum_{i=1}^m \sum_{j=i+1}^m 2 a_i a_j b_i b_j$$

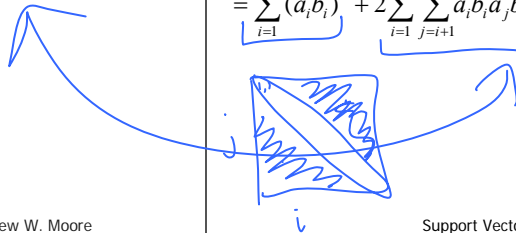

Copyright © 2001, 2003, Andrew W. Moore


Just out of casual, innocent, interest, let's look at another function of \mathbf{a} and \mathbf{b} :

$$\begin{aligned} & (\mathbf{a} \cdot \mathbf{b} + 1)^2 \\ &= (\mathbf{a} \cdot \mathbf{b})^2 + 2\mathbf{a} \cdot \mathbf{b} + 1 \\ &= \left(\sum_{i=1}^m a_i b_i \right)^2 + 2 \sum_{i=1}^m a_i b_i + 1 \\ &= \sum_{i=1}^m \sum_{j=1}^m a_i b_i a_j b_j + 2 \sum_{i=1}^m a_i b_i + 1 \\ &= \sum_{i=1}^m (a_i b_i)^2 + 2 \sum_{i=1}^m \sum_{j=i+1}^m a_i b_i a_j b_j + 2 \sum_{i=1}^m a_i b_i + 1 \end{aligned}$$

Support Vector Machines: Slide 51

Quadratic Dot Products

$$\Phi(\mathbf{a}) \bullet \Phi(\mathbf{b}) = 1 + 2 \sum_{i=1}^m a_i b_i + \sum_{i=1}^m a_i^2 b_i^2 + \sum_{i=1}^m \sum_{j=i+1}^m 2 a_i a_j b_i b_j$$

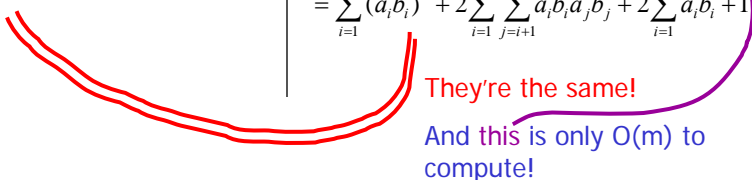

Just out of casual, innocent, interest, let's look at another function of \mathbf{a} and \mathbf{b} :

$$\begin{aligned} & (\mathbf{a} \cdot \mathbf{b} + 1)^2 \\ &= (\mathbf{a} \cdot \mathbf{b})^2 + 2\mathbf{a} \cdot \mathbf{b} + 1 \\ &= \left(\sum_{i=1}^m a_i b_i \right)^2 + 2 \sum_{i=1}^m a_i b_i + 1 \\ &= \sum_{i=1}^m \sum_{j=1}^m a_i b_i a_j b_j + 2 \sum_{i=1}^m a_i b_i + 1 \\ &= \sum_{i=1}^m (a_i b_i)^2 + 2 \sum_{i=1}^m \sum_{j=i+1}^m a_i b_i a_j b_j + 2 \sum_{i=1}^m a_i b_i + 1 \end{aligned}$$

They're the same!
And this is only $O(m)$ to compute!

Copyright © 2001, 2003, Andrew W. Moore

Support Vector Machines: Slide 52

QP with Quadratic basis

Warning: up until Rong Zhang spotted my error in Oct 2003, this equation had been wrong in earlier versions of the notes. This version is correct.

$$\text{Maximize } \sum_{k=1}^R \alpha_k - \frac{1}{2} \sum_{k=1}^R \sum_{l=1}^R \alpha_k \alpha_l Q_{kl} \text{ where } Q_{kl} = y_k y_l (\Phi(\mathbf{x}_k) \cdot \Phi(\mathbf{x}_l))$$

Subject to these constraints: $0 \leq \alpha_k \leq$

We must do $R^2/2$ dot products to get this matrix ready.
Each dot product now only requires m additions and multiplications

Then define:

$$\mathbf{w} = \sum_{k \text{ s.t. } \alpha_k > 0} \alpha_k y_k \Phi(\mathbf{x}_k)$$

$$b = y_K (1 - \varepsilon_K) - \mathbf{x}_K \cdot \mathbf{w}_K$$

where $K = \arg \max_k \alpha_k$

Then classify with:

$$f(\mathbf{x}, \mathbf{w}, b) = \text{sign}(\mathbf{w} \cdot \phi(\mathbf{x}) - b)$$

Copyright © 2001, 2003, Andrew W. Moore

Support Vector Machines: Slide 53

Higher Order Polynomials

Poly-nomial	$\phi(\mathbf{x})$	Cost to build Q_{kl} matrix traditionally	Cost if 100 inputs	$\phi(\mathbf{a}) \cdot \phi(\mathbf{b})$	Cost to build Q_{kl} matrix sneakily	Cost if 100 inputs
Quadratic	All $m^2/2$ terms up to degree 2	$m^2 R^2 / 4$	2,500 R^2	$(\mathbf{a} \cdot \mathbf{b} + 1)^2$	$m R^2 / 2$	50 R^2
Cubic	All $m^3/6$ terms up to degree 3	$m^3 R^2 / 12$	83,000 R^2	$(\mathbf{a} \cdot \mathbf{b} + 1)^3$	$m R^2 / 2$	50 R^2
Quartic	All $m^4/24$ terms up to degree 4	$m^4 R^2 / 48$	1,960,000 R^2	$(\mathbf{a} \cdot \mathbf{b} + 1)^4$	$m R^2 / 2$	50 R^2

Copyright © 2001, 2003, Andrew W. Moore

Support Vector Machines: Slide 54

QP with Quintic basis functions

We must do $R^2/2$ dot products to get this matrix ready.

In 100-d, each dot product now needs 103 operations instead of 75 million

But there are still worrying things lurking away.
What are they?

constraints.

$$Q_{kl} = y_k y_l (\Phi(\mathbf{x}_k) \cdot \Phi(\mathbf{x}_l))$$

$$\forall k \quad \sum_{k=1}^R \alpha_k y_k = 0$$

Then define:

$$\mathbf{w} = \sum_{k \text{ s.t. } \alpha_k > 0} \alpha_k y_k \Phi(\mathbf{x}_k)$$

$$b = y_K (1 - \varepsilon_K) - \mathbf{x}_K \cdot \mathbf{w}_K$$

where $K = \arg \max_k \alpha_k$

$w \cdot \Phi(x)$

$\Phi(x)$

Then classify with:

$$f(\mathbf{x}, \mathbf{w}, b) = \text{sign}(\mathbf{w} \cdot \Phi(\mathbf{x}) - b)$$

Copyright © 2001, 2003, Andrew W. Moore

Support Vector Machines: Slide 55

QP with Quintic basis functions

We must do $R^2/2$ dot products to get this matrix ready.

In 100-d, each dot product now needs 103 operations instead of 75 million

But there are still worrying things lurking away.
What are they?

constraints.

$$Q_{kl} = y_k y_l (\Phi(\mathbf{x}_k) \cdot \Phi(\mathbf{x}_l))$$

$$\forall k \quad \sum_{k=1}^R \alpha_k y_k = 0$$

Then define:

$$\mathbf{w} = \sum_{k \text{ s.t. } \alpha_k > 0} \alpha_k y_k \Phi(\mathbf{x}_k)$$

$$b = y_K (1 - \varepsilon_K) - \mathbf{x}_K \cdot \mathbf{w}_K$$

where $K = \arg \max_k \alpha_k$

- The fear of overfitting with this enormous number of terms
- The evaluation phase (doing a set of predictions on a test set) will be very expensive (*why?*)

Then classify with:

$$f(\mathbf{x}, \mathbf{w}, b) = \text{sign}(\mathbf{w} \cdot \Phi(\mathbf{x}) - b)$$

Copyright © 2001, 2003, Andrew W. Moore

Support Vector Machines: Slide 56

QP with Quintic basis functions

We must do $R^2/2$ dot products to get this matrix ready.

In 100-d, each dot product now needs 103 operations instead of 75 million

But there are still worrying things lurking away. What are they?

constraints.

Then define:

$$\mathbf{w} = \sum_{k \text{ s.t. } \alpha_k > 0} \alpha_k y_k \Phi(\mathbf{x}_k)$$

$$b = y_K (1 - \varepsilon_K) - \mathbf{x}_K \cdot \mathbf{w}_K$$

where $K = \arg \max_k \alpha_k$

$$Q_{ij} = y_i y_j (\Phi(\mathbf{x}_i) \cdot \Phi(\mathbf{x}_j))$$

The use of Maximum Margin **magically** makes this not a problem

$$\forall k \quad \sum \alpha_k y_k = 0$$

- The fear of overfitting with this enormous number of terms

- The evaluation phase (doing a set of predictions on a test set) will be very expensive (why?)

Because each $\mathbf{w} \cdot \phi(\mathbf{x})$ (see below) needs 75 million operations. *What can be done?*

Then classify with:

$$f(\mathbf{x}, \mathbf{w}, b) = \text{sign}(\mathbf{w} \cdot \phi(\mathbf{x}) - b)$$

Copyright © 2001, 2003, Andrew W. Moore

Support Vector Machines: Slide 57

QP with Quintic basis functions

We must do $R^2/2$ dot products to get this matrix ready.

In 100-d, each dot product now needs 103 operations instead of 75 million

But there are still worrying things lurking away. What are they?

constraints.

Then define:

$$\mathbf{w} = \sum_{k \text{ s.t. } \alpha_k > 0} \alpha_k y_k \Phi(\mathbf{x}_k)$$

$$\begin{aligned} \mathbf{w} \cdot \Phi(\mathbf{x}) &= \sum_{k \text{ s.t. } \alpha_k > 0} \alpha_k y_k \Phi(\mathbf{x}_k) \cdot \Phi(\mathbf{x}) \\ &= \sum_{k \text{ s.t. } \alpha_k > 0} \alpha_k y_k (\mathbf{x}_k \cdot \mathbf{x} + 1)^5 \end{aligned}$$

Only S m operations (S =#support vectors)

$$Q_{ij} = y_i y_j (\Phi(\mathbf{x}_i) \cdot \Phi(\mathbf{x}_j))$$

The use of Maximum Margin **magically** makes this not a problem

$$\forall k \quad \sum \alpha_k y_k = 0$$

- The fear of overfitting with this enormous number of terms

- The evaluation phase (doing a set of predictions on a test set) will be very expensive (why?)

Because each $\mathbf{w} \cdot \phi(\mathbf{x})$ (see below) needs 75 million operations. *What can be done?*

Then classify with:

$$f(\mathbf{x}, \mathbf{w}, b) = \text{sign}(\mathbf{w} \cdot \phi(\mathbf{x}) - b)$$

Copyright © 2001, 2003, Andrew W. Moore

Support Vector Machines: Slide 58

QP with Quintic basis functions

We must do $R^2/2$ dot products to get this matrix ready.

In 100-d, each dot product now needs 103 operations instead of 75 million

But there are still worrying things lurking away. What are they?

constraints.

Then define:

$$\mathbf{w} = \sum_{k \text{ s.t. } \alpha_k > 0} \alpha_k y_k \Phi(\mathbf{x}_k)$$

$$\begin{aligned} \mathbf{w} \cdot \Phi(\mathbf{x}) &= \sum_{k \text{ s.t. } \alpha_k > 0} \alpha_k y_k \Phi(\mathbf{x}_k) \cdot \Phi(\mathbf{x}) \\ &= \sum_{k \text{ s.t. } \alpha_k > 0} \alpha_k y_k (\mathbf{x}_k \cdot \mathbf{x} + 1)^5 \end{aligned}$$

Only Sm operations ($S=\#\text{support vectors}$)

Copyright © 2001, 2003, Andrew W. Moore

$$Q_{kl} = y_l y_k (\Phi(\mathbf{x}_k) \cdot \Phi(\mathbf{x}_l))$$

The use of Maximum Margin **magically** makes this not a problem

$$\forall k \quad \sum_l \alpha_k y_k = 0$$

•The fear of overfitting with this enormous number of terms

•The evaluation phase (doing a set of predictions on a test set) will be very expensive (why?)

Because each $\mathbf{w} \cdot \phi(\mathbf{x})$ (see below) needs 75 million operations. What can be done?

When you see this many callout bubbles on a slide it's time to wrap the author in a blanket, gently take him away and murmur "someone's been at the PowerPoint for too long."

Support Vector Machines: Slide 57

QP with Quintic basis functions

$$\text{Maximize } \sum_{k=1}^R \alpha_k - \frac{1}{2} \sum_{k=1}^R \sum_{l=1}^R \alpha_k \alpha_l Q_{kl} \text{ where}$$

Subject to these constraints: $0 \leq \alpha_k \leq C$

Then define:

$$\mathbf{w} = \sum_{k \text{ s.t. } \alpha_k > 0} \alpha_k y_k \Phi(\mathbf{x}_k)$$

$$\begin{aligned} \mathbf{w} \cdot \Phi(\mathbf{x}) &= \sum_{k \text{ s.t. } \alpha_k > 0} \alpha_k y_k \Phi(\mathbf{x}_k) \cdot \Phi(\mathbf{x}) \\ &= \sum_{k \text{ s.t. } \alpha_k > 0} \alpha_k y_k (\mathbf{x}_k \cdot \mathbf{x} + 1)^5 \end{aligned}$$

Only Sm operations ($S=\#\text{support vectors}$)

Copyright © 2001, 2003, Andrew W. Moore

Andrew's opinion of why SVMs don't overfit as much as you'd think:

No matter what the basis function, there are really only up to R parameters: $\alpha_1, \alpha_2 \dots \alpha_R$, and usually most are set to zero by the Maximum Margin.

Asking for small $\mathbf{w} \cdot \mathbf{w}$ is like "weight decay" in Neural Nets and like Ridge Regression parameters in Linear regression and like the use of Priors in Bayesian Regression---all designed to smooth the function and reduce overfitting.

Then classify with:

$$f(\mathbf{x}, \mathbf{w}, b) = \text{sign}(\mathbf{w} \cdot \phi(\mathbf{x}) - b)$$

Support Vector Machines: Slide 60

SVM Kernel Functions

- $K(\mathbf{a}, \mathbf{b}) = (\mathbf{a} \cdot \mathbf{b} + 1)^d$ is an example of an SVM Kernel Function
- Beyond polynomials there are other very high dimensional basis functions that can be made practical by finding the right Kernel Function
 - Radial-Basis-style Kernel Function:

$$K(\mathbf{a}, \mathbf{b}) = \exp\left(-\frac{(\mathbf{a} - \mathbf{b})^2}{2\sigma^2}\right)$$

- Neural-net-style Kernel Function:

$$K(\mathbf{a}, \mathbf{b}) = \tanh(\kappa \mathbf{a} \cdot \mathbf{b} - \delta)$$

σ , κ and δ are magic parameters that must be chosen by a model selection method such as CV or VCSRМ*

*see last lecture

Copyright © 2001, 2003, Andrew W. Moore

Support Vector Machines: Slide 61

VC-dimension of an SVM

- Very very very loosely speaking there is some theory which under some different assumptions puts an upper bound on the VC dimension as

$$\left\lceil \frac{\text{Diameter}}{\text{Margin}} \right\rceil$$

- where
 - *Diameter* is the diameter of the smallest sphere that can enclose all the high-dimensional term-vectors derived from the training set.
 - *Margin* is the smallest margin we'll let the SVM use
- This can be used in SRM (Structural Risk Minimization) for choosing the polynomial degree, RBF σ , etc.
 - But most people just use Cross-Validation

Copyright © 2001, 2003, Andrew W. Moore

Support Vector Machines: Slide 62

SVM Performance

- Anecdotally they work very very well indeed.
- Example: They are currently the best-known classifier on a well-studied hand-written-character recognition benchmark
- Another Example: Andrew knows several reliable people doing practical real-world work who claim that SVMs have saved them when their other favorite classifiers did poorly.
- There is a lot of excitement and religious fervor about SVMs as of 2001.
- Despite this, some practitioners (including your lecturer) are a little skeptical.

Copyright © 2001, 2003, Andrew W. Moore

Support Vector Machines: Slide 63

Doing multi-class classification

- SVMs can only handle two-class outputs (i.e. a categorical output variable with arity 2).
- What can be done?
- Answer: with output arity N, learn N SVM's
 - SVM 1 learns "Output==1" vs "Output != 1"
 - SVM 2 learns "Output==2" vs "Output != 2"
 - :
 - SVM N learns "Output==N" vs "Output != N"
- Then to predict the output for a new input, just predict with each SVM and find out which one puts the prediction the furthest into the positive region.

Copyright © 2001, 2003, Andrew W. Moore

Support Vector Machines: Slide 64

References

- An excellent tutorial on VC-dimension and Support Vector Machines:
 - C.J.C. Burges. A tutorial on support vector machines for pattern recognition. *Data Mining and Knowledge Discovery*, 2(2):955-974, 1998.
<http://citeseer.nj.nec.com/burges98tutorial.html>
- The VC/SRM/SVM Bible:
 - Statistical Learning Theory by Vladimir Vapnik, Wiley-Interscience; 1998

Copyright © 2001, 2003, Andrew W. Moore

Support Vector Machines: Slide 65

What You Should Know

- Linear SVMs
- The definition of a maximum margin classifier
- What QP can do for you (but, for this class, you don't need to know how it does it)
- How Maximum Margin can be turned into a QP problem
- How we deal with noisy (non-separable) data
- How we permit non-linear boundaries
- How SVM Kernel functions permit us to pretend we're working with ultra-high-dimensional basis-function terms

Copyright © 2001, 2003, Andrew W. Moore

Support Vector Machines: Slide 66